


PVC & CPVC Fittings & Valves

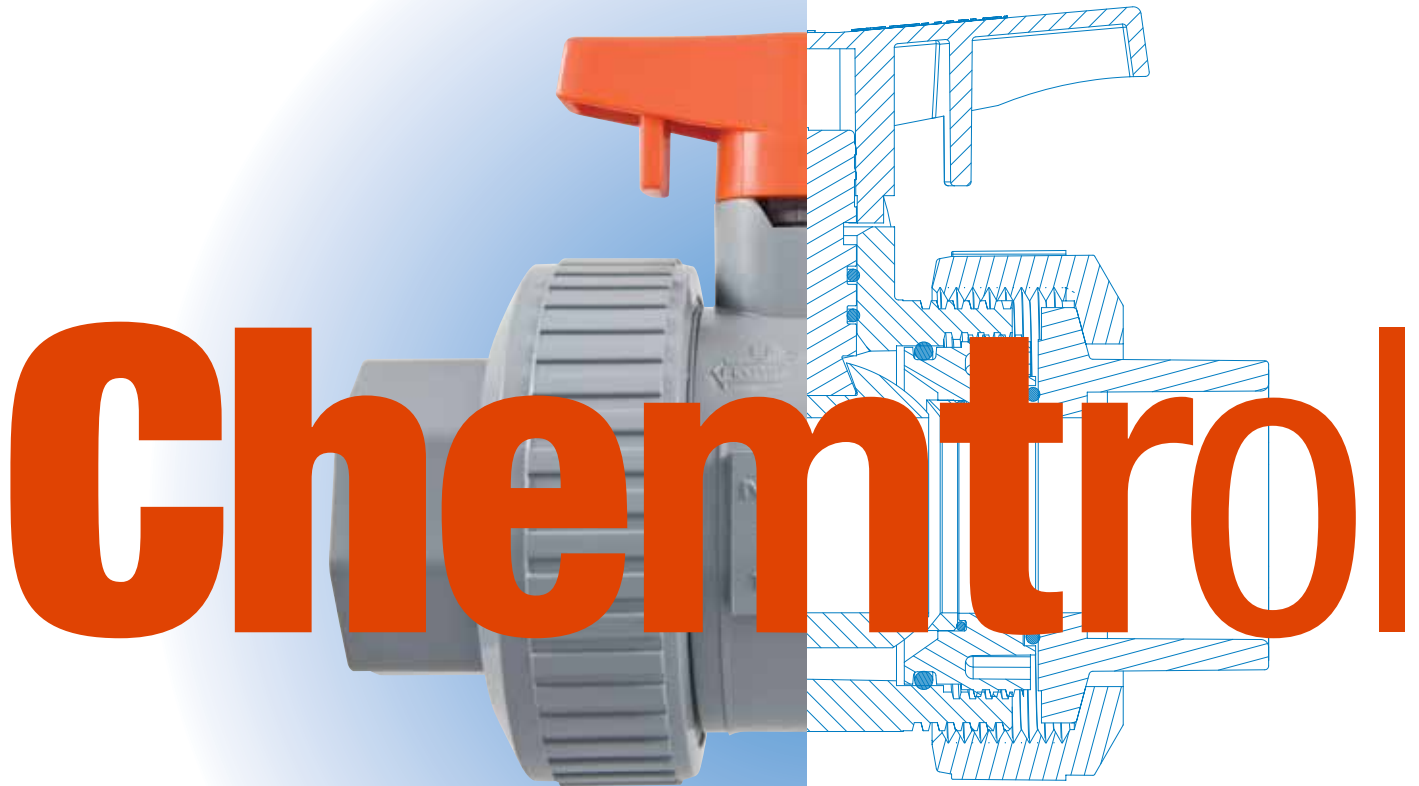

Our high quality line of thermoplastic valves, fittings, and pipe are the reason you can count on Chemtrol to fit your industrial flow-control applications.

Proven dependability.

Chemtrol flow-control products are unsurpassed in performance and longevity. With more than 60 years of experience in industrial thermoplastics, Chemtrol offers dependable products that work in the most demanding environments.

Innovative technology.

Great ideas flow from Chemtrol in PVC, CPVC, PP, and PVDF products for a wide range of flow-control applications.

Technical service and sales support.

Our technical specialists are some of the best in the business. As part of your team, they provide expert advice, solve problems, and assist you every step of the way.

Our distributors, sales professionals, and service representatives offer ideas, answer questions, and put their knowledge to work for you.

Education and training.

We help you learn about the benefits of thermoplastics through excellent programs: classes and seminars specific to your industry, presented at our manufacturing facility, or product and application-specific seminars conducted in the field. Our high-quality product and technical manuals are available on request, and a full listing of Chemtrol products is provided on our web site, www.chemtrol.com



| | |
|--|-----------|
| Introduction | 4 |
| Introduction to Chemtrol | |
| Materials | 5 |
| Chemical Resistance | 5 |
| Product Line | 6 |
| Product Guide | 8 |
| Ball Valves | |
| PVC & CPVC Tru-Bloc® Model D Ball Valves | 9 |
| PVC & CPVC Tru-Bloc® Model C Ball Valves | 10 |
| PVC & CPVC Vented (Bleach) Ball Valves | 11 |
| PVC & CPVC 3-Way Ball Valves | 12 |
| PVC Compact Economy Ball Valves | 14 |
| Butterfly Valves | |
| PVC & CPVC Butterfly Valves, Model C | 15 |
| PVC & CPVC Butterfly Valves, Model B | 16 |
| Ball Check Valves | |
| PVC & CPVC True Union Ball Check Valves | 17 |
| Angle & Globe Valves | |
| PVC Angle and Y-Pattern Globe Valves | 18 |
| Lab Valves | |
| PVC Chemcock™ and Calibrated-Needle Valves | 19 |
| Valve Accessories | 20 |
| PVC Schedule 80 Fittings | 24 |
| CPVC Schedule 80 Fittings | 34 |
| Reference Data | 43 |
| Standards | 53 |
| Product Specifications | 54 |
| Warranty | 59 |


Copies of the Chemtrol publications are available for download on www.chemtrol.com.

Introduction to Chemtrol

With more than 60 years of experience in industrial thermoplastics, Chemtrol offers dependable products that work in the most demanding environments.

The premium line of quality Chemtrol® valves are lightweight, corrosion-resistant, and maintenance-free – saving you time and money.

For specific recommendations of chemical compatibility, see the *Chem-Guide*. For engineering data related to plastic piping system design and installation and maintenance instructions, see the *Chemtrol Thermoplastic Piping Technical Manual*. All Chemtrol publications are available for download on www.chemtrol.com in PDF format.

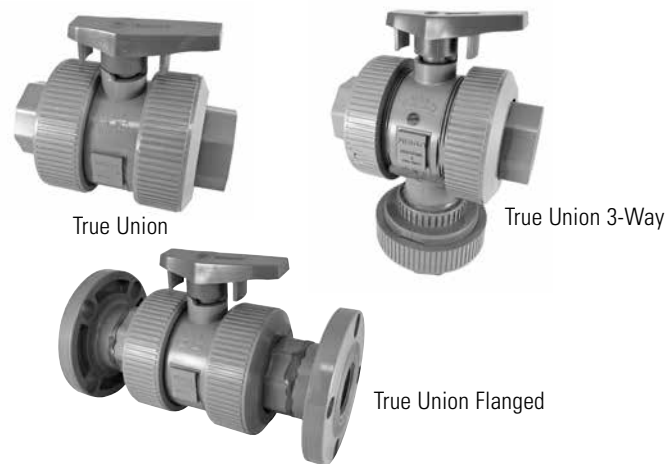

True Union Ball Valves

The True Union feature, a Chemtrol introduction, an exclusive Chemtrol introduction, so revolutionized the industrial plastic valve industry that it has become the standard followed by all major manufacturers. The purpose of the design is to permit the valve cartridge, i.e., the body containing all operational components, to be easily lifted from the piping system for servicing/replacement when the union nuts are backed off. Easy repair/replacement, interchangeability, distribution availability, technical service, and reliable quality are the synergistic rationale many plants and original equipment manufacturers have embraced while standardizing on Chemtrol® True Union Ball and Check Valves.

The laying length of the body and the heavy-duty modified-acme threads in the union connections to the body have not changed in the four distinct models' 40-year history of the valve. This permits fouled valve replacement with a new body cartridge, which will fit the old union nuts. No change in piping length is required.

The distinctive orange handle indicates "open/close" and direction of flow at a distance. And molded-in arrows on top of the handle dictate rotational direction to personnel for easy operation within 90° stops. For applications requiring handle removal, the D-ring stem flats indicate "open/close" and a molded-in arrow on top of the stem indicates flow direction.

The Evolution of Chemtrol® Ball Valves

As a result of continuous testing and improvements since the inception of the True Union Ball Valve, three distinct model changes have occurred. The original True Union Model A design had a seat-carrier that slid into the smooth bore of the valve body, held in place by the external nut and end connector. Tightening the external nut adjusted the compression of the PTFE seat onto the ball.

The first major evolution to the True Union Ball Valve, Model B, introduced the Tru-Bloc concept, a functional safety feature. With this design a separate threaded retainer locked the seat-carrier into the body and prevented the seat-carrier from being extruded out of the valve body when the external nut was removed. This change is intended to prevent pressure on the other side of the valve from ejecting the internal components and fluid medium out of the open valve end and to further prevent possible injury to persons or property.

The Model C seat-carrier design was modified to include an external thread which mated into the valve body threads, eliminating the separate retainer. This modification also eliminated the adjustment of the seat-carrier by the external nut and end connector, resulting in a sealing envelope that was independent of external forces. An energized O-ring was added under the PTFE seat that provided automatic adjustment to compensate for seat wear. This design modification continued the Tru-Bloc feature, preventing the seat carrier from being extruded out of the valve body when the external valve nut was removed.

Manufactured in PVC and CPVC through 2", the current Model D ball valve's seat-carrier internal threads and the external union nut threads were strengthened to provide an increased pressure rating of 250 psi at 73°F and improved the pressure ratings at higher temperatures. The end connector design was modified to provide wrench flats. The union nut OD was changed to provide improved gripping for strap wrenches. The Model D design continued the sealing envelope that was independent of external forces with an energized O-ring under the PTFE seat that provided automatic adjustment to compensate for seat wear. The Tru-Bloc® feature was also retained.

Materials

PVC

(Polyvinyl Chloride) PVC conforming to ASTM D1784, Classification 12454, formerly designated Type I, Grade 1, is the most frequently specified of all thermoplastic piping materials. It has been used successfully for more than 55 years in such diverse areas as chemical processing, industrial plating, chemical drainage, fresh and wastewater treatment, chilled and tower cooling water, deionized water manufacture and distribution, and irrigation sprinkler systems. PVC is characterized by high physical properties and resistance to chemical attack by strong acids and other oxidizers, alkalis, salt solutions, some organic chemical solutions, and many other chemicals. However, it is attacked by non-ionic surfactants, some vegetable oils (e.g., peanut), and many organic chemicals such as polar solvents (e.g., ketones), aromatics (i.e., benzene ring structure), and chlorinated hydrocarbons. The maximum service temperature of PVC is 140°F. With a design stress of 2,000 psi at 73°F, the long-term hydrostatic strength of PVC is as high as any of the major thermoplastic materials being used for solid piping systems. PVC is joined by solvent cementing, threading, or flanging.

CPVC (Corzan®)

(Chlorinated Polyvinyl Chloride) CPVC conforming to ASTM D1784, Classification 23447, is a resin created by the post-chlorination of a PVC polymer. The material's resistance to chemical attack is almost identical to that of PVC. And the physical properties of CPVC are very similar to those of PVC at 73°F, but the additional chlorine in the CPVC polymer extends its maximum service temperature to 210°F. For example, the design stress for CPVC is 2,000 psi at 73°F, identical to that of PVC. But its strength is only reduced to 500 psi at 180°F, as compared to 440 psi for PVC at 140°F. For more than 35 years, CPVC has proven to be an excellent material for hot corrosive liquids, hot and cold water distribution, and similar applications above the useful temperature range for PVC. CPVC may even be chosen over PVC in the 110°F to 140°F temperature range because its higher strength-at-temperature, requiring less frequent piping supports, can translate to a more favorable overall installed cost than PVC. CPVC is joined by solvent cementing, threading, or flanging.

PVDF (Kynar®)

(Polyvinylidene Fluoride) PVDF homopolymer conforming to ASTM D3222, Type I, Grade 2, is a tough, abrasion-resistant fluorocarbon material that has a design stress of 1,360 psi at 73°F and a maximum service temperature of 280°F. It has versatile chemical resistance to salts, strong acids, dilute bases, and many organic solvents, such as the aromatics (i.e., benzene ring structure), the aliphatics (i.e., paraffin, olefin, and acetylene hydrocarbons), and the chlorinated groups. And PVDF is ideally suited for handling wet or dry chlorine, bromine, and other halogens. However strong bases and some organic chemicals such as polar solvents (e.g., ketones) and esters attack it. No other solid thermoplastic piping material can approach the combined strength, working temperature, and chemical resistance characteristics of PVDF. It is joined by the thermo-sealing socket fusion process, threading, or flanging.

PVDF, absent of any color pigment, is transparent to ultraviolet light. So while PVDF is one of the few plastic materials that is not degraded by UV radiation, exposure of the fluid medium inside a piping system to direct sunlight can frequently adversely affect its stability. Therefore, all PVDF piping components that Chemtrol produces for general chemical service, contain an FDA-approved red pigment to mask the penetration of UV rays.

Natural Kynar® PVDF Type I (polymerized in emulsion) homopolymer is notably free of metallic ions and foreign organic compounds. And since the resin does not require processing or other external additives to aid manufacturing or long-term stability, the hard-polish surface of components will remain intact, so that piping systems will not release particulate to the fluid medium. Further, there will be no surface micropores to encourage biological growth. Natural Kynar® PVDF systems are intended for ultra high pure water and chemical services, such as electronics, pharmaceuticals, and processed foods and beverages.

PP

(Polypropylene) PP as specified by ASTM D4101, is a member of the polyolefin family of pure hydrocarbon plastics. Although PP has half the strength of PVC and CPVC, with a design stress of 1,000 psi at 73°F, it may have the most versatile chemical resistance of the thermoplastic materials identified as the sentinels of industrial piping. Consider the fact that there are no known solvents for PP. As a result, it has been the material of choice for drainage of mixed industrial chemicals for over 40 years. As pressure piping, PP has no peers for concentrated acetic acid or hydroxides. It is also suitable for milder solutions of most acids, alkalis, salts, and many organic chemicals, including solvents. The nemeses for PP are strong oxidizers, such as the hypochlorites and higher concentrations of sulfuric, nitric, and hydrofluoric acids. They are Environmental Stress Cracking (ESC) agents for PP, meaning that time-to-failure is a function of the combined variables of concentration and temperature of the fluid and stress. Although PP is not recommended for some organic chemicals, such as polar and chlorinated solvents and the aromatics, the concern is permeation through rather than catastrophic damage of the molecular chain.

Black PP used in Chemtrol products is formulated with a minimum 2.5% carbon black. The plastic pipe industry recognizes PP formulated with this level of carbon black as suitable for long-term outdoor service.

Chem-Pure® Natural PP utilized to produce Chemtrol® piping products was selected because of its extremely low content of metals, organic compounds other than naturally pure propylene, and free ions. No pigments or other adulterants (natural) are added to the plastic resin. Chem-Pure® systems are intended for high purity chemicals or DI water. Chem-Pure systems are intended as an economic alternative to the ultra high purity PVDF systems typically found in the highly sophisticated electronic semi-conductor industry.

FKM

(Fluoroelastomer) FKM is compatible with a broad spectrum of chemicals. Because of this extensive chemical compatibility, spanning wide ranges of concentration and temperature, FKM has gained wide acceptance as a material of construction for valve o-rings and seats. These fluoroelastomers can be used in most applications involving mineral acids (with the exception of HCl), salt solutions, chlorinated hydrocarbons, and petroleum oils. FKM is not recommended for most strong alkali solutions.

EPDM

(Ethylene-propylene-diene monomer) EPDM is a terpolymer elastomer that has good abrasion and tear resistance and offers excellent chemical resistance to a variety of salt, acidic, and organic chemical solutions. It is the best material for most alkali solutions and hydrochloric acid, but is not recommended for applications involving petroleum oils or most strong acids.



PTFE

(Polytetrafluoroethylene) PTFE has outstanding resistance to chemical attack by most chemicals and solvents. PTFE has a temperature rating of -200°F to +500°F. It is a self-lubricating material used as a seat and/or bearing material in most Chemtrol® valves.

Chemical Resistance

While thermoplastic piping systems are useful in general water service because they are light-weight, easy to install, and cost-effective, they excel in corrosive environments, such as water and wastewater treatment, food and pharmaceuticals, chemical processing, mining, power plants, oil refineries and more. Choosing the proper material for corrosive fluids can be handled by consulting the NIBCO Chem-Guide and understanding the effect that temperature will have upon plastic materials' strength.

Chemical resistance is the ability for a particular plastic material to maintain properties in contact with a chemical. To ensure comprehensive chemical compatibility, a piping system must take into consideration the chemical resistance of all system components, including, but not limited to, plastic components, solvent cements or thread pastes (if applicable), elastomeric seals, all valve components and lubricants. Testing under field conditions may be the best way to ensure selected materials will work in a particular application.

| | | | |
|---------------------------------|--|--|---|
| | | Polyvinyl Chloride (PVC)  | Chlorinated Polyvinyl Chloride (Corzan® CPVC)  |
| Typical Applications | | Chemical processing, industrial plating, chilled water distribution, chemical drainage, and irrigation systems | Systems for hot corrosive liquids, hot and cold water distribution, chemical processing, industrial plating, deionized water lines, chemical drainage, waste water treatment systems, and similar applications above the temperature range of PVC |
| Joining Methods | | Solvent cementing, threading, or flanging | |
| Max. Service Temperature | | 140° F/60° C | 210° F/99° C |
| Fittings | Schedule 80 | Socket– 1/4" through 12" Threaded– 1/4" through 4" | Socket– 1/4" through 12" Threaded– 1/4" through 4" |
| | Large diameter | 10" and 12" couplings, tees, 90° and 45° elbows, reducer bushings, and Van Stone flanges | 10" and 12" couplings, tees, 90° and 45° elbows, reducer bushings |
| Valves | Tru-Bloc®/True Union ball valves* | 1/2" through 6" socket, threaded, and flanged connections | 1/2" through 6" socket, threaded, and flanged connections |
| | Tru-Bloc®/True Union ball check valves | 1/2" through 4" with socket, threaded, or flanged ends | 1/2" through 4" with socket, threaded, or flanged ends |
| | Butterfly valves* | EPDM and FKM liner 2" through 10" Model C | EPDM and FKM liner 2" through 10" Model C, 3" only Model B |
| | Multiport valves* | True Union 3-way/3-position; 1/2" through 2" with socket, threaded, or flanged ends | True Union 3-way/3-position; 1/2" through 2" with socket, threaded, or flanged ends |
| | Specialty valves | Angle and Y pattern: 1/4" through 1" threaded Needle and Chemcock™: 1/4" threaded | |
| Pipe | | | |

*For pneumatic or electric actuation.

Refer to Chemtrol Technical Manuals for pressure ratings at various temperatures.

Kynar® is a registered trademark of Arkema Inc.
Corzan® is a registered trademark of The Lubrizol Corporation.

Polypropylene (PP)



Polyvinylidene Fluoride (Kynar® PVDF)



Black Polypropylene:

Clean chemical processes, hot corrosive liquids, industrial plating, waste treatment systems

Natural Polypropylene:

Deionized water systems, clean chemical processes, pharmaceutical operations, food processing

Red Kynar® PVDF:

Protects fluid medium from UV exposure, is an excellent material for general industrial applications, especially outdoor installations.

Natural Kynar® (unpigmented) PVDF:

Ideal for industries such as electronics, pharmaceuticals, and processed foods or beverages.

Socket heat fusion, threading, or flanging

180° F/82° C

180° F/82° C

280° F/138° C

280° F/138° C

IPS socket type—
1/2" through 6"
Threaded—
1/2" through 4"

IPS socket type—
1/2" through 4"
Threaded—
1/2" through 4"

IPS socket type—
1/2" through 6"
Threaded—
1/2" through 2"

IPS socket type—
1/2" through 6"
Threaded—
1/2" through 2"

1/2" through 4" with
socket, threaded, or
flanged ends

1/2" through 4" with
socket ends

1/2" through 4" with
socket, threaded, or
flanged ends

1/2" through 4" with
socket, threaded, or
flanged ends

1/2" through 4" with socket,
threaded, or flanged ends

1/2" through 2" with
socket ends

1/2" through 4" with socket,
threaded, or flanged ends

1/2" through 4" with socket,
threaded, or flanged ends

1/2" through 6" schedule 80 wall thicknesses

1/2" through 6" schedule 80 wall thicknesses

Kynar® is a registered trademark of Arkema Inc.

WARNING: DO NOT USE OR TEST THE PRODUCTS IN THIS CATALOG WITH COMPRESSED AIR OR OTHER GASES. FAILURE TO FOLLOW THIS WARNING CAN RESULT IN PERSONAL INJURY OR DAMAGE TO PROPERTY.

Revision 1/2/2018

Key to Chemtrol Valve Figure Number System

X XX XX - X - XX - SIZE

① ② ③ ④ ⑤ ⑥

① End Configurations

- S Socket
- F Flanged
- T Threaded (female)
- M Threaded (male)
- A Hose x Male Threaded
- W Wafer Style Butterfly
- U Universal (socket and threaded)

② Body Material

- 45 PVC Schedule 80
- 51 CPVC Schedule 80
- 61 Black Polypropylene (PP)
- 62 Chem-Pure® Natural Polypropylene (PP)
- 65 Red Kynar® PVDF
- 66 Natural Kynar® PVDF

③ Types of Valves

- AC Angle
- BC Ball Check
- BF Butterfly (Model B)
- BG Butterfly (Model C)
- CC Chemcock™
- CN Needle
- D2 Diverter (3-Way, 2-Position)
- FV Ball Foot
- M3 Multiport (3-Way, 3 Position)
- TB Tru-Bloc® True Union Ball Valve
- YP Y-Pattern

④ O-Ring Material

- E EPDM
- V FKM

⑤ Operating Mechanisms

- NO None
- LH Lever Handle, Manual
- RH Round Safety Handle, Manual
- GO Gear Operator, Manual

⑥ Size

State Valve Size

PVC and CPVC Tru-Bloc® True Union Ball Valve, Model D

| Construction Materials | | |
|--|-------------|------|
| Components ¹ | PVC | CPVC |
| 1. Handle | Orange PVC | |
| 2. Stem | PVC | CPVC |
| 3. Body | PVC | CPVC |
| 4. Seat-Carrier | PVC | CPVC |
| 5. Union Nut | PVC | CPVC |
| 6. End Connector | PVC | CPVC |
| 7. Ball | PVC | CPVC |
| 8. Seat ² ; (2 ea.) | PTFE | |
| 9. O-Ring ³ – Seat-Carrier; End Seal | FKM or EPDM | |
| 10. O-Ring ³ – Body; End Seal | | |
| 11. O-Ring ³ – Stem; OD Seal | | |
| 12. O-Ring ³ – Seat-Carrier; OD Seal | | |
| 13. O-Ring ³ – Seat-Carrier; Seat Energizer | | |
| 14. Flange – 2 ea. Socket-End | PVC | CPVC |
| 15. Plain-End Nipple; 2 ea. Spg x Spg | PVC | CPVC |

1 All components **except valve bodies** are available as replacement parts.

2 Each replacement **PTFE seat kit** contains two seats.

3 Each replacement O-ring kit contains all the O-rings required to refurbish a particular size True Union Ball or Check Valve (regardless of model or style), or a minimum of two pipe unions.

Chemtrol Figure Number

| Valve Style | Elasto-meric Trim | PVC | | | CPVC | | |
|-------------|-------------------|----------|----------|---------|----------|----------|---------|
| | | Soc. | Thd. | Flgd. | Soc. | Thd. | Flgd. |
| TU/TB | FKM | U45TB-V* | U45TB-V* | F45TB-V | U51TB-V* | U51TB-V* | F51TB-V |
| | EPDM | U45TB-E* | U45TB-E* | F45TB-E | U51TB-E* | U51TB-E* | F51TB-E |

* As original equipment, 1/2" - 2" True Union Tru-Bloc valve models are supplied with universal connectors (i.e., a set of both socket and thread end connectors).

Dimensions–Weights–Flow Coefficients

| Valve Size | A ¹ | B | C | D | K Flgd. | E Soc. | F Thd. | G Soc. | H Thd. | J Flgd. | PVC Approx. ² Wt. Lbs. | CPVC Approx. ² Wt. Lbs. |
|------------|----------------|------|------|------|------------|-----------|-----------|-----------|-----------|------------|--------------------------------------|---------------------------------------|
| 1/2 | 2.07 | 2.16 | 1.82 | .50 | 3.50 | 4.20 | 4.10 | 2.42 | 2.44 | 6.30 | 0.350 | 0.370 |
| 3/4 | 2.74 | 2.90 | 2.36 | .75 | 3.88 | 5.02 | 4.62 | 3.02 | 3.05 | 7.34 | 0.690 | 0.730 |
| 1 | 2.74 | 3.07 | 2.73 | 1.00 | 4.26 | 5.47 | 5.32 | 3.22 | 3.40 | 8.17 | 0.960 | 1.000 |
| 1 1/4 | 2.62 | 3.91 | 4.07 | 1.25 | 4.62 | 6.53 | 6.07 | 4.01 | 4.06 | 9.41 | 2.155 | 2.255 |
| 1 1/2 | 2.62 | 3.91 | 4.07 | 1.50 | 5.00 | 6.89 | 6.23 | 4.10 | 4.18 | 10.05 | 2.190 | 2.315 |
| 2 | 3.12 | 4.71 | 5.23 | 2.00 | 6.00 | 8.04 | 7.39 | 5.01 | 5.19 | 11.44 | 4.410 | 4.670 |


Maximum Non-Shock Pressure Ratings (psi) vs. Temperatures

| "Operating Temperature(F)" | PVC | CPVC |
|----------------------------|-----|------|
| 73 | 250 | 250 |
| 80 | 250 | 250 |
| 90 | 240 | 250 |
| 100 | 180 | 250 |
| 110 | 140 | 225 |
| 120 | 115 | 180 |
| 130 | 80 | 160 |
| 140 | 60 | 140 |
| 150 | NR | 115 |
| 160 | NR | 95 |
| 170 | NR | 80 |
| 180 | NR | 70 |
| 190 | NR | 60 |
| 200 | NR | 50 |
| 210 | NR | NR |

Corzan® is a registered trademark of The Lubrizol Corporation.

Features

- Rated at 250 psi with non-shock water service at 73°F
- Corzan® HP CPVC rated at 130 psi at 180°F, see chart in Reference Data section for maximum service temperature.
- Retains laying length of previous models, full interchangeable cartridge, nuts and end connectors
- Designed, with an energizer O-ring beneath the PTFE seat, Model D and C valves automatically adjust for seat wear.
- Full-port design produces minimum flow restriction with the lowest possible pressure-drop
- Improved union nut grip style and flats on end connectors
- Universal product includes socket and threaded end connections
- Ergonomic handle with built-in carrier wrench
- Valves are manufactured and assembled without exposure to silicone compounds. Silicone-free lubricant is used to assemble all ball valves.

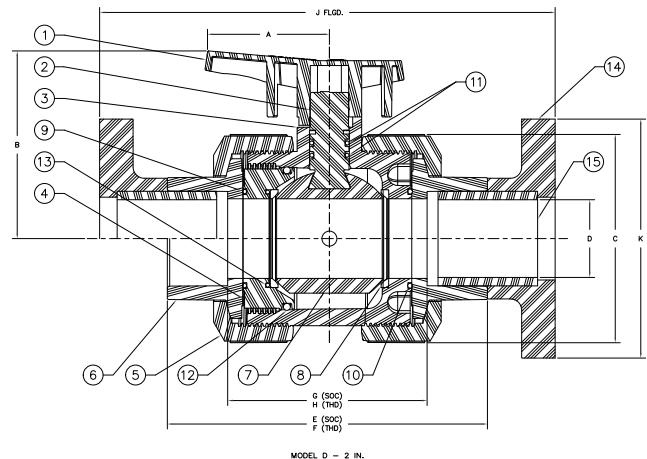

Fluid Flow Coefficient

| Valve Size | C _v ³ TU |
|------------|--------------------------------|
| 1/2 | 6.4 |
| 3/4 | 38.7 |
| 1 | 58.2 |
| 1 1/4 | 61.7 |
| 1 1/2 | 117.4 |
| 2 | 178.4 |

1 Handle is not symmetrical about centerline. Dimensions shown represent the longest operational radius. The handle position is correctly shown for the 1/2" - 3" True Union valve style.

2 Weight for 1/2" - 2" TU figures includes both sets of end connectors.

3 C_v values computed for basic valve laying lengths (G).

PVC and CPVC Tru-Bloc® True Union Ball Valve, Model C

Construction Materials

| Components ¹ | PVC | CPVC |
|--|-------------|------|
| 1. Handle | Orange PVC | |
| 2. Stem | PVC | CPVC |
| 3. Body | PVC | CPVC |
| 4. Seat-Carrier | PVC | CPVC |
| 5. Union Nut | PVC | CPVC |
| 6. End Connector | PVC | CPVC |
| 7. Ball | PVC | CPVC |
| 8. Seat ² ; (2 ea.) | PTFE | |
| 9. O-Ring ³ – Seat-Carrier; End Seal | FKM or EPDM | |
| 10. O-Ring ³ – Body; End Seal | | |
| 11. O-Ring ³ – Stem; OD Seal | | |
| 12. O-Ring ³ – Seat-Carrier; OD Seal | | |
| 13. O-Ring ³ – Seat-Carrier; Seat Energizer | | |
| 14. Flange – 2 ea. Socket-End | PVC | CPVC |
| 15. Plain-End Nipple; 2 ea. Spg x Spg | PVC | CPVC |
| 16. Stem; Friction Washer (4" & 6" Only) | PTFE | |
| 17. Handle Bolt (4" & 6" Only) | PVC | |

1 All components **except valve bodies** are available as replacement parts.

2 Each replacement **PTFE seat kit** contains two seats.

3 Each replacement O-ring kit contains all the O-rings required to refurbish a particular size True Union Ball or Check Valve (regardless of model or style), or a minimum of two pipe unions.

Chemtrol Figure Number

| Valve Style | Elasto-meric Trim | PVC | | | CPVC | | |
|-------------|-------------------|---------|---------|---------|---------|---------|---------|
| | | Soc. | Thd.* | Flgd. | Soc. | Thd.* | Flgd. |
| TU/TB | FKM | S45TB-V | T45TB-V | F45TB-V | S51TB-V | T51TB-V | F51TB-V |
| | EPDM | S45TB-E | T45TB-E | F45TB-E | S51TB-E | T51TB-E | F51TB-E |



* Thread end connections are not available for 6" valves.

Dimensions–Weights–Flow Coefficients

| Valve Size | A ¹ | B | C | D | N | P | E Thd. | F Soc. | G Soc. | H Flgd. | Approx. ² Wt. Lbs. |
|----------------|----------------|------|------|------|-------|-------|--------|--------|--------|---------|-------------------------------|
| 3 | 4.00 | 5.59 | 7.18 | 3.00 | 7.42 | 7.50 | 10.39 | 10.39 | 6.58 | 14.63 | 11.25 |
| 4 | 8.00 | 6.05 | 8.78 | 4.00 | 8.52 | 9.00 | 12.22 | 12.22 | 7.66 | 17.63 | 17.68 |
| 6 ⁴ | 8.00 | 6.05 | 8.78 | 4.00 | 11.90 | 11.05 | NA | 30.22 | 24.16 | 24.08 | 29.25 |

Fluid Flow Coefficient

| Valve Size | C _v ³ TU |
|----------------|--------------------------------|
| 3 | 1348 |
| 4 | 2602 |
| 6 ⁴ | 2602 |

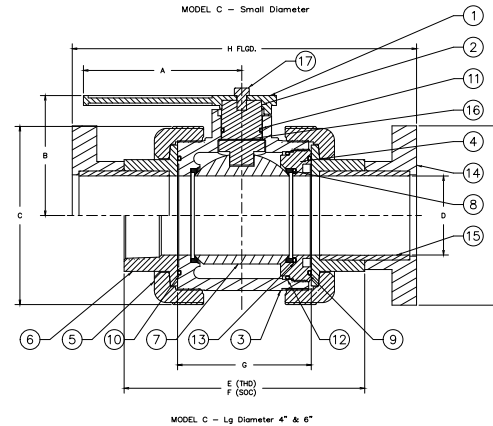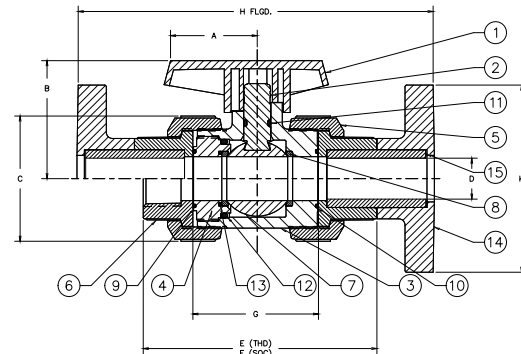

Maximum Non-Shock Pressure Ratings (psi) vs. Temperature

Maximum Operating Pressure (psi) vs. Temperature

| Operating Temperature (F) [*] | PVC | CPVC |
|--|------|------|
| 100 | 150 | 150 |
| 110 | 135 | 140 |
| 120 | 110 | 130 |
| 130 | 75 | 120 |
| 140 | 50 | 110 |
| 150 | N.R. | 100 |
| 160 | N.R. | 90 |
| 170 | N.R. | 80 |
| 180 | N.R. | 70 |
| 190 | N.R. | 60 |
| 200 | N.R. | 50 |
| 250 | N.R. | N.R. |
| 280 | N.R. | N.R. |

N.R. - Not recommended

Features

- Rated at 150 psi with non-shock water service at 73°F.
- Designed with an energizer O-ring beneath the PTFE seat, Model D and C valves automatically adjust for seat wear.
- Full-port design produces minimum flow restriction with the lowest possible pressure-drop. 6" ball valve is reduced port.
- Valves are manufactured and assembled without exposure to silicone compounds. Silicone-free lubricant is used to assemble all ball valves.

1 Handle is not symmetrical about center line. Dimensions shown represent the longest operational radius. The handle position is correctly shown for the 3" True Union valve style, but the position must be rotated 180° from that shown for the 4" - 6" True Unions.

2 Weight includes socket end connections only for 3" - 6" sizes. The material represented is PVC in all cases.

3 C_v values computed for basic valve laying lengths (G).

4 The 6" ball valve is a Venturi design derived from the 4" valve: a 4" end connector and a 6" coupling are connected by a 6" x 4" Venturied reducer, with a union nut captured within the assembly. Threaded end connection not available.

PVC and CPVC Tru-Bloc® True Union Vented (Bleach) Ball Valve, Model D

The Problem

Sodium hypochlorite, used in water treatment, aquatic centers, and paper and textile applications, can become trapped in the body cavity of a closed ball valve and create conditions that may result in damage to the valve or system as a result of unstable chemical decomposition.

The Chemtrol Solution

The Vented Ball Valve is a special factory modification to a PVC or CPVC True Union Ball Valve that effectively vents sodium hypochlorite out-gassing to the pressure port. In addition, the inner valve surfaces are kept constantly wetted to ensure problem-free use of the ball valves in bleach transfer and injection applications.



Background

In the search for a safer alternative to chlorine vacuum gas injection, fresh and wastewater treatment, paper and textile plants, and aquatic centers are converting to the use of sodium hypochlorite as a disinfectant or bleaching agent. A high pH level characterizes commercial bleach, which consists of a nominal 15% solution of sodium hypochlorite along with approximately 1-2% of sodium hydroxide to act as a chemical stabilizer. Known as a good oxidizer, the solution has been found to cause stress cracking in polyethylene and polypropylene materials. And metallic materials react, causing rapid decomposition of the “hypo.” However, PVC and CPVC, with fluorocarbon rubber (FKM) seals, have been successfully used for years to handle this aggressive chemical solution.


Some system design considerations are important, though. Heat, time, and positive ions are enemies of bleach stability. When a ball valve is closed in periods of inactivity, the bleach will decompose over time liberating oxygen gas. The decomposition rate is increased by heat absorbed from sun shining on exposed piping, or by reaction heat resulting from debris trapped in a ball valve body between the ball and its seats. Gas pressure may slowly build in the closed valve cavity, or quite rapidly in the reactive case. Such conditions may result in damage to the valve or system.

Also, evaporation of sodium hypochlorite in the ball cavity can lead to the formation of crystalline residue that eventually embeds in the PTFE seats of a ball valve and significantly raises the turning torque due to excessive wear on the ball by fouled seats. Such conditions may result in a broken valve stem, frozen valve ball, or other damage to the valve or system.

The Chemtrol® Vented Ball Valve offers a viable solution for sodium hypochlorite transfer and injection applications. Our unique factory-assembled bleach ball valve has effectively eliminated the problems associated with these uses. By ensuring that all inner surfaces of the valve are kept constantly wetted and vented to the upstream side when the valve is in the closed position, we have eliminated the conditions required for gas accumulation and caustic crystallization in the body cavity.

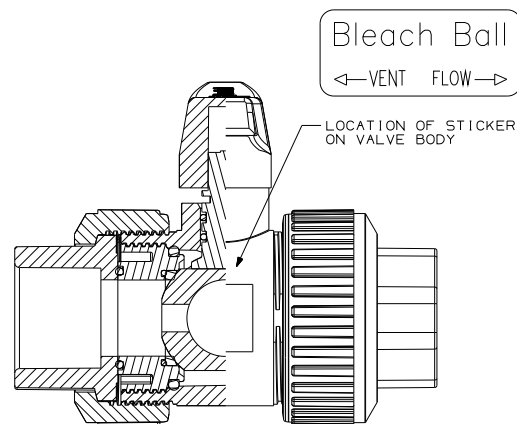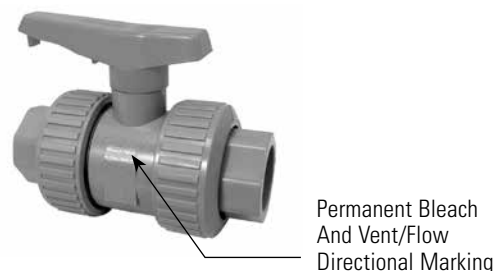


PVC and CPVC 3-Way Ball Valves, True Union 3-Position (Multiport) and 2-Position (Diverter)

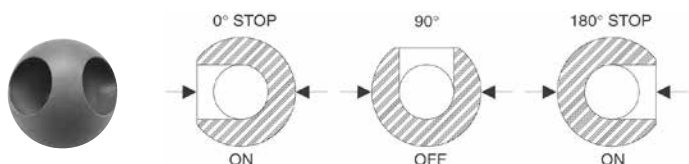

The Chemtrol True Union Multiport Valve is a 3-Way/3 Position Ball Valve

It is ideally suited for applications where flow direction and on/off controls are needed. When the handle is rotated 180°, the three (3) positions of on, off and on may direct flow from the branch center-inlet to one side run-outlet (at the 0° stop position), then to shut-off (at the 90° position), and then to the opposite side run-outlet (at the 180° stop position). The multiport may also be used to alternately direct flow from either of the side run-inlet ports to the branch center-outlet port, with shut-off at the mid-position (when handle is perpendicular to the body). Cross-contamination of the two inlet streams is prevented by all intermediate positions between the 180° stops.

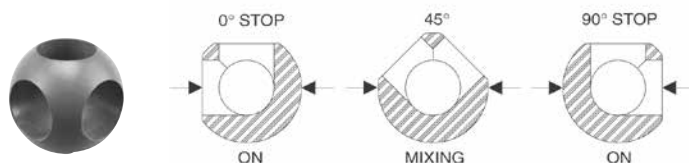

The Chemtrol True Union Diverter Valve is a 3-Way/3 Position Ball Valve

It is used for applications where a quarter-turn will achieve diversion of flow, but shut-off control is not required. When the handle is rotated 90°, the two positions of on and on may direct flow from the branch center-inlet to one side run-outlet (at the 0° stop position), and then the opposite side run-outlet (at the 90° stop position). The diverter may also be used to alternately divert flow either of the side run-inlet ports to the branch center-inlet port. The internal porting of the diverter makes no provision for shut-off. Therefore, the valve can be used for proportional mixing at all intermediate positions between the 90° stops.

Features

- Rated at 150 psi with non-shock water service at 73°F
- **FLOW** externally molded onto the body to indicate the fixed end containing a PTFE seat.
- **ADJ** externally molded onto the body to indicate the seat carrier end of the valve. Adjustment of this union nut can compensate for wear of PTFE seats, with no production loss to remove valve for internal adjustment.
- Valves are manufactured and assembled without exposure to silicone compounds.
- Full port design produces minimum flow restriction with the lowest possible pressure drop for 90° porting.



Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC | CPVC |
|-----------------------------|------|------|
| 100 | 150 | 150 |
| 110 | 135 | 140 |
| 120 | 110 | 130 |
| 130 | 75 | 120 |
| 140 | 50 | 110 |
| 150 | N.R. | 100 |
| 160 | N.R. | 90 |
| 170 | N.R. | 80 |
| 180 | N.R. | 70 |
| 190 | N.R. | 60 |
| 200 | N.R. | 50 |
| 250 | N.R. | N.R. |
| 280 | N.R. | N.R. |

N.R. - Not recommended

Chemtrol Figure Numbers


| Valve Style | Elastomeric Trim | PVC Soc. | Thd. | CPVC Soc. | Thd. |
|--|------------------|--------------------|--------------------|--------------------|--------------------|
| 1/2" – 2" Multiport (3-Way/3-Position) | FKM EPDM | S45M3-V S45M3-E | T45M3-V T45M3-E | S51M3-V S51M3-E | T51M3-V T51M3-E |
| 1/2" – 2" Diverter (3-Way/3-Position) | FKM EPDM | S45D2-V S45D2-E | T45D2-V T45D2-E | S51D2-V S51D2-E | T51D2-V T51D2-E |

| Construction Materials | | |
|--|-------------|------|
| Components ¹ | PVC | CPVC |
| 1. Handle | | |
| 2. Stem | PVC | CPVC |
| 3. Body | PVC | CPVC |
| 4. Seat-Carrier | PVC | CPVC |
| 6. Union Nut | PVC | CPVC |
| 7. End Connector | PVC | CPVC |
| 8. Ball | PVC | CPVC |
| 9. Seat ² ; (2 ea.) | PTFE | |
| 10. O-Ring ³ – Seat-Carrier; End Seal | FKM or EPDM | |
| 11. O-Ring ³ – Body; End Seal | | |
| 12. O-Ring ³ – Stem; OD Seal | | |
| 13. O-Ring ³ – Seat-Carrier; OD Seal | | |
| 14. O-Ring ³ – Branch Union; End Seal | FKM or EPDM | |

¹ All components except valve bodies are available as replacement parts.

² Each replacement PTFE seat kit contains two seats.

³ Each replacement O-ring kit contains all the O-rings required to refurbish a particular size True Union Ball or Check Valve (regardless of model or style), or a minimum of two pipe unions.

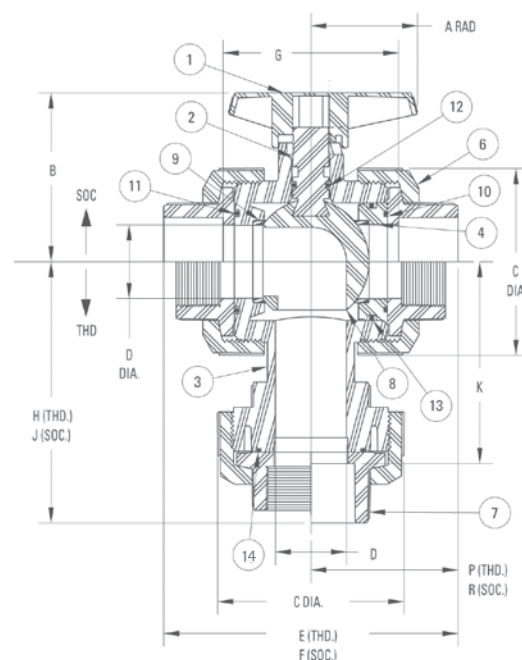

Dimensions–Weights–Flow Coefficients

| Valve Size | Soc. & Thd Figures | | | | Socket Figures | | | | | | Threaded Figures | | | | Fluid Flow Coefficient |
|------------|--------------------|------|------|------|----------------|------|------|------|------|-------------------------------|------------------|------|------|-------------------------------|------------------------|
| | A ¹ | B | C | D | F | G | J | K | R | Approx. ² Wt. Lbs. | E | H | P | Approx. ² Wt. Lbs. | |
| 1/2 | 2.07 | 1.94 | 2.00 | 0.50 | 4.19 | 2.41 | 3.56 | 2.69 | 2.13 | 0.64 | 4.00 | 3.50 | 2.06 | 0.60 | 8 |
| 3/4 | 2.74 | 2.50 | 2.44 | 0.75 | 5.00 | 2.97 | 4.19 | 3.19 | 2.50 | 1.15 | 4.63 | 4.00 | 2.31 | 1.05 | 19 |
| 1 | 2.74 | 2.69 | 2.86 | 1.00 | 5.50 | 3.22 | 4.63 | 3.50 | 2.75 | 1.59 | 5.18 | 4.44 | 2.63 | 1.50 | 36 |
| 1 1/4 | 2.62 | 3.74 | 4.08 | 1.25 | 6.47 | 3.94 | 5.88 | 4.63 | 3.25 | 3.43 | 6.10 | 5.63 | 3.06 | 3.24 | 55 |
| 1 1/2 | 2.62 | 3.74 | 4.08 | 1.25 | 6.76 | 3.98 | 6.00 | 4.63 | 3.38 | 3.62 | 6.15 | 5.63 | 3.06 | 3.37 | 55 |
| 2 | 3.12 | 4.25 | 5.25 | 2.00 | 8.01 | 4.98 | 7.08 | 5.63 | 3.96 | 7.02 | 7.35 | 6.81 | 3.62 | 6.25 | 149 |

¹ Handle is not symmetrical about stem centerline. Dimension shown represents the longest operational radius.

² Weights shown for socket figures are CPVC models. Weights for threaded figures are PVC models.

³ C_v values were computed using equivalent cylinder length for 90° turn with full bore.

* 1 1/2" valve has conventional port on center outlet.

PVC Compact Economy Ball Valve

150 psi at 73°F water–non-shock



Features


- For water distribution in industrial, residential, commercial and agricultural applications.
- Multiple industrial uses
- Durable one-piece molded body
- Excellent flow characteristics
- Socket and threaded end connections per ASTM D2467 for Schedule 80 PVC pipe fittings
- NPT threads per ASME B1.20.1
- Rated for 150 psi water service at 73°F and 50 psi service at 140°F
- Convenient 1/4 turn operation
- Meets NSF/ANSI 14 standard

Construction Materials

| Part | Specification |
|------------------|-------------------|
| 1. Body | PVC |
| 2. Seat Seal (2) | PTFE |
| 3. Ball | PVC |
| 4. O-Ring | EPDM, FKM |
| 5. Handle | ABS |
| 6. Bolt | Zinc-Plated Steel |
| 7. Cap | ABS |

Chemtrol Figure Numbers

| Material | O-Rings | Ends | (1/2" - 2") |
|----------|---------|------|-------------|
| PVC | EPDM | Soc. | S45CE-E |
| PVC | EPDM | Thd. | T45CE-E |
| PVC | FKM | Soc. | S45CE-V |
| PVC | FKM | Thd. | T45CE-E |

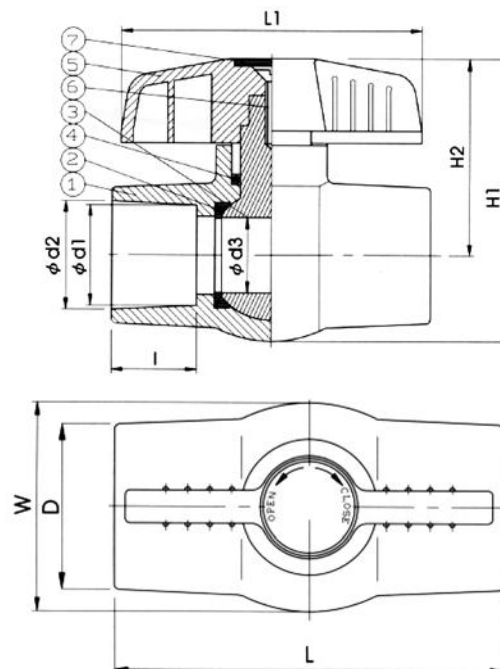

DIMENSIONS—WEIGHTS—QUANTITIES

| Size | | | | | | | | | | | | | | Fluid Flow Coefficient Cv |
|-------|----|----------------|------|------|------|------|------|------|------|------|------|------|-------------|---------------------------|
| In. | mm | Thd./In. (NPT) | d1 | d2 | d3 | D | L | L1 | I | H1 | H2 | W | Weight/lbs. | |
| 1/2 | 15 | 14 | 0.84 | 0.85 | 0.55 | 1.18 | 3.27 | 2.76 | 0.87 | 2.44 | 1.69 | 1.50 | 0.18 | 8.84 |
| 3/4 | 20 | 14 | 1.05 | 1.06 | 0.79 | 1.50 | 3.74 | 3.46 | 1.00 | 3.07 | 2.13 | 1.93 | 0.18 | — |
| 1 | 25 | 11.5 | 1.31 | 1.32 | 0.98 | 1.77 | 4.17 | 3.94 | 1.12 | 3.66 | 2.56 | 2.24 | 0.49 | 25.24 |
| 1 1/4 | 32 | 11.5 | 1.65 | 1.67 | 1.18 | 2.13 | 4.48 | 3.94 | 1.25 | 3.86 | 2.64 | 2.48 | 0.64 | 38.53 |
| 1 1/2 | 40 | 11.5 | 1.89 | 1.91 | 1.42 | 2.44 | 5.12 | 4.29 | 1.38 | 4.53 | 3.07 | 2.95 | 0.94 | 51.28 |
| 2 | 50 | 11.5 | 2.39 | 2.39 | 1.83 | 3.03 | 5.79 | 5.28 | 1.50 | 5.31 | 3.50 | 3.62 | 1.50 | 96.67 |

Maximum Operating Pressure (psi) vs. Temperature


| "Operating Temperature (F)" | PVC |
|-----------------------------|------|
| 100 | 150 |
| 110 | 135 |
| 120 | 110 |
| 130 | 75 |
| 140 | 50 |
| 150 | N.R. |

N.R. - Not recommended



WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

PVC and CPVC Butterfly Valves, Model C


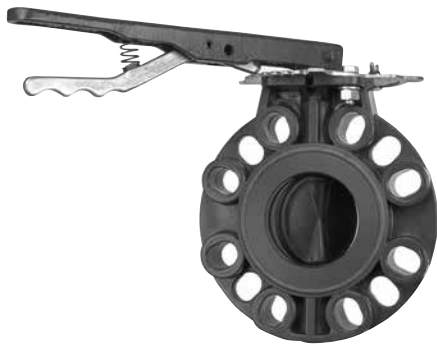


Construction Materials

| Part | Material |
|-------------------------|---------------------------------------|
| 1. Upper Stem | 416 Stainless Steel |
| 2. Bushings (3) | Stainless Steel backed PTFE |
| 3. O-Ring Stem Seal (2) | EPDM or FKM |
| 4. Body | CPVC or PVC |
| 5. Disk | EPDM or FKM Encapsulated Ductile Iron |
| 6. Lower Stem | 416 Stainless Steel |
| 7. Retaining Ring (2) | 304 Stainless Steel |
| 8. Plug | LDPE (Polyethylene) |
| 9. Face o-ring (2) | EPDM or FKM |
| 10. Handle w/Lever | Malleable Iron with Epoxy Coating |
| 11. Throttle Plate | Zinc Plated Steel |
| 12. Position Lock | Zinc Plated Steel |




Features

- Rated at 150 psi with non-shock service at 73°F
- Bolt hole pattern compatible with Class 150 ASME B16.5; BS 1560 class 150; DN 200 ISO 2084 PN 10; and DN 200 DIN EN 1092 PN 10
- Built-in O-ring face-seals require no gaskets between mating flanges.
- A hole in the lever handle provides a blockage point for trigger lock operation, thus, locking the valve in the off position or any of the 9 increments of opening (10° each).
- Black graphite and fluorocarbon lubricant is used to assemble Model C butterfly valves.
- NIBCO electric and pneumatic actuation available.
- Valves with CPVC and/or FKM launching soon. Contact NIBCO Technical Services for currently available sizes and materials.



LEVER OPERATED

BARE STEM

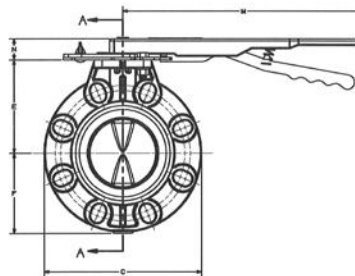

SECTION A

Cv TABLE MODEL C BUTTERFLY VALVE GPM/1.0 PSI ΔP

| VALVE | DEGREE OPEN | | | | | | | | | |
|----------|-------------|------|-------|-------|--------|--------|--------|--------|----------|--|
| SIZE NPS | 10° | 20° | 30° | 40° | 50° | 60° | 70° | 80° | 90° FULL | |
| 2 | 0 | 0 | 3.2 | 13.2 | 26.2 | 44.4 | 67.5 | 80 | 82.7 | |
| 2.5 | 0 | 0 | 5.5 | 20.4 | 35.5 | 63.4 | 101 | 161.8 | 183.5 | |
| 3 | 0 | 0.7 | 13.8 | 36.8 | 58.7 | 95.7 | 154 | 280.2 | 312 | |
| 4 | 0 | 0.9 | 24.3 | 68.6 | 128 | 208.5 | 338.5 | 535.3 | 585.6 | |
| 6 | 0 | 27.7 | 124.2 | 220.9 | 340.1 | 580.7 | 854.7 | 1226.3 | 1357.8 | |
| 8 | 2.8 | 87 | 209.8 | 372.6 | 648.1 | 1013.1 | 1484.1 | 2353.4 | 2860 | |
| 10 | 6 | 87.6 | 340 | 679 | 1068.9 | 1719.2 | 2724.8 | 4349.9 | 5013 | |

Chemtrol Figure Numbers

| Seat Material | Operating Mechanism | PVC | CPVC |
|---------------|--------------------------------|-----------|-----------|
| EPDM | No Operator | W45BG-E-0 | W51BG-E-0 |
| | With Lever Handle ¹ | W45BG-E-3 | W51BG-E-3 |
| | With Gear Operator | W45BG-E-5 | W51BG-E-5 |
| FKM | No Operator | W45BG-V-0 | W51BG-V-0 |
| | With Lever Handle ¹ | W45BG-V-3 | W51BG-V-3 |
| | With Gear Operator | W45BG-V-5 | W51BG-V-5 |

¹ 10" is available with lever handle

Dimensions—Weights

| Valve Size | A | B | C | D | E | F | G | H | I | J | K | L | M | Handle N | P | Approx. ¹ Wt./Lbs. |
|------------|------|------|-------|------|------|------|------|------|------|------|------|------|--------------------|----------|------|-------------------------------|
| 2 | 1.93 | 1.69 | 6.38 | 1.37 | 3.94 | 3.27 | 3.25 | 2.75 | 0.44 | 3.25 | 0.37 | 0.50 | 10.50 | 1.19 | 6.19 | |
| 2 1/2 | 2.44 | 1.81 | 7.16 | 1.28 | 4.13 | 3.67 | 3.25 | 2.75 | 0.44 | 3.25 | 0.37 | 0.50 | 10.50 | 1.19 | 6.19 | |
| 3 | 2.86 | 1.81 | 7.72 | 1.21 | 4.41 | 3.96 | 3.25 | 2.75 | 0.44 | 3.25 | 0.37 | 0.50 | 10.50 | 1.19 | 6.19 | |
| 4 | 3.83 | 2.06 | 8.98 | 1.26 | 5.30 | 4.56 | 3.25 | 2.75 | 0.44 | 3.25 | 0.50 | 0.66 | 10.50 | 1.19 | 6.19 | |
| 6 | 5.75 | 2.20 | 11.21 | 1.28 | 7.09 | 5.73 | 3.25 | 2.75 | 0.44 | 3.25 | 0.56 | 0.78 | 13.75 | 1.23 | 6.19 | |
| 8 | 7.73 | 2.36 | 13.60 | 1.36 | 7.99 | 6.95 | 3.25 | 2.75 | 0.44 | 3.25 | 0.56 | 0.78 | 13.75 | 1.23 | 6.19 | |
| 10 | 9.56 | 2.68 | 16.44 | 1.34 | 9.84 | 8.34 | 5.00 | 4.01 | 0.56 | 4.75 | 0.75 | 1.06 | Gear Operator Only | | | |

¹ Operator not included in weight.

Weight is for PVC.

Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC | CPVC | "Operating Temperature (F)" | PVC | CPVC |
|-----------------------------|-----|------|-----------------------------|------|------|
| 100 | 150 | 150 | 150 | N.R. | 100 |
| 110 | 135 | 140 | 160 | N.R. | 90 |
| 120 | 110 | 130 | 170 | N.R. | 80 |
| 130 | 75 | 120 | 180 | N.R. | 70 |
| 140 | 50 | 110 | 190 | N.R. | N.R. |

N.R. - Not recommended

WARNING: DO NOT USE OR TEST THE PRODUCTS IN THIS CATALOG WITH COMPRESSED AIR OR OTHER GASES. FAILURE TO FOLLOW THIS WARNING CAN RESULT IN PERSONAL INJURY OR DAMAGE TO PROPERTY.

Revision 1/2/2018

CPVC and PVC Butterfly Valves, Model B



Section A-A

Construction Materials

| Part | Material |
|-------------------------------------|---|
| 2. Top Bearing | Glass-Filled PTFE |
| 3. O-Ring Seal (4 required) | FKM or EPDM |
| 4. Disk/Stem | PVC ¹ w/ 316 Stainless Hex Shaft Insert-Molded |
| 5. Body (2 required – mirror image) | 3" - CPVC ¹ ; 4" & 6" - PVC |
| 6. Seat/Boot | FKM or EPDM w/ GF-PTFE Upper & Lower Bearing-Bushings Insert-Molded |
| 7. Cap Screws; | 3" Valve (6) ea. 1/4"-20 x 7/8" Long Zinc Coated 4" Valve (6) ea. 5/16"-18 x 1" Long Zinc Coated 6" Valve (6) ea. 5/16"-18 x 1-1/2" Long & (2) ea. 5/16"-18 x 1" Long Zinc Coated |
| 8. Hex Nuts; | 3" Valve (6) ea. 1/4"-20 Zinc Coated 4" Valve (6) ea. 5/16"-18 Zinc Coated 6" Valve (8) ea. 5/16"-18 Zinc Coated |
| 9. Lever Handle Assembly | |
| Handle w/Lever Lock | Malleable Iron |
| Throttling Plate | Zinc Plated Steel |
| Position Lock | Zinc Plated Steel |


¹ Body, disk/stem, and throttle plate for 3" size are available in CPVC only.

C_v Table

| Size | Degrees Open | | | | | | | | |
|------|--------------|-----|-----|-----|-----|-----|-----|------|------|
| | 10° | 20° | 30° | 40° | 50° | 60° | 70° | 80° | 90° |
| 3 | 4.3 | 16 | 35 | 62 | 94 | 135 | 180 | 235 | 290 |
| 4 | 8.6 | 34 | 76 | 137 | 215 | 310 | 420 | 550 | 690 |
| 6 | 17.5 | 67 | 200 | 265 | 410 | 580 | 790 | 1040 | 1340 |

Features

- Rated at 150 psi with non-shock service at 73°F (6" size 115 psi)
- Mates between ASME B16.5, Class 150; ISO 2084 PN 10, DN 80; and DIN EN 1092, PN 10, DN 80. Both 4-bolt and 8-bolt patterns are in 3" size.
- PVC overmolded 316 stainless hex shaft not exposed to the liquid
- Top bearing, as well as the upper and lower bushings, are glass-filled PTFE for ease of operation and maximum service life.
- Seat/boot design eliminates need for gaskets between mating flanges.
- Silicone-free lubricant is used to assemble Model B butterfly valves.

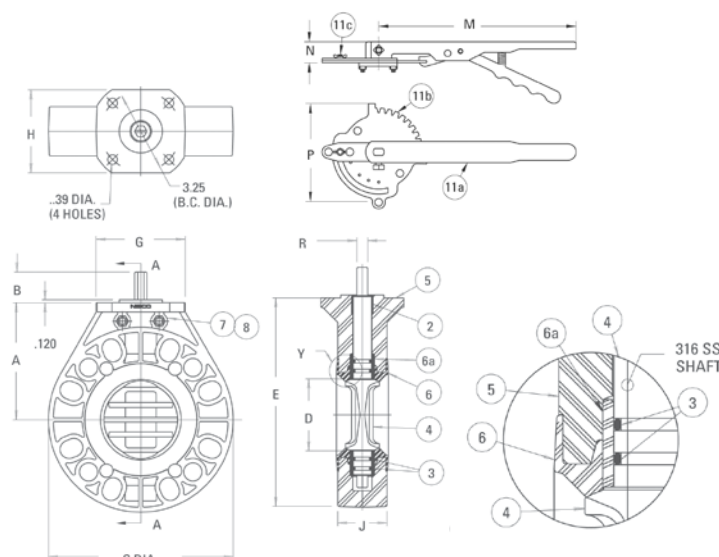

Chemtrol Figure Numbers

| Seat Material | Operating Mechanism | 3" (CPVC) ² Figure No. | 4" (PVC) Figure No. | 6" (PVC) Figure No. |
|------------------|--------------------------------|--------------------------------------|------------------------|------------------------|
| EPDM | No Operator | W51BF-E-N0 | W45BF-E-N0 | W45BF-E-N0 |
| | With Lever ¹ Handle | W51BF-E-LH | W45BF-E-LH | W45BF-E-LH |
| | With Gear Operator | NA | W45BF-E-G0 | W45BF-E-G0 |
| FKM ¹ | No Operator | W51BF-V-N0 | W45BF-V-N0 | W45BF-V-N0 |
| | With Lever ¹ Handle | W51BF-V-LH | W45BF-V-LH | W45BF-V-LH |
| | With Gear Operator | NA | W45BF-V-G0 | W45BF-V-G0 |

¹ Includes throttle plate and hardware.

² Body and disk/stem for 3" size are available in CPVC only.

Model-B Butterfly Valve Dimensions-Weights

| Valve Size | A | B | C | D | E | J | G | H | R | Handle | | P | Approx. ¹ Wt./Lbs. |
|------------|------|------|-------|------|-------|------|------|------|-----|--------|------|------|----------------------------------|
| | | | | | | | | | | M | N | | |
| 3 | 4.75 | 1.26 | 7.00 | 3.06 | 8.50 | 2.00 | 3.62 | 3.38 | .37 | 10.50 | 1.01 | 6.19 | 3.25 |
| 4 | 6.13 | 1.22 | 9.00 | 4.00 | 10.63 | 2.22 | 3.62 | 3.38 | .50 | 10.50 | 1.01 | 6.19 | 6.00 |
| 6 | 7.50 | 1.62 | 11.00 | 5.97 | 13.00 | 2.77 | 3.76 | 3.50 | .56 | 13.75 | 1.01 | 6.19 | 12.00 |

¹ Operator not included in weight.

Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC | CPVC | "Operating Temperature (F)" | PVC | CPVC |
|-----------------------------|-----|------|-----------------------------|------|------|
| 100 | 150 | 150 | 150 | N.R. | 100 |
| 110 | 135 | 140 | 160 | N.R. | 90 |
| 120 | 110 | 130 | 170 | N.R. | 80 |
| 130 | 75 | 120 | 180 | N.R. | 70 |
| 140 | 50 | 110 | 190 | N.R. | N.R. |

N.R. - Not recommended

PVC and CPVC True Union Ball Check, Foot, and Vent Valves

Chemtrol Figure Numbers

| Type Valve | End Conn | Elastomeric Trim | Materials | |
|------------------|----------|------------------|--|--|
| Ball Check Valve | | | PVC | CPVC |
| | Soc. | FKM EPDM | U45BC-V ¹ U45BC-E ¹ | U51BC-V ¹ U51BC-E ¹ |
| | Thd. | FKM EPDM | U45BC-V ¹ U45BC-E ¹ | U51BC-V ¹ U51BC-E ¹ |
| | Flgd. | FKM EPDM | F45BC-V F45BC-E | F51BC-V F51BC-E |

1 1/2"-2" PVC and CPVC TU ball check figures are supplied with universal connection components (i.e., a set of both socket and threaded end connectors). For 3" and 4" sizes of PVC and CPVC BC valves, replace U in the figure no. with S or T for socket or threaded units respectively.

Construction Materials

| Components ¹ | PVC | CPVC |
|--|--------------------------------|------|
| 1. Union Nut | PVC | CPVC |
| 2. End Connector | PVC | CPVC |
| 3. Ball – Standard for Check or Foot Valve – Floater Ball for Vent Valve ² | PVC Natural PP Floater Ball | CPVC |
| 4. Body ¹ | PVC | CPVC |
| 5. C.V. Seat-Carrier | PVC | CPVC |
| 6. O-ring ³ Body & Carrier; End Seal | FKM or EPDM | |
| 7. O-ring ³ Seat-Carrier, OD Seal | FKM or EPDM | |
| 8. O-ring ³ Seat Seal | FKM or EPDM | |
| 9. Plain End Pipe Nipple for Flanged Valve | PVC | CPVC |
| 10. Flange–Socket for Flanged Valve | PVC | CPVC |
| 11. Foot Valve Screen Housing Assembly ⁴ | PVC | CPVC |

1 All components except valve bodies are available as replacement parts.


2 Gravity ball check valves are converted to vent valves by replacing the standard ball with a floater ball and inverting the valve at installation—with seat up.

3 Each replacement O-ring kit contains all the O-rings required to refurbish any True Union Check or Ball Valve (regardless of model or style), or a minimum of two pipe unions.

4 Gravity ball check valves are converted to foot valves by replacing the union nut and end connector on the receiving end – seat end – of the body with an F.V. screen housing assembly.

Features

- Rated at 150 psi with non-shock service at 73°F.
- Gravity ball check may be converted for air or gas venting by replacement of standard ball with natural polypropylene floater ball. Then install valve upside down for fluid to lift ball into seat.
- For foot valve, replace inlet end connection with a foot valve screen housing assembly.
- Free oscillation of ball in guide ribs facilitates full port flow with minimum turbulence and chatter.
- Equally effective in checking back flows from head pressure on the discharge or suction sides of pump.

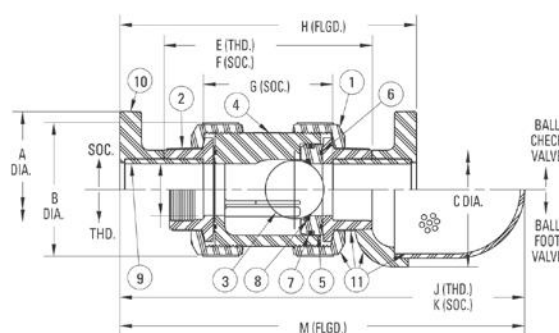

Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC | CPVC |
|-----------------------------|------|------|
| 100 | 150 | 150 |
| 110 | 135 | 140 |
| 120 | 110 | 130 |
| 130 | 75 | 120 |
| 140 | 50 | 110 |
| 150 | N.R. | 100 |
| 160 | N.R. | 90 |
| 170 | N.R. | 80 |
| 180 | N.R. | 70 |
| 190 | N.R. | 60 |
| 200 | N.R. | 50 |
| 250 | N.R. | N.R. |
| 280 | N.R. | N.R. |

N.R. - Not recommended

Dimensions¹–Weights³–Fluid Flow Coefficients

| Valve Size | Ball Check/Foot | | | | Ball Check Valve | | | | | Ball Foot Valve | | | | Seating Head Ft – H ₂ O | | Fluid Flow Coefficient C _v ³ |
|------------|-----------------|------|------|------|------------------|--------|--------|---------|-------------------------------|-----------------|--------|---------|-------------------------------|------------------------------------|--------|--|
| | A | B | C | D | E Thd. | F Soc. | G Soc. | H Flgd. | Approx. ² Wt. Lbs. | J Thd. | K Soc. | M Flgd. | Approx. ³ Wt. Lbs. | Vert. | Horiz. | |
| 1/2 | 3.50 | 1.98 | 2.63 | 0.50 | 3.94 | 4.13 | 2.36 | 6.27 | 0.42 | 6.13 | 6.19 | 7.25 | 0.23 | 6 | 7 | 5 |
| 3/4 | 3.88 | 2.44 | 2.63 | 0.75 | 4.65 | 5.02 | 3.00 | 7.38 | 0.72 | 6.88 | 7.13 | 8.25 | 0.29 | 6 | 7 | 10 |
| 1 | 4.26 | 2.83 | 3.63 | 1.00 | 5.08 | 5.40 | 3.12 | 7.99 | 1.05 | 8.13 | 8.25 | 9.63 | 0.37 | 4 | 5 | 19 |
| 1 1/4 | 4.62 | 4.08 | 5.50 | 1.25 | 6.38 | 6.75 | 4.22 | 9.65 | 2.46 | 11.13 | 11.25 | 12.75 | 1.34 | 4 | 5 | 37 |
| 1 1/2 | 5.00 | 4.08 | 5.50 | 1.50 | 6.38 | 6.99 | 4.21 | 10.18 | 2.62 | 11.13 | 11.50 | 13.13 | 1.34 | 4 | 5 | 56 |
| 2 | 6.00 | 5.23 | 5.50 | 2.00 | 7.36 | 8.02 | 4.99 | 11.45 | 4.76 | 11.75 | 12.13 | 13.75 | 1.88 | 4 | 5 | 101 |
| 3 | 7.50 | 7.17 | 5.50 | 3.00 | 9.98 | 9.98 | 6.17 | 14.22 | 9.21 | 13.38 | 13.38 | 15.63 | 3.00 | 3 | 4 | 251 |
| 4" | 9.00 | 7.17 | 5.50 | 3.00 | 20.76 | 20.76 | 16.20 | 16.14 | 14.18 | 18.50 | 18.50 | 16.25 | 3.00 | 3 | 4 | 251 |

1 Foot valve screen housing assemblies are available for the field conversion of PVC and CPVC TU ball check valves in sizes 1/2" - 4".

2 Weights shown for ball valve figures are PVC threaded models. For an approximation of CPVC check valve weights, the PVC weight may be multiplied by factor of 1.123. Weights shown for foot valves are actually those for PVC F.V. screen housing assemblies. So, the weight for a CPVC F.V. screen housing assy. may be found by multiplying the PVC weight by the 1.123 factor. These must be added to check valve weight for full foot valve weight.

3 C_v values are based on the basic valve laying length (G).

4 The 4" PVC and CPVC check valves are fabricated by solvent cementing either reducing flanges or reducing couplings onto the ends of a 3" valve with plain-end nipples.

WARNING: DO NOT USE OR TEST THE PRODUCTS IN THIS CATALOG WITH COMPRESSED AIR OR OTHER GASES. FAILURE TO FOLLOW THIS WARNING CAN RESULT IN PERSONAL INJURY OR DAMAGE TO PROPERTY.

Revision 1/2/2018

PVC Angle and Y-Pattern Globe Valves



Chemtrol Figure No.

T45AC-V



Chemtrol Figure No.

T45YP-V

Both styles available with threaded end connections only.



Features

- Rated at 150 psi with non-shock service at 73°F
- Y-pattern style has a minimal pressure-drop when compared with a conventional upright style globe valve
- Malleable glass reinforced PTFE seat disk ensures long-lasting positive sealing.
- Stub acme thread on stem provides rapid open-close operation.
- Liquid or slurry never touches stem threads.
- Can be used for both on-off and throttling control of fluid flow.
- Easy in-line maintenance.


Construction Materials

| Part | Material |
|--|------------------------------------|
| 1. Body – Angle – or Y-Pattern | PVC |
| 2. Bonnet | PVC |
| 3. Stem Assembly | PVC w/ Glass Filled PTFE Seat Disk |
| 4. Handle | PVC |
| 5. Snap Ring Retainer | Zinc Plated Steel |
| 6. O-Ring – Body Seal | FKM |
| 7. Energizer Back-Up Washer ¹ | PVC |
| 8. CV Stem Seal (2 required) ¹ | PTFE |
| 9. O-Ring – Stem Seal Energizer ¹ | FKM |


¹ Items not required for 1/4" valve.

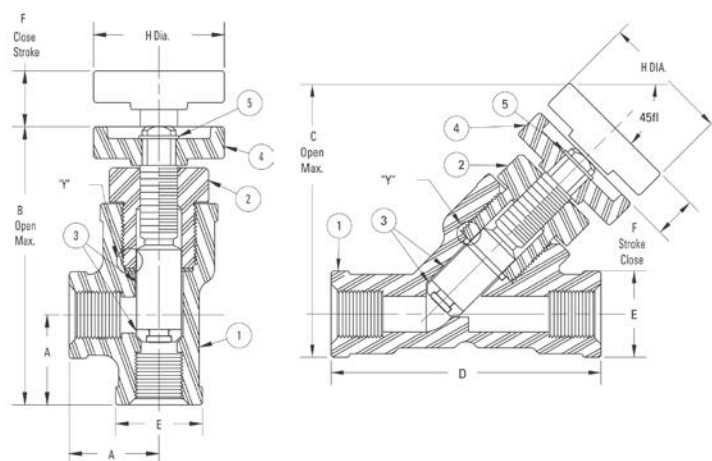

Detail "Y" Enlarged View
1/4" Size Valve



Detail "Y" Enlarged View
1/2" & 3/4" Size Valve



Detail "Y" Enlarged View
1" Size Valve

Valve Dimensions – Weights – Flow Coefficients

| Valve Size | Common Dimensions | | | Angle Valve ¹ | | Y-Pattern Valve ¹ | | | | | |
|------------|-------------------|----------------|---------------|--------------------------|-------------|--|---------------------|--------------|-------------|--|---------------------|
| | Hub Dia. E | Close Stroke F | Handle Dia. H | Center-To-Face A | Open Max. B | Flow Coef. C _v ² | Approx. Weight Lbs. | End-To-End D | Open Max. C | Flow Coef. C _v ² | Approx. Weight Lbs. |
| 1/4 | 0.88 | .44 | 1.32 | 0.88 | 3.56 | 1.1 | 0.11 | 2.75 | 2.75 | 3.1 | 0.12 |
| 1/2 | 1.25 | .75 | 2.19 | 1.31 | 5.38 | 5.4 | 0.28 | 3.50 | 4.63 | 17.7 | 0.30 |
| 3/4 | 1.50 | .94 | 2.19 | 1.41 | 6.50 | 9.9 | 0.47 | 4.25 | 5.56 | 32.5 | 0.53 |
| 1 | 1.75 | 1.19 | 2.19 | 1.88 | 7.88 | 15.8 | 0.69 | 5.00 | 6.31 | 49.3 | 0.73 |

¹ Available with threaded end connections only.

² C_v measured with valves completely open.

Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC |
|-----------------------------|------|
| 100 | 150 |
| 110 | 135 |
| 120 | 110 |
| 130 | 75 |
| 140 | 50 |
| 150 | N.R. |

N.R. - Not recommended

PVC Chemcock™ and Calibrated Needle Lab Valves





Chemtrol Figure No.

| | |
|---------|----------------------|
| A45CC-V | 1/4" Hose x 1/4" MPT |
| M45CC-V | 1/4" MPT x 1/4" MPT |

Features

- Rated at 150 psi with non-shock service at 73°F
- Its (4.8) calculated fluid flow coefficient (Cv) is based on the laying length being equivalent to 1/4" Schedule 80 pipe.
- Easily adaptable to any type of connection.
- Opens and closes with only a quarter turn.
- Replaceable FKM O-ring seats and seals.
- Corrosion-resistant all thermoplastic PVC construction.
- No sticking or galling.
- Full port design.



Approx. Weight 0.06 lbs.

Construction Materials

| Part | Material |
|------------------------------|----------------------|
| 1. Handle | PVC |
| 2. Ball/Stem | PVC |
| 3. Body End – Hose or Thread | PVC |
| 4. Body Half – Stem Side | PVC |
| 5. O-Ring – Body Seal | FKM |
| 6. O-Ring – Ball Seats (2) | FKM |
| 7. O-Ring – Stem Seal | FKM |
| 8. Handle Screw | Cadmium Plated Steel |





Chemtrol Figure No.

T45CN-V 1/4" FPT x 1/4" FPT

Features

- Rated at 150 psi with non-shock service at 73°F
- Precise flow measurement.
- Positive stop for safe operation.
- PTFE seat prevents wear on needle.
- Accurately adjust the flow by observing the knob handle exposing numerals molded on the valve body

| Knob Position | GPM @ Constant 50 PSI |
|---------------|-----------------------|
| 8 | .85 |
| 7 | 1.41 |
| 6 | 1.79 |
| 5 | 2.15 |
| 4 | 2.42 |
| 3 | 3.15 |
| 2 | 4.40 |
| 1 | 4.50 |

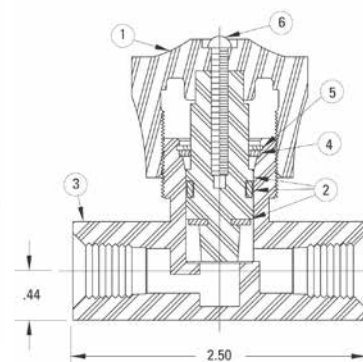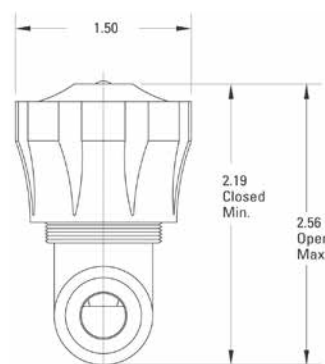

Approx. Weight 0.13 lbs.

Construction Materials

| Part | Material |
|--------------------|--------------------------------------|
| 1. Adjustment Knob | PVC |
| 2. Stem Assembly | PVC w/PTFE Seat Seal & FKM Stem Seal |
| 3. Body | PVC |
| 4. Retainer Washer | PVC |
| 5. Snap Ring | Stainless Steel |
| 6. Screw | Stainless Steel |

Maximum Operating Pressure (psi) vs. Temperature

| "Operating Temperature (F)" | PVC |
|-----------------------------|------|
| 100 | 150 |
| 110 | 135 |
| 120 | 110 |
| 130 | 75 |
| 140 | 50 |
| 150 | N.R. |

N.R. - Not recommended

Alternative Manual Operators

Part Numbers For Alternative Manual Operators

| Accessory | Use | Valve Size | | | | | | | | |
|-------------------------|------------------------|------------|----------|---------------|----------|-------|----------|----------|----------|---|
| | | 1/2 | 3/4 & 1 | 1 1/4 & 1 1/2 | 2 | 2 1/2 | 3 | 4 | 6 | 8 |
| 2" Sq. Nut Stem Adapter | PVC for TB Ball Valves | 21630007 | 21630009 | 21630011 | 21630012 | — | 21630014 | 21630016 | 21630016 | — |
| | PVC for HV Ball Valves | 21630007 | 21630009 | 21630011 | 21630011 | — | — | — | — | — |
| Round Safety Handle | PVC for TB Ball Valves | 81616007 | 81616009 | 81621011 | 81621012 | — | — | — | — | — |
| | PVC for HV Ball Valves | 81616007 | 81616009 | 81621011 | 81621011 | — | — | — | — | — |

2" Square Nut Stem Adapter—Permits operation of a valve with a standard utility (AWWA) wrench. The most common application is for valves located in an underground valve box. The square nut for ball valves is made from PVC. It snaps onto the stem and locks into the slot for turning-stops of a ball valve of any material, in place of its standard handle.



Round Safety Handle—Design prevents accidental operation of low-torque ball valve by snagging the lever handle with personal clothing or equipment. Suitable for PVC and CPVC Tru-Bloc® True Union Ball Valves, Model D.



Standoff Stem Extensions for Ball Valves—Provide handle clearance, with the integrity of turning-stops, for insulating, panel-mounting, or shallow submerged applications. These extensions are made of solid PVC, and are short; so top support is not required. Although priced in increments of 1" standoff, between handle and stem, they can be supplied in exact lengths if specified when ordered. And, if the extension is to be installed on a valve of material other than PVC or CPVC, that must also be specified when ordering.

PVC Standoff Stem Extensions For Ball Valve

| Length Of Ext. | Valve Size | | | | | |
|----------------|------------|----------|---------------|----------|----------|----------|
| | 1/2 | 3/4 & 1 | 1 1/4 & 1 1/2 | 2 | 3 | 4 & 6 |
| 1" Long | 21618007 | 21618009 | — | — | — | — |
| 2" Long | 21617150 | 21617175 | 21617214 | 21617226 | 21617069 | 21617076 |
| 3" Long | 21617151 | 21617177 | 21617216 | 21617229 | 21617249 | 21617078 |
| 4" Long | 21617153 | 21617179 | 21617218 | 21617231 | 21617251 | 21617257 |
| 6" Long | 21617157 | 21617183 | 21617222 | 21617235 | 21617252 | 21617260 |



Valve Lockout Devices

Part Numbers for Valve Lockout Devices

| Type Lockout Device | Location Mounted | Valve Size | | | | | | | | | | |
|--|------------------|------------|----------|----------|----------|----------|----------|-------|----------|----------|----------|---|
| | | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 | 6 | 8 |
| BV Handle and Locking Ring Kit | Field | 81644007 | 81644008 | 81644009 | 81644011 | 81644011 | 81644012 | — | — | — | — | — |
| PP Lockout Cover for Ball Valve | Field | 70060210 | 70060210 | 70060210 | 70060211 | 70060211 | 70060211 | — | 70060212 | — | — | — |
| Ball Valve-Mounted Lockout Kit W/ Std. Plastic Handle | Field | 70050007 | 70050008 | 70050009 | 70050011 | 70050011 | 70050012 | — | 70050014 | 70050016 | 70050016 | — |
| | Factory | 70050107 | 70050108 | 70050109 | 70050111 | 70050111 | 70050112 | — | 70050114 | 70050116 | 70050116 | — |
| Ball Valve-Mounted Lockout Kit W/ Lever Handle and Index Plate | Field | 70080007 | 70080008 | 70080009 | 70080011 | 70080011 | — | — | — | — | — | — |
| | Factory | 70080107 | 70080108 | 70080109 | 70080111 | 70080111 | — | — | — | — | — | — |

Meet OSHA Standard 29 CFR 1910.147; The Control of Hazardous Energy (Lockout/Tagout). The range in complexity and cost of these devices generally reflects the various usage requirements of frequency, permanency, and multiples of function. The gang hasp, for multi-discipline locking, is shown for the purpose of illustration only. It is not available with any of the devices.

TB Ball Valve Handle and Locking Ring Kit

The locking ring surrounds the valve body for permanent attachment to the valve. When the lock device is removed from the handle and retaining arm of the ring, the ring arm simply hangs beneath the valve. This single function kit is effective for valve-off lockout only or may be added to other Tru-Bloc® valves of any material.



Ball Valve Lockout Cover

This two-piece molded polypropylene split clamshell closure, which is hinged to fasten around the common handles of Tru-Bloc valves, is a simple provision for maintenance or operations lockout. The cover can be locked with the handle in the on, off, or any throttling position, but when the cover is locked the handle position, relating ball posture, is not visible. One of three cover sizes is usually transported to the point of use, because a cover is not easily attached to the valve when it is unlocked.




TB Ball Valve-Mounted Lockout Kit w/Standard Plastic Handle

This all-plastic kit, permanently mounted on a valve, may be locked in the on or off valve position. Whether locked or unlocked, the distinguishing handle position is clearly visible at all times, including throttling postures.



TB Ball Valve-Mounted Lockout Kit w/ Lever Handle and Index Plate

This kit consists of a lever-lock handle and index plate, adapted to fit a ball valve mount. It provides for locking the valve in the off position or any of the 9 increments of opening (10° each), including the full on position. The handle position, aligned with the fully on ball posture, is visible at all times.

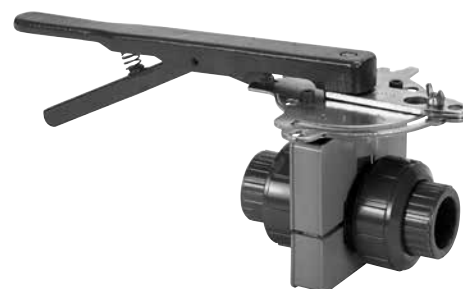

PVC Schedule 80

| | |
|-------------------------|----|
| Couplings | 24 |
| Adapters | 25 |
| Elbows | 26 |
| Tees | 27 |
| Plugs | 28 |
| Caps | 28 |
| Bushings | 29 |
| Class 150 Flanges | 30 |
| Unions | 32 |
| Metal Transition Unions | 33 |

Corzan® CPVC Schedule 80

| | |
|-------------------|----|
| Couplings | 34 |
| Adapters | 35 |
| Elbows | 35 |
| Tees | 36 |
| Plugs | 37 |
| Caps | 38 |
| Bushings | 38 |
| Class 150 Flanges | 40 |
| Unions | 42 |

Fitting Terms and Abbreviations Schedule 80 only

FPT Female Pipe Thread
CL Close
MPT Male Pipe Thread
S Female Socket
SH Short
SPG Male End (Spigot)

Dimensions and Standards

Universal Part No.

XX XX - XXX

(1) (2) (4)

Chemtrol Part No.

(Discontinued)

XX XXX XXX

(1) (2) (4)

Material and Product Type

| | (1) | (1) | (1) |
|-----------------------|-----------------------|----------------------|------------------------|
| Product Line | Universal Part Number | Chemtrol Part Number | Chemtrol Figure Number |
| PVC Sch. 80 | 8 | 01 | 45 |
| CPVC Sch. 80 | 18 | 05 | 51 |
| PP Black Sch. 80. | 28 | 07 | 61 |
| Chempure PP Sch. 80 | 78 | 10 | 62 |
| PVDF Red Sch. 80 | 38 | 58 | 65 |
| NPVDF Natural Sch. 80 | 48 | 06 | 66 |

Fitting Description

| | (2) | (2) | (2) | (3) |
|--------------------------|--------------------|-------------------|------------------|-----------------------------------|
| Fitting & End Connection | Universal Part No. | Chemtrol Part No. | Chemtrol Fitting | Chemtrol Figure No. Connection(s) |
| Tee-Socket | 01 | 013 | 00 | Blank |
| Tee-Socket x Thread | 02 | 015 | 12 | Blank |
| Tee-Thread | 05 | 014 | 12 | 3-3 |
| 90° ELL-Socket | 06 | 001 | 07 | Blank |
| 90° ELL-Socket x Thread | 07 | 003 | 07 | 3 |
| 90° ELL-Thread | 08 | 002 | 07 | 3-3 |
| 90° Street ELL-Male | 10 | 219 | 07 | 4 |
| Thread x Socket | | | | |
| 90° Street ELL-Male | 12 | 213 | 07 | 3-4 |
| Thread x Thread | | | | |
| 45° ELL-Socket | 17 | 007 | 06 | Blank |
| 45° ELL-Thread | 19 | 008 | 06 | 3-3 |
| Coupling-Socket | 29 | 025 | 01 | Blank |
| Coupling-Thread | 30 | 026 | 01 | 3-3 |
| Adapter Coupling-Socket | 35 | 027 | 03 | Blank |
| x Thread | | | | |
| Male Adapter-Male | 36 | 217 | 04 | Blank |
| Thread x Socket | | | | |
| Reducing Bushing-Socket | 37 | 049 | 18 | Blank |
| Reducing Bushing- | 38 | 051 | 18 | 3 |
| Spigot x Thread | | | | |
| Reducing Bushing-Thread | 39 | 050 | 18 | 3-4 |
| Cap-Socket | 47 | 031 | 17 | Blank |
| Cap-Thread | 48 | 032 | 17 | 3 |
| Plug-Spigot | 49 | 042 | 16 | Blank |
| Plug-Thread | 50 | 043 | 16 | 4 |
| Flange-Socket | 51 | 045 | 51 | Blank |
| Flange-Thread | 52 | 044 | 51 | 3 |
| Flange-Blind | 53 | 046 | 19 | Blank |
| Van Stone Flange-Socket | 54 | 069 | 51 | A |
| Union-Socket | 97 | 028 | 33 | Blank |
| Union-Thread | 98 | 029 | 33 | 3-3 |
| Nipple-Thread x Thread | 61 | 053 | 29 | Blank |

Chemtrol Figure

XX XX - X - X - SIZE


(1) (2) (3) (4)

| Size Description | (4) | (4) | (4) |
|------------------|-----------------------|----------------------|------------------------|
| | Universal Part Number | Chemtrol Part Number | Chemtrol Figure Number |
| Size | | | |
| 1/4 | 002 | 004 | ↑ |
| 1/2 | 005 | 007 | |
| 3/4 | 007 | 008 | |
| 1 | 010 | 009 | |
| 1 1/4 | 012 | 010 | |
| 1 1/2 | 015 | 011 | |
| 2 | 020 | 012 | |
| 2 1/2 | 025 | 013 | |
| 3 | 030 | 014 | |
| 4 | 040 | 016 | |
| 6 | 060 | 018 | |
| 8 | 080 | 019 | |
| 10 | 100 | 020 | |
| 12 | 120 | 021 | |
| 1/2 x 1/4 | 072 | 027 | |
| 3/4 x 1/4 | 098 | 029 | Simply State Size |
| 3/4 x 1/2 | 101 | 031 | |
| 1 x 1/4 | 128 | 032 | |
| 1 x 1/2 | 130 | 034 | |
| 1 x 3/4 | 131 | 035 | |
| 1 1/4 x 1/2 | 166 | 038 | |
| 1 1/4 x 3/4 | 167 | 039 | |
| 1 1/4 x 1 | 168 | 040 | |
| 1 1/2 x 1/2 | 209 | 043 | |
| 1 1/2 x 3/4 | 210 | 044 | |
| 1 1/2 x 1 | 211 | 045 | |
| 1 1/2 x 1 1/4 | 212 | 046 | |
| 2 x 1/2 | 247 | 049 | |
| 2 x 3/4 | 248 | 050 | |
| 2 x 1 | 249 | 051 | |
| 2 x 1 1/4 | 250 | 052 | ↓ |
| 2 x 1 1/2 | 251 | 053 | |
| 2 1/2 x 1/2 | 287 | 056 | |
| 2 1/2 x 3/4 | 288 | 057 | |
| 2 1/2 x 1 | 289 | 058 | |
| 2 1/2 x 1 1/4 | 290 | 059 | |
| 2 1/2 x 1 1/2 | 291 | 060 | |
| 2 1/2 x 2 | 292 | 061 | |
| 3 x 1 | 335 | 066 | |
| 3 x 1 1/4 | 336 | 067 | |
| 3 x 1 1/2 | 337 | 068 | |
| 3 x 2 | 338 | 069 | |
| 3 x 2 1/2 | 339 | 069 | |
| 4 x 2 | 420 | 076 | |
| 4 x 2 1/2 | 421 | 077 | |
| 4 x 3 | 422 | 078 | |
| 6 x 2 | 528 | 082 | |
| 6 x 3 | 530 | 084 | |
| 6 x 4 | 532 | 085 | |
| 8 x 6 | 585 | 088 | |

Couplings

Chemtrol
Fig. No.

4501 Socket Coupling (S x S)

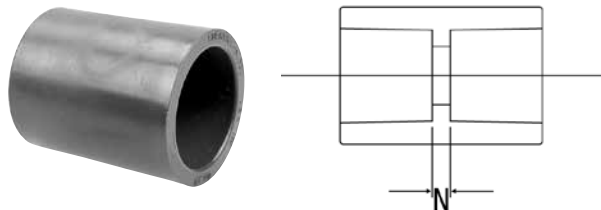

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. N |
|--------------|--------------------|------------------|--------|
| 1/4 | 829-002 | 0.05 | 0.12 |
| 1/2 | 829-005 | 0.09 | 0.25 |
| 3/4 | 829-007 | 0.13 | 0.25 |
| 1 | 829-010 | 0.14 | 0.25 |
| 1 1/4 | 829-012 | 0.22 | 0.25 |
| 1 1/2 | 829-015 | 0.29 | 0.25 |
| 2 | 829-020 | 0.42 | 0.25 |
| 2 1/2 | 829-025 | 0.68 | 0.20 |
| 3 | 829-030 | 1.05 | 0.19 |
| 4 | 829-040 | 1.83 | 0.19 |
| 6 | 829-060 | 3.56 | 0.25 |
| 8 | 829-080 | 8.69 | 0.25 |
| 10 | 829-100 | 13.88 | 0.38 |
| 12 | 829-120 | 22.69 | 0.50 |


4501-R Reducing Socket Coupling (S x S)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. N |
|---------------|--------------------|------------------|--------|
| 3/4 x 1/2 | 829-101 | 0.12 | 0.44 |
| 1 x 1/2 | 829-130 | 0.18 | 0.67 |
| 1 x 3/4 | 829-131 | 0.19 | 0.55 |
| 1 1/4 x 3/4 | 829-167 | 0.26 | 0.72 |
| 1 1/4 x 1 | 829-168 | 0.27 | 0.60 |
| 1 1/2 x 1/2 | 829-209 | 0.31 | 0.81 |
| 1 1/2 x 3/4 | 829-210 | 0.31 | 0.76 |
| 1 1/2 x 1 | 829-211 | 0.33 | 0.63 |
| 1 1/2 x 1 1/4 | 829-212 | 0.35 | 0.51 |
| 2 x 1 | 829-249 | 0.44 | 0.75 |
| 2 x 1 1/2 | 829-251 | 0.50 | 0.50 |
| 3 x 2 | 829-338 | 1.00 | 1.24 |
| 4 x 2 | 829-420 | 1.59 | 1.59 |
| 4 x 3 | 829-422 | 1.88 | 1.20 |

Other Reducing Couplings are produced by solvent cementing appropriate Reducer Bushings into Socket Couplings. They may be ordered as factory fabrications or may be assembled in the field.

Chemtrol
Fig. No.

4501-3-3 Thread Coupling (FPT x FPT)

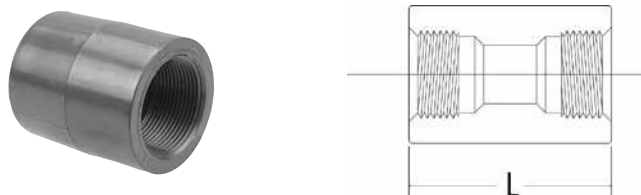

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|--------------|--------------------|------------------|--------|
| 1/4 | 830-002 | 0.06 | 1.41 |
| 1/2 | 830-005 | 0.09 | 2.03 |
| 3/4 | 830-007 | 0.14 | 2.28 |
| 1 | 830-010 | 0.23 | 2.53 |
| 1 1/4 | 830-012 | 0.33 | 2.78 |
| 1 1/2 | 830-015 | 0.41 | 3.03 |
| 2 | 830-020 | 0.60 | 3.28 |
| 2 1/2 | 830-025 | 0.86 | 3.76 |
| 3 | 830-030 | 1.22 | 4.00 |
| 4 | 830-040 | 2.13 | 4.75 |

4501-3-3-R Reducing Thread Coupling (FPT x FPT)


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|---------------|--------------------|------------------|--------|
| 3/4 x 1/2 | 830-101 | 0.14 | 2.34 |
| 1 x 1/2 | 830-130 | 0.20 | 2.70 |
| 1 x 3/4 | 830-131 | 0.18 | 2.70 |
| 1 1/4 x 3/4 | 830-167 | 0.29 | 3.00 |
| 1 1/4 x 1 | 830-168 | 0.31 | 3.00 |
| 1 1/2 x 3/4 | 830-210 | 0.35 | 3.16 |
| 1 1/2 x 1 | 830-211 | 0.38 | 3.16 |
| 1 1/2 x 1 1/4 | 830-212 | 0.40 | 3.16 |
| 2 x 1 | 830-249 | 0.50 | 3.40 |
| 2 x 1 1/2 | 830-251 | 0.56 | 3.40 |
| 3 x 2 | 830-338 | 1.15 | 4.66 |
| 4 x 2 | 830-420 | 1.79 | 5.38 |
| 4 x 3 | 830-422 | 2.11 | 5.38 |

Other Reducing Couplings are produced by solvent cementing appropriate Reducer Bushings into Thread Couplings. They may be ordered as factory fabrications or may be assembled in the field.

Adapters

Chemtrol
Fig. No.

4503 Female Adapter Coupling (S x FPT)

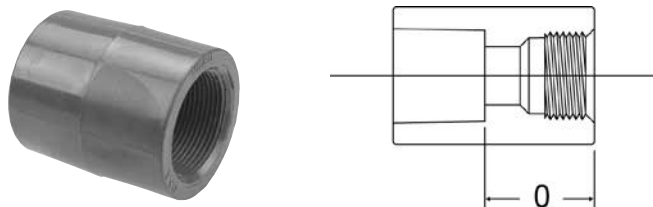

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. O |
|--------------|--------------------|------------------|--------|
| 1/4 | 835-002 | 0.04 | 0.77 |
| 1/2 | 835-005 | 0.09 | 1.14 |
| 3/4 | 835-007 | 0.14 | 1.27 |
| 1 | 835-010 | 0.21 | 1.39 |
| 1 1/4 | 835-012 | 0.30 | 1.52 |
| 1 1/2 | 835-015 | 0.38 | 1.64 |
| 2 | 835-020 | 0.56 | 1.77 |
| 2 1/2 | 835-025 | 0.77 | 1.98 |
| 3 | 835-030 | 1.15 | 2.10 |
| 4 | 835-040 | 1.95 | 2.47 |


4504 Male Adapter (S x MPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. OM |
|--------------|--------------------|------------------|---------|
| 1/2 | 836-005 | 0.04 | 0.94 |
| 3/4 | 836-007 | 0.06 | 0.97 |
| 1 | 836-010 | 0.10 | 1.15 |
| 1 1/4 | 836-012 | 0.14 | 1.12 |
| 1 1/2 | 836-015 | 0.19 | 1.12 |
| 2 | 836-020 | 0.27 | 1.20 |
| 2 1/2 | 836-025 | 0.50 | 1.89 |
| 3 | 836-030 | 0.79 | 1.99 |
| 4 | 836-040 | 1.30 | 2.09 |

Chemtrol
Fig. No.

4550 Tank Adapter (Tank x FPT)

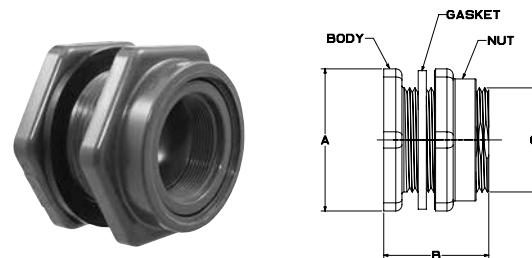

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. B | Dim. C |
|--------------|--------------------|------------------|--------|--------|--------|
| 1/2 | | 0.20 | 2.00 | 2.75 | 1.38 |
| 3/4 | Use | 0.35 | 2.38 | 2.88 | 1.63 |
| 1 | Figure | 0.40 | 2.56 | 2.88 | 1.88 |
| 1 1/4 | No. & | 0.55 | 3.25 | 3.00 | 2.63 |
| 1 1/2 | Nom. | 0.65 | 3.25 | 3.00 | 2.63 |
| 2 | Size | 1.15 | 4.38 | 3.25 | 3.25 |
| 3 | | 2.10 | 6.00 | 3.63 | 4.50 |


Note: Gasket is EPDM and nut is self-tightening left hand thread.

For complete technical information and more, refer to our website at www.chemtrol.com.

Elbows


Chemtrol
Fig. No.

4507 Socket 90° Elbow (S x S)

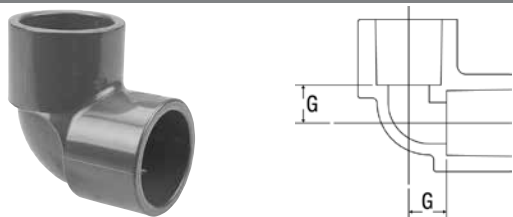

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G |
|--------------|--------------------|------------------|--------|
| 1/4 | 806-002 | 0.01 | 0.33 |
| 1/2 | 806-005 | 0.11 | 0.52 |
| 3/4 | 806-007 | 0.16 | 0.69 |
| 1 | 806-010 | 0.21 | 0.75 |
| 1 1/4 | 806-012 | 0.25 | 0.92 |
| 1 1/2 | 806-015 | 0.38 | 1.06 |
| 2 | 806-020 | 0.57 | 1.27 |
| 2 1/2 | 806-025 | 1.16 | 1.53 |
| 3 | 806-030 | 1.50 | 1.84 |
| 4 | 806-040 | 3.08 | 2.34 |
| 6 | 806-060 | 8.03 | 3.50 |
| 8 | 806-080 | 15.25 | 4.56 |
| 10 | 806-100 | 27.70 | 5.75 |
| 12 | 806-120 | 43.90 | 6.89 |

4507-3 Socket x Thread 90° Elbow (S x FPT)

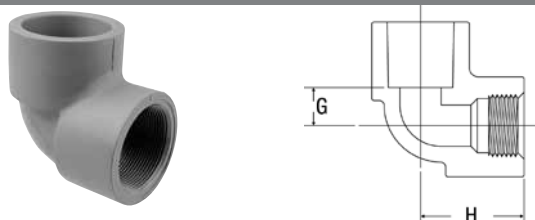


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. H |
|--------------|--------------------|------------------|--------|--------|
| 1/2 | 807-005 | 0.12 | 0.52 | 1.41 |
| 3/4 | 807-007 | 0.17 | 0.69 | 1.71 |
| 1 | 807-010 | 0.28 | 0.75 | 1.89 |
| 1 1/4 | 807-012 | 0.33 | 0.92 | 2.18 |
| 1 1/2 | 807-015 | 0.55 | 1.06 | 2.45 |
| 2 | 807-020 | 0.82 | 1.27 | 2.78 |

4507-12/4506-12 Flanged ELLs

Flanged fitting center-to-face dimensions may be found on page 32. When ordering, specify the figure number and the nominal size (e.g., 2" Schedule 80 PVC flanged 90° Elbow-4507-12 2")


Chemtrol
Fig. No.

4507-3-3 Thread 90° Elbow (FPT x FPT)

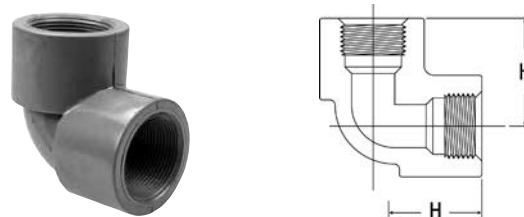

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. H |
|--------------|--------------------|------------------|--------|
| 1/4 | 808-002 | 0.04 | 0.97 |
| 1/2 | 808-005 | 0.12 | 1.41 |
| 3/4 | 808-007 | 0.18 | 1.71 |
| 1 | 808-010 | 0.28 | 1.89 |
| 1 1/4 | 808-012 | 0.42 | 2.18 |
| 1 1/2 | 808-015 | 0.55 | 2.45 |
| 2 | 808-020 | 0.82 | 2.78 |
| 2 1/2 | 808-025 | 1.25 | 3.31 |
| 3 | 808-030 | 1.90 | 3.74 |
| 4 | 808-040 | 3.62 | 4.62 |


4506 Socket 45° Elbow (S x S)

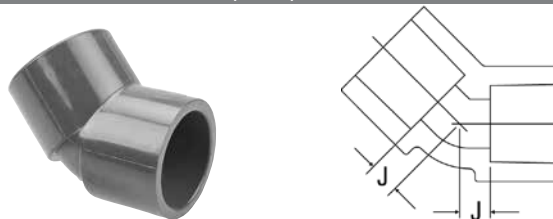

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. J |
|--------------|--------------------|------------------|--------|
| 1/4 | 817-002 | 0.03 | 0.18 |
| 1/2 | 817-005 | 0.04 | 0.26 |
| 3/4 | 817-007 | 0.14 | 0.33 |
| 1 | 817-010 | 0.15 | 0.37 |
| 1 1/4 | 817-012 | 0.24 | 0.43 |
| 1 1/2 | 817-015 | 0.31 | 0.47 |
| 2 | 817-020 | 0.48 | 0.61 |
| 2 1/2 | 817-025 | 0.93 | 0.68 |
| 3 | 817-030 | 1.23 | 0.78 |
| 4 | 817-040 | 2.46 | 1.02 |
| 6 | 817-060 | 6.21 | 1.75 |
| 8 | 817-080 | 13.03 | 2.22 |
| 10 | 817-100 | 19.70 | 2.61 |
| 12 | 817-120 | 32.70 | 3.08 |

Chemtrol
Fig. No.


4506-3-3 Thread 45° Elbow (FPT x FPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. K |
|--------------|--------------------|------------------|--------|
| 1/4 | 819-002 | 0.04 | 0.82 |
| 1/2 | 819-005 | 0.11 | 1.15 |
| 3/4 | 819-007 | 0.13 | 1.35 |
| 1 | 819-010 | 0.25 | 1.51 |
| 1 1/4 | 819-012 | 0.35 | 1.70 |
| 1 1/2 | 819-015 | 0.48 | 1.86 |
| 2 | 819-020 | 0.71 | 2.13 |
| 2 1/2 | 819-025 | 1.03 | 2.46 |
| 3 | 819-030 | 1.53 | 2.69 |
| 4 | 819-040 | 2.52 | 3.30 |

Tees

4511 Socket Tee (S x S x S)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. I |
|--------------|--------------------|------------------|--------|--------|--------|
| 1/4 | 801-002 | 0.05 | 0.33 | 0.33 | 0.33 |
| 1/2 | 801-005 | 0.11 | 0.52 | 0.52 | 0.52 |
| 3/4 | 801-007 | 0.17 | 0.69 | 0.69 | 0.69 |
| 1 | 801-810 | 0.25 | 0.75 | 0.75 | 0.75 |
| 1 1/4 | 801-012 | 0.48 | 0.92 | 0.92 | 0.92 |
| 1 1/2 | 801-015 | 0.52 | 1.06 | 1.06 | 1.06 |
| 2 | 801-020 | 0.97 | 1.27 | 1.27 | 1.27 |
| 2 1/2 | 801-025 | 1.50 | 1.53 | 1.53 | 1.53 |
| 3 | 801-030 | 2.00 | 1.84 | 1.84 | 1.84 |
| 4 | 801-040 | 3.54 | 2.34 | 2.34 | 2.34 |
| 6 | 801-060 | 10.47 | 3.50 | 3.50 | 3.50 |
| 8 | 801-080 | 20.57 | 4.56 | 4.56 | 4.56 |
| 10 | 801-100 | 35.40 | 5.75 | 5.75 | 5.75 |
| 12 | 801-120 | 58.40 | 6.89 | 6.89 | 6.89 |

Chemtrol
Fig. No.


4511-12 Flanged Tee

Flanged fitting center-to-face dimensions may be found on page 32. When ordering, specify the figure number and the nominal size (e.g., 2" Schedule 80 PVC flanged tee—4511-12 2")

4511-R Reducing Socket Tee (S x S x S)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. I |
|---------------------|--------------------|------------------|--------|--------|--------|
| 3/4 x 3/4 x 1/2 | 801-101 | 0.18 | 0.52 | 0.52 | 0.62 |
| 1 x 1 x 1/2 | 801-130 | 0.24 | 0.53 | 0.53 | 0.73 |
| 1 x 1 x 3/4 | 801-131 | 0.26 | 0.63 | 0.63 | 0.74 |
| 1 1/2 x 1 1/2 x 3/4 | 801-210 | 0.48 | 0.67 | 0.67 | 1.05 |
| 1 1/2 x 1 1/2 x 1 | 801-211 | 0.52 | 0.77 | 0.77 | 1.04 |
| 2 x 2 x 1/2 | 801-247 | 0.61 | 0.61 | 0.61 | 1.30 |
| 2 x 2 x 3/4 | 801-248 | 0.65 | 0.71 | 0.71 | 1.30 |
| 2 x 2 x 1 | 801-249 | 0.69 | 0.81 | 0.81 | 1.30 |
| 2 x 2 x 1 1/2 | 801-251 | 0.83 | 1.08 | 1.08 | 1.30 |
| 3 x 3 x 2 | 801-338 | 1.73 | 1.37 | 1.37 | 1.86 |
| 4 x 4 x 2 | 801-420 | 2.79 | 1.42 | 1.42 | 2.36 |
| 4 x 4 x 3 | 801-422 | 3.33 | 1.90 | 1.90 | 2.38 |
| 6 x 6 x 4 | 801-532 | 7.29 | 2.60 | 2.60 | 3.56 |

4512 Socket x Thread Tee (S x S x FPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. H |
|--------------|--------------------|------------------|--------|--------|--------|
| 1/2 | 802-005 | 0.16 | 0.52 | 0.52 | 1.41 |
| 3/4 | 802-007 | 0.24 | 0.69 | 0.69 | 1.71 |
| 1 | 802-010 | 0.34 | 0.75 | 0.75 | 1.89 |
| 1 1/4 | 802-012 | 0.57 | 0.92 | 0.92 | 2.18 |
| 1 1/2 | 802-015 | 0.80 | 1.06 | 1.06 | 2.45 |
| 2 | 802-020 | 1.13 | 1.27 | 1.27 | 2.78 |

*For questions concerning thermoplastic piping systems, please call or fax: **888.446.4226 (ph)**, **888.336.4226 (fx)**.*

Chemtrol
Fig. No.


4512-3-3 Threaded Tee (FPT x FPT x FPT)

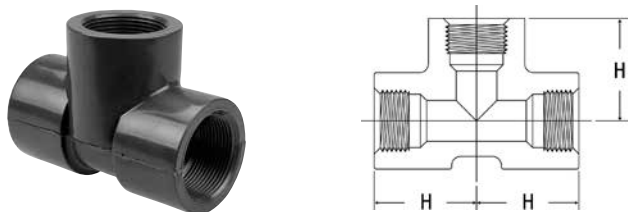

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. H |
|--------------|--------------------|------------------|--------|
| 1/4 | 805-002 | 0.05 | 0.97 |
| 1/2 | 805-005 | 0.16 | 1.41 |
| 3/4 | 805-007 | 0.26 | 1.71 |
| 1 | 805-010 | 0.35 | 1.89 |
| 1 1/4 | 805-012 | 0.57 | 2.18 |
| 1 1/2 | 805-015 | 0.75 | 2.45 |
| 2 | 805-020 | 1.13 | 2.78 |
| 2 1/2 | 805-025 | 1.79 | 3.31 |
| 3 | 805-030 | 2.60 | 3.74 |
| 4 | 805-040 | 4.63 | 4.62 |

Plugs

4516-4 Thread Plug (MPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|--------------|--------------------|------------------|--------|
| 1/4 | 850-002 | 0.01 | 0.85 |
| 1/2 | 850-005 | 0.03 | 1.04 |
| 3/4 | 850-007 | 0.03 | 1.10 |
| 1 | 850-010 | 0.06 | 1.25 |
| 1 1/4 | 850-012 | 0.10 | 1.66 |
| 1 1/2 | 850-015 | 0.14 | 1.78 |
| 2 | 850-020 | 0.19 | 1.92 |
| 2 1/2 | 850-025 | 0.29 | 2.18 |
| 3 | 850-030 | 0.51 | 2.42 |
| 4 | 850-040 | 0.95 | 2.81 |

1/4" Plug is solid, only

Caps

Chemtrol
Fig. No.


4517 Socket Cap* (S)

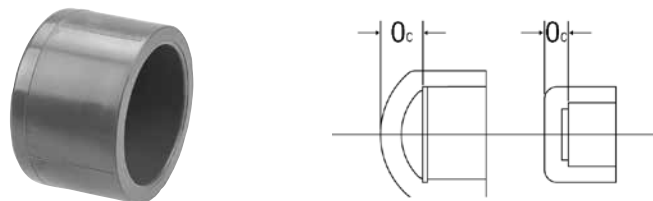

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. Oc |
|--------------|--------------------|------------------|---------|
| 1/4 | 847-002 | 0.03 | 0.25 |
| 1/2 | 847-005 | 0.06 | 0.39 |
| 3/4 | 847-007 | 0.08 | 0.37 |
| 1 | 847-010 | 0.14 | 0.41 |
| 1 1/4 | 847-012 | 0.20 | 0.40 |
| 1 1/2 | 847-015 | 0.26 | 0.41 |
| 2 | 847-020 | 0.38 | 0.42 |
| 2 1/2 | 847-025 | 0.57 | 0.57 |
| 3 | 847-030 | 0.87 | 1.29 |
| 4 | 847-040 | 1.53 | 1.58 |
| 6 | 847-060 | 3.77 | 2.13 |

*Sizes 2" and smaller are flat; 2 1/2" and larger are domed.

4517-3 Thread Cap* (FPT)

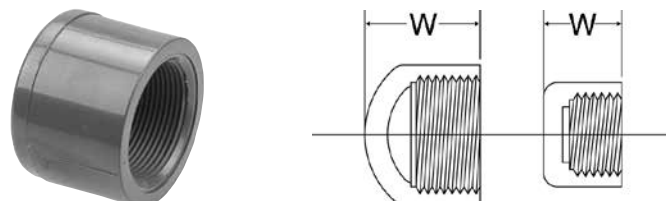


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. W |
|--------------|--------------------|------------------|--------|
| 1/4 | 848-002 | 0.01 | 0.89 |
| 1/2 | 848-005 | 0.06 | 1.28 |
| 3/4 | 848-007 | 0.10 | 1.38 |
| 1 | 848-010 | 0.15 | 1.55 |
| 1 1/4 | 848-012 | 0.22 | 1.66 |
| 1 1/2 | 848-015 | 0.29 | 1.80 |
| 2 | 848-020 | 0.41 | 1.93 |
| 2 1/2 | 848-025 | 0.64 | 2.35 |
| 3 | 848-030 | 0.93 | 3.19 |
| 4 | 848-040 | 1.73 | 3.86 |

*Sizes 2" and smaller are flat; 2 1/2" and larger are domed.


Bushings

Design Styles

The design style of most bushings is to have a solid wall between the inside and outside connections. Some of the multistep reductions with exceedingly thick cross-sections are not solid. This design style achieves structural support with a web of ribs attaching the inner and outer connection walls, with the open area toward the exterior bushing face. The styles are denoted by W and S for webbed and solid designs respectively.




Webbed design



Solid design

Chemtrol
Fig. No.

4518 Flush Socket Reducer Bushing (SPG x S)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. N _N |
|---------------|--------------------|------------------|--------------|---------------------|---------------------|
| 1/2 x 1/4 | 837-072 | 0.03 | S | 1.17 | 0.53 |
| 3/4 x 1/2 | 837-101 | 0.05 | S | 1.15 | 0.26 |
| 1 x 1/2 | 837-130 | 0.06 | S | 1.28 | 0.39 |
| 1 x 3/4 | 837-131 | 0.05 | S | 1.28 | 0.27 |
| 1 1/4 x 1/2 | 837-166 | 0.10 | S | 1.41 | 0.52 |
| 1 1/4 x 3/4 | 837-167 | 0.10 | S | 1.41 | 0.40 |
| 1 1/4 x 1 | 837-168 | 0.06 | S | 1.41 | 0.27 |
| 1 1/2 x 1/2 | 837-209 | 0.12 | W | 1.53 | 0.64 |
| 1 1/2 x 3/4 | 837-210 | 0.10 | S | 1.53 | 0.52 |
| 1 1/2 x 1 | 837-211 | 0.08 | S | 1.53 | 0.39 |
| 1 1/2 x 1 1/4 | 837-212 | 0.06 | S | 1.53 | 0.27 |
| 2 x 1/2 | 837-247 | 0.20 | W | 1.66 | 0.77 |
| 2 x 3/4 | 837-248 | 0.20 | W | 1.66 | 0.65 |
| 2 x 1 | 837-249 | 0.20 | W | 1.66 | 0.52 |
| 2 x 1 1/4 | 837-250 | 0.19 | S | 1.66 | 0.40 |
| 2 x 1 1/2 | 837-251 | 0.15 | S | 1.66 | 0.27 |
| 2 1/2 x 1 | 837-289 | 0.31 | W | 1.94 | 0.80 |
| 2 1/2 x 1 1/4 | 837-290 | 0.31 | W | 1.94 | 0.68 |
| 2 1/2 x 1 1/2 | 837-291 | 0.27 | S | 1.94 | 0.55 |
| 2 1/2 x 2 | 837-292 | 0.24 | S | 1.94 | 0.43 |
| 3 x 1 | 837-335 | 0.65 | W | 2.42 | 1.28 |
| 3 x 1 1/2 | 837-337 | 0.67 | W | 2.42 | 1.03 |
| 3 x 2 | 837-338 | 0.64 | S | 2.42 | 0.91 |
| 3 x 2 1/2 | 837-339 | 0.48 | S | 2.42 | 0.64 |


Chemtrol
Fig. No.

4518 Flush Socket Reducer Bushing (SPG x S) (cont.)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. N _N |
|--------------|--------------------|------------------|--------------|---------------------|---------------------|
| 4 x 2 | 837-420 | 1.14 | W | 2.81 | 1.30 |
| 4 x 2 1/2 | 837-421 | 1.14 | S | 2.81 | 1.03 |
| 4 x 3 | 837-422 | 0.93 | S | 2.81 | 0.91 |
| 6 x 2 | 837-528 | 3.28 | W | 3.06 | 1.55 |
| 6 x 4 | 837-532 | 2.68 | S | 3.06 | 0.78 |
| 8 x 6 | 837-585 | 5.46 | S | 4.59 | 1.56 |
| 10 x 6 | 837-626 | 10.68 | W | 5.59 | 2.56 |
| 10 x 8 | 837-628 | 9.36 | S | 5.59 | 1.09 |
| 12 x 8 | 837-668 | 16.73 | W | 6.59 | 2.09 |
| 12 x 10 | 837-670 | 12.77 | S | 6.59 | 1.09 |

Other Reducing Couplings are produced by solvent cementing appropriate Reducer Bushings into Socket Couplings. They may be ordered as factory fabrications or may be assembled in the field.

4518-3 Flush Spigot x Thread Reducer Bushing (SPG x FPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. Y* |
|---------------|--------------------|------------------|--------------|---------------------|---------|
| 1/2 x 1/4 | 838-072 | 0.03 | S | 1.17 | 0.31 |
| 3/4 x 1/4 | 838-098 | 0.04 | S | 1.29 | 0.31 |
| 3/4 x 1/2 | 838-101 | 0.03 | S | 1.29 | 0.43 |
| 1 x 1/2 | 838-130 | 0.07 | S | 1.56 | 0.43 |
| 1 x 3/4 | 838-131 | 0.05 | S | 1.56 | 0.45 |
| 1 1/4 x 1/2 | 838-166 | 0.14 | S | 1.66 | 0.43 |
| 1 1/4 x 3/4 | 838-167 | 0.12 | S | 1.66 | 0.45 |
| 1 1/4 x 1 | 838-168 | 0.10 | S | 1.66 | 0.53 |
| 1 1/2 x 1/2 | 838-209 | 0.21 | S | 1.78 | 0.43 |
| 1 1/2 x 3/4 | 838-210 | 0.19 | S | 1.78 | 0.45 |
| 1 1/2 x 1 | 838-211 | 0.17 | S | 1.78 | 0.53 |
| 1 1/2 x 1 1/4 | 838-212 | 0.18 | S | 1.78 | 0.55 |
| 2 x 1/2 | 838-247 | 0.34 | S | 1.92 | 0.43 |
| 2 x 3/4 | 838-248 | 0.32 | S | 1.92 | 0.45 |
| 2 x 1 | 838-249 | 0.29 | S | 1.92 | 0.53 |
| 2 x 1 1/4 | 838-250 | 0.24 | S | 1.92 | 0.55 |
| 2 x 1 1/2 | 838-251 | 0.20 | S | 1.92 | 0.55 |
| 2 1/2 x 2 | 838-292 | 0.25 | S | 2.18 | 0.57 |
| 3 x 1 | 838-335 | 0.65 | S | 2.42 | 0.53 |
| 3 x 1 1/2 | 838-337 | 0.70 | S | 2.42 | 0.55 |
| 3 x 2 | 838-338 | 0.67 | S | 2.42 | 0.57 |
| 3 x 2 1/2 | 838-339 | 0.52 | S | 2.42 | 0.87 |
| 4 x 2 | 838-420 | 1.17 | S | 2.81 | 0.57 |
| 4 x 3 | 838-422 | 1.01 | S | 2.81 | 0.95 |

Other size reductions are produced by solvent cementing appropriate Reducer Bushings together. They may be ordered as factory fabrications or may be assembled in the field.

*Typical male component engagement, hand tight (L₁ in ASME B1.20.1 thread spec.) plus 1 1/2 turns.

Chemtrol
Fig. No.

4518-3-4 Flush Thread Reducer Bushing (MPT x FPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L1 | Dim. Y* |
|---------------|--------------------|------------------|--------------|---------|---------|
| 1/2 x 1/4 | 839-072 | 0.02 | S | 0.93 | 0.25 |
| 3/4 x 1/4 | 839-098 | 0.03 | S | 0.95 | 0.25 |
| 3/4 x 1/2 | 839-101 | 0.02 | S | 0.95 | 0.25 |
| 1 x 1/2 | 839-130 | 0.05 | S | 1.24 | 0.38 |
| 1 x 3/4 | 839-131 | 0.03 | S | 1.24 | 0.38 |
| 1 1/4 x 1/2 | 839-166 | 0.10 | S | 1.27 | 0.38 |
| 1 1/4 x 3/4 | 839-167 | 0.09 | S | 1.27 | 0.38 |
| 1 1/4 x 1 | 839-168 | 0.07 | S | 1.27 | 0.38 |
| 1 1/2 x 1/2 | 839-209 | 0.20 | S | 1.28 | 0.38 |
| 1 1/2 x 3/4 | 839-210 | 0.14 | S | 1.28 | 0.38 |
| 1 1/2 x 1 | 839-211 | 0.12 | S | 1.28 | 0.38 |
| 1 1/2 x 1 1/4 | 839-212 | 0.08 | S | 1.28 | 0.38 |
| 2 x 1/2 | 839-247 | 0.32 | S | 1.32 | 0.38 |
| 2 x 3/4 | 839-248 | 0.30 | S | 1.32 | 0.38 |
| 2 x 1 | 839-249 | 0.28 | S | 1.32 | 0.38 |
| 2 x 1 1/4 | 839-250 | 0.22 | S | 1.32 | 0.38 |
| 2 x 1 1/2 | 839-251 | 0.18 | S | 1.32 | 0.38 |
| 2 1/2 x 2 | 839-292 | 0.21 | S | 2.18 | 0.57 |
| 3 x 1 1/2 | 839-337 | 0.58 | S | 2.42 | 0.55 |
| 3 x 2 | 839-338 | 0.56 | S | 2.42 | 0.57 |
| 3 x 2 1/2 | 839-339 | 0.45 | S | 2.42 | 0.87 |
| 4 x 2 | 839-420 | 1.09 | S | 2.81 | 0.57 |
| 4 x 3 | 839-422 | 0.81 | S | 2.81 | 0.95 |

Other size reductions are produced by solvent cementing appropriate Reducer Bushings together. They may be ordered as factory fabrications or may be assembled in the field.


*Typical male component engagement, hand tight (L₁ in ASME B1.20.1 thread spec.) plus 1 1/2 turns.

Class 150 Flanges

For flange dimensions that comply with ANSI B16.5, 150 lb., steel flanges, see Reference Data on following pages.



Chemtrol
Fig. No.

4551-H Socket Flange (S), One-Piece (Solid)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. N |
|--------------|--------------------|------------------|--------|--------|
| 1/2 | 851-H05 | 0.21 | 0.54 | 0.20 |
| 3/4 | 851-H07 | 0.31 | 0.61 | 0.17 |
| 1 | 851-H10 | 0.41 | 0.68 | 0.18 |
| 1 1/4 | 851-H12 | 0.53 | 0.73 | 0.20 |
| 1 1/2 | 851-H15 | 0.68 | 0.82 | 0.23 |
| 2 | 851-H20 | 0.96 | 0.92 | 0.27 |
| 2 1/2 | 851-H25 | 1.61 | 1.02 | 0.20 |
| 3 | 851-H30 | 2.16 | 1.13 | 0.29 |
| 4 | 851-H40 | 2.98 | 1.24 | 0.32 |
| 6 | 851-H60 | 4.44 | 1.36 | 0.31 |
| 8 | 851-H80 | 9.12 | 1.50 | 0.35 |


4551-H-3 Thread Flange (FPT), One-Piece (Solid)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. Of |
|--------------|--------------------|------------------|--------|---------|
| 1/2 | 852-H05 | 0.21 | 0.54 | 0.88 |
| 3/4 | 852-H07 | 0.30 | 0.61 | 0.91 |
| 1 | 852-H10 | 0.40 | 0.68 | 1.08 |
| 1 1/4 | 852-H12 | 0.50 | 0.73 | 1.11 |
| 1 1/2 | 852-H15 | 0.65 | 0.82 | 1.12 |
| 2 | 852-H20 | 0.90 | 0.92 | 1.18 |
| 2 1/2 | 852-H25 | 1.50 | 1.02 | 1.42 |
| 3 | 852-H30 | 1.93 | 1.13 | 1.55 |
| 4 | 852-H40 | 2.80 | 1.24 | 1.67 |


Chemtrol
Fig. No.

4519-H Blind Flange, One-Piece (Solid)

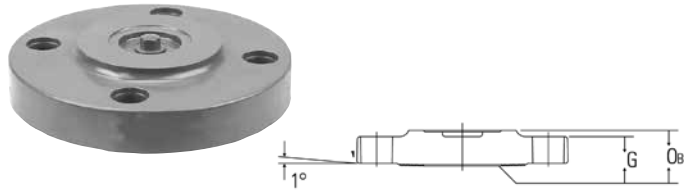

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O _B |
|--------------|--------------------|------------------|--------|---------------------|
| 1/2 | 853-H05 | 0.21 | 0.54 | 0.76 |
| 3/4 | 853-H07 | 0.32 | 0.61 | 0.83 |
| 1 | 853-H10 | 0.43 | 0.68 | 0.88 |
| 1 1/4 | 853-H12 | 0.57 | 0.73 | 0.95 |
| 1 1/2 | 853-H15 | 0.69 | 0.82 | 1.04 |
| 2 | 853-H20 | 1.08 | 0.92 | 1.13 |
| 2 1/2 | 853-H25 | 1.81 | 1.02 | 1.22 |
| 3 | 853-H30 | 2.45 | 1.13 | 1.39 |
| 4 | 853-H40 | 3.56 | 1.24 | 1.51 |
| 6 | 853-H60 | 5.97 | 1.36 | 1.60 |
| 8 | 853-H80 | 10.96 | 1.50 | 1.78 |


4551-W Socket Flange (S), One-Piece (Webbed Design)

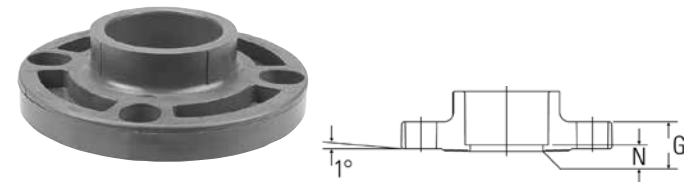

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. N |
|--------------|--------------------|------------------|--------|--------|
| 2 | 851-020 | 0.79 | 0.92 | 0.27 |
| 3 | 851-030 | 1.52 | 1.13 | 0.29 |
| 4 | 851-040 | 2.25 | 1.24 | 0.32 |
| 6 | 851-060 | 4.24 | 1.36 | 0.31 |

Note: One-piece webbed flanges have oblong bolt holes which permit mating with ANSI B16.5, 150 lb.; BS 1560, class 150; ISO 2084, PN10; and DIN EN 1092, PN10 flanges.


4551-W-3 Thread Flange (FPT), One-Piece (Webbed Design)

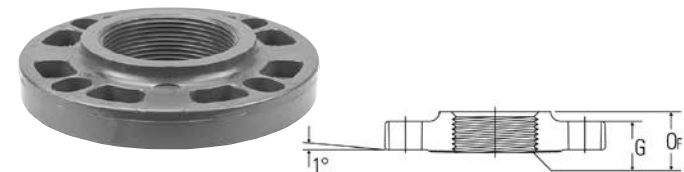

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O _F |
|--------------|--------------------|------------------|--------|---------------------|
| 2 | 852-020 | 0.78 | 0.92 | 1.18 |
| 3 | 852-030 | 1.26 | 1.13 | 1.55 |
| 4 | 852-040 | 2.03 | 1.24 | 1.67 |

Chemtrol
Fig. No.


4519-W Blind Flange, One-Piece (Webbed Design)

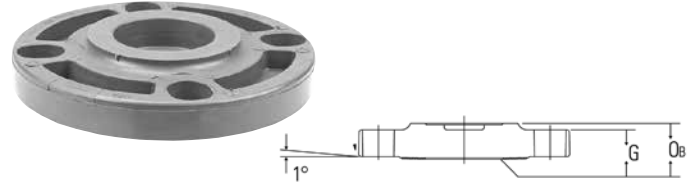

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O _B |
|--------------|--------------------|------------------|--------|---------------------|
| 2 | 853-020 | 1.16 | 0.92 | 1.13 |
| 3 | 853-030 | 1.41 | 1.13 | 1.39 |
| 4 | 853-040 | 2.56 | 1.24 | 1.51 |
| 6 | 853-060 | 4.96 | 1.36 | 1.60 |

Note: One-piece webbed flanges have oblong bolt holes which permit mating with ANSI B16.5, 150 lb.; BS 1560, class 150; ISO 2084, PN10; and DIN EN 1092, PN10 flanges.

4551-A Socket Flange (S), Van Stone

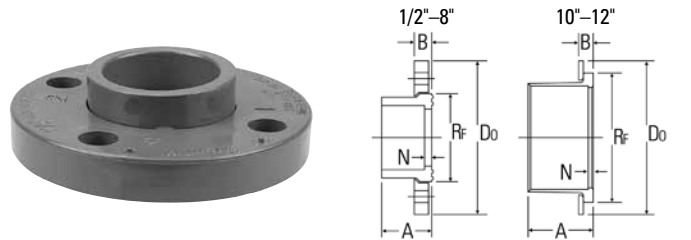

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. B | Dim. D ₀ | Dim. R _f | Dim. N |
|--------------|--------------------|------------------|--------|--------|---------------------|---------------------|--------|
| 1/2 | 854-005 | 0.19 | 1.00 | .50 | 3.50 | 1.48 | 0.11 |
| 3/4 | 854-007 | 0.24 | 1.13 | .50 | 3.88 | 1.75 | 0.11 |
| 1 | 854-010 | 0.38 | 1.25 | .56 | 4.25 | 2.04 | 0.11 |
| 1 1/4 | 854-012 | 0.40 | 1.38 | .63 | 4.63 | 2.50 | 0.11 |
| 1 1/2 | 854-015 | 0.54 | 1.50 | .69 | 5.00 | 2.78 | 0.11 |
| 2 | 854-020 | 0.92 | 1.63 | .75 | 6.00 | 3.41 | 0.11 |
| 2 1/2 | 854-025 | 1.37 | 1.94 | .94 | 7.00 | 4.11 | 0.16 |
| 3 | 854-030 | 1.75 | 2.40 | 1.05 | 7.50 | 4.81 | 0.50 |
| 4 | 854-040 | 2.83 | 2.76 | 1.16 | 8.98 | 6.19 | 0.48 |
| 6 | 854-060 | 4.19 | 3.56 | 1.29 | 11.00 | 7.97 | 0.53 |
| 8 | 854-080 | 6.47 | 5.01 | 1.42 | 13.50 | 10.45 | 0.51 |
| 10* | 854-100 | 10.20 | 5.83 | 1.31 | 16.00 | 13.29 | 0.33 |
| 12* | 854-120 | 17.53 | 7.45 | 1.70 | 19.00 | 16.00 | 0.45 |

*Aluminum ring with PVC coating.

Van Stone Flange Assembly List

| Item | Description | Material |
|------|---------------|---------------------|
| 1 | Connector Hub | PVC |
| 2 | Flange Ring | PVC Coated Aluminum |
| 3 | Flange Ring | PVC |

Chemtrol
Fig. No.




NR 51 Flange Gaskets, for Class 150 Flanges



Note: These gaskets are 1/8" thick, full face polychloroprene (CR), 70 durometer.

| Nominal Size | Part No. | Approx. Lbs./Ea. |
|--------------|----------------------------|------------------|
| 1/2 | Use Figure No. & Nom. Size | 0.11 |
| 3/4 | | 0.12 |
| 1 | | 0.13 |
| 1 1/4 | | 0.14 |
| 1 1/2 | | 0.15 |
| 2 | | 0.20 |
| 2 1/2 | | 0.25 |
| 3 | | 0.28 |
| 4 | | 0.30 |
| 6 | | 0.40 |
| 8 | | 0.50 |
| 10 | | 0.55 |
| 12 | | 0.60 |

Flanged Fittings*– Fabricated from Molded Components




| Nominal Size | Fig. No. 4511-12 Flanged Tee | | Fig. No. 4507-12 Flanged 90° ELL | | Fig. No. 4506-12 Flanged 45° ELL | |
|--------------|---------------------------------|----------|-------------------------------------|----------|-------------------------------------|---------|
| | Approx. Lbs./Ea. | Dim. A | Approx. Lbs./Ea. | Dim. A | Approx. Lbs./Ea. | Dim. B |
| 1 | 1.71 | 3 3/32 | 1.19 | 3 3/32 | 1.12 | 2 23/32 |
| 1 1/4 | 2.39 | 3 19/32 | 1.60 | 3 19/32 | 1.60 | 3 3/32 |
| 1 1/2 | 3.24 | 3 31/32 | 2.06 | 3 31/32 | 2.09 | 3 13/32 |
| 2 | 4.86 | 4 15/32 | 3.28 | 4 15/32 | 3.16 | 3 27/32 |
| 2 1/2 | 7.82 | 5 7/32 | 5.30 | 5 7/32 | 5.08 | 4 13/32 |
| 3 | 10.67 | 5 13/32 | 7.32 | 5 13/32 | 6.92 | 4 25/32 |
| 4 | 16.64 | 7 3/32 | 11.60 | 7 3/32 | 10.79 | 5 25/32 |
| 6 | 32.74 | 9 25/32 | 22.65 | 9 25/32 | 20.84 | 8 1/2 |
| 8 | 65.79 | 13 31/32 | 45.40 | 13 31/32 | 42.50 | 11 5/8 |

*Flanged fittings are produced by solvent cementing socket flanges to socket fittings with short plain end pipe nipples. They may be ordered as factory fabrications or may be assembled in the field.

Unions

4533 FKM/4533E (EPDM) Socket Union (S x S)




| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. S* |
|--------------|--------------|---------------|------------------|--------|--------|---------|
| 1/4 | 857-002 | 897-002 | 0.07 | 1.70 | 0.40 | 0.64 |
| 1/2 | 857-005 | 897-005 | 0.16 | 2.00 | 0.43 | 0.89 |
| 3/4 | 857-007 | 897-007 | 0.27 | 2.44 | 0.45 | 1.01 |
| 1 | 857-010 | 897-010 | 0.40 | 2.83 | 0.43 | 1.14 |
| 1 1/4 | 857-012 | 897-012 | 0.87 | 4.08 | 0.79 | 1.26 |
| 1 1/2 | 857-015 | 897-015 | 0.93 | 4.08 | 0.80 | 1.39 |
| 2 | 857-020 | 897-020 | 1.83 | 5.26 | 0.80 | 1.51 |
| 3 | 857-030 | 897-030 | 3.76 | 7.17 | 0.90 | 1.90 |

The 2 1/2" Socket Union is available as a fabrication from the 3" size Bushed down.

* Socket Depth

Chemtrol
Fig. No.

4533-3-3 FKM / 4533E-3-3 (EPDM) Threaded Union (FPT x FPT)




| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. T* |
|--------------|--------------|---------------|------------------|--------|--------|---------|
| 1/4 | 858-002 | 898-002 | 0.11 | 1.70 | 1.07 | 0.31 |
| 1/2 | 858-005 | 898-005 | 0.16 | 2.00 | 1.30 | 0.43 |
| 3/4 | 858-007 | 898-007 | 0.28 | 2.44 | 1.38 | 0.45 |
| 1 | 858-010 | 898-010 | 0.41 | 2.83 | 1.51 | 0.53 |
| 1 1/4 | 858-012 | 898-012 | 0.90 | 4.08 | 2.01 | 0.55 |
| 1 1/2 | 858-015 | 898-015 | 0.92 | 4.08 | 2.16 | 0.55 |
| 2 | 858-020 | 898-020 | 1.82 | 5.26 | 2.36 | 0.57 |
| 3 | 858-030 | 898-030 | 3.96 | 7.17 | 2.88 | 0.95 |

The 2 1/2" Thread Union is available as a fabrication from the 3" size Bushed down.

* Thread Joint Engagement

4533-3 FKM / 4533E-3 (EPDM) Female Adapter Union (S x FPT)



| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. S* | Dim. T† |
|--------------|--------------|---------------|------------------|--------|--------|---------|---------|
| 1/2 | 859-005 | 899-005 | 0.16 | 2.00 | 0.84 | 0.89 | 0.43 |
| 3/4 | 859-007 | 899-007 | 0.26 | 2.44 | 0.82 | 1.02 | 0.45 |
| 1 | 859-010 | 899-010 | 0.38 | 2.83 | 0.90 | 1.14 | 0.53 |
| 1 1/4 | 859-012 | 899-012 | 0.89 | 4.08 | 1.29 | 1.27 | 0.55 |
| 1 1/2 | 859-015 | 899-015 | 0.91 | 4.08 | 1.32 | 1.39 | 0.55 |
| 2 | 859-020 | 899-020 | 1.81 | 5.26 | 1.41 | 1.51 | 0.57 |
| 3 | 859-030 | 899-030 | 3.86 | 7.17 | 1.93 | 1.91 | 0.95 |

The 2 1/2" Socket x Thread Union is available as a fabrication from the 3" size Bushed down.

* Socket Depth

† Thread Joint Engagement


Metal Transition Unions

Purchase and Assembly Instructions

Transition Unions result from field assembly. First, the basic plastic Union is chosen, which includes selections for material of construction, O-ring type and connection style, remembering that the Union Nut screws onto the plastic Union Tailpiece. Next, the metal End Connector is chosen for material type and choice of thread connection style. Prior to installation, the mechanic must disassemble the Union, remove and discard the plastic End Connector, and then reassemble with the metal End Connector in its place.

Chemtrol
Fig. No.

TCBR-3 Brass End Connector (FPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. T* |
|--------------|--------------------------|------------------|--------|---------|
| 1/2 | ↑ | 0.33 | 1.02 | 0.43 |
| 3/4 | | 0.43 | 1.02 | 0.45 |
| 1 | Use Fig. No. & Nom. Size | 0.52 | 1.19 | 0.53 |
| 1 1/4 | | 0.85 | 1.42 | 0.55 |
| 1 1/2 | ↓ | 1.81 | 1.42 | 0.55 |
| 2 | | 2.74 | 1.57 | 0.57 |

* Thread Joint Engagement

TCSS-3 Stainless Steel End Connector (FPT)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. T* |
|--------------|--------------------------|------------------|--------|---------|
| 1/2 | ↑ | 0.30 | 1.02 | 0.43 |
| 3/4 | | 0.39 | 1.02 | 0.45 |
| 1 | Use Fig. No. & Nom. Size | 0.47 | 1.19 | 0.53 |
| 1 1/4 | | 0.77 | 1.42 | 0.55 |
| 1 1/2 | ↓ | 1.64 | 1.42 | 0.55 |
| 2 | | 2.48 | 1.57 | 0.57 |

* Thread Joint Engagement

TCBR-4 Brass End Connector (MPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. T* |
|--------------|--------------------------|------------------|--------|---------|
| 1/2 | ↑ | 0.31 | 1.66 | 0.43 |
| 3/4 | | 0.41 | 1.69 | 0.45 |
| 1 1/4 | Use Fig. No. & Nom. Size | 0.81 | 2.38 | 0.55 |
| 2 | | 2.60 | 2.63 | 0.57 |

* Thread Joint Engagement

Chemtrol
Fig. No.

TCSS-4 Stainless Steel End Connector (MPT)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. T* |
|--------------|--------------------------|------------------|--------|---------|
| 1/2 | ↑ | 0.28 | 1.66 | 0.43 |
| 3/4 | | 0.37 | 1.69 | 0.45 |
| 1 | Use Fig. No. & Nom. Size | 0.44 | 2.19 | 0.53 |
| 1 1/4 | | 0.73 | 2.38 | 0.55 |
| 1 1/2 | ↓ | 1.56 | 2.38 | 0.55 |

* Thread Joint Engagement




WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Couplings

Chemtrol
Fig. No.

5101 Socket Couplings (S x S)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. N |
|--------------|--------------------|------------------|--------|
| 1/4 | 1829-002 | 0.06 | 0.12 |
| 1/2 | 1829-005 | 0.10 | 0.24 |
| 3/4 | 1829-007 | 0.14 | 0.24 |
| 1 | 1829-010 | 0.22 | 0.24 |
| 1 1/4 | 1829-012 | 0.31 | 0.24 |
| 1 1/2 | 1829-015 | 0.40 | 0.24 |
| 2 | 1829-020 | 0.57 | 0.24 |
| 2 1/2 | 1829-025 | 0.73 | 0.19 |
| 3 | 1829-030 | 1.12 | 0.18 |
| 4 | 1829-040 | 1.94 | 0.18 |
| 6 | 1829-060 | 4.01 | 0.23 |
| 8* | 1829-080 | 9.23 | 0.22 |
| 10 | 1829-100 | 14.62 | 0.35 |
| 12 | 1829-120 | 25.26 | 0.46 |


5101-R Reducing Socket Coupling (S x S)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. N |
|---------------|--------------------|------------------|--------|
| 3/4 x 1/2 | 1829-101 | 0.13 | 0.43 |
| 1 x 1/2 | 1829-130 | 0.20 | 0.66 |
| 1 x 3/4 | 1829-131 | 0.20 | 0.54 |
| 1 1/4 x 3/4 | 1829-167 | 0.28 | 0.71 |
| 1 1/4 x 1 | 1829-168 | 0.30 | 0.59 |
| 1 1/2 x 1/2 | 1829-209 | 0.37 | XXX |
| 1 1/2 x 3/4 | 1829-210 | 0.35 | 0.75 |
| 1 1/2 x 1 | 1829-211 | 0.36 | 0.62 |
| 1 1/2 x 1 1/4 | 1829-212 | 0.38 | 0.50 |
| 2 x 1 | 1829-249 | 0.50 | 0.73 |
| 2 x 1 1/2 | 1829-251 | 0.54 | 0.48 |
| 3 x 2 | 1829-338 | 1.08 | 1.23 |
| 4 x 2 | 1829-420 | 1.73 | 1.57 |
| 4 x 3 | 1829-422 | 1.98 | 1.18 |

Other Reducing Couplings are produced by solvent cementing Reducer Bushings into Socket Couplings. They may be ordered as factory fabrications or may be assembled in the field.

Chemtrol
Fig. No.

5101-3-3 Thread Coupling (FPT x FPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|--------------|--------------------|------------------|--------|
| 1/4 | 1830-002 | 0.07 | 1.40 |
| 1/2 | 1830-005 | 0.08 | 2.02 |
| 3/4 | 1830-007 | 0.13 | 2.27 |
| 1 | 1830-010 | 0.21 | 2.52 |
| 1 1/4 | 1830-012 | 0.31 | 2.77 |
| 1 1/2 | 1830-015 | 0.46 | 3.02 |
| 2 | 1830-020 | 0.64 | 3.27 |
| 2 1/2 | 1830-025 | 0.89 | 3.75 |
| 3 | 1830-030 | 1.30 | 3.99 |
| 4 | 1830-040 | 2.31 | 4.74 |

5101-3-3-R Reducing Thread Coupling (FPT x FPT)


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|---------------|--------------------|------------------|--------|
| 3/4 x 1/2 | 1830-101 | 0.15 | 2.33 |
| 1 x 1/2 | 1830-130 | 0.22 | 2.69 |
| 1 x 3/4 | 1830-131 | 0.23 | 2.69 |
| 1 1/4 x 3/4 | 1830-167 | 0.32 | 2.99 |
| 1 1/4 x 1 | 1830-168 | 0.34 | 2.99 |
| 1 1/2 x 3/4 | 1830-210 | 0.39 | 3.15 |
| 1 1/2 x 1 | 1830-211 | 0.40 | 3.15 |
| 1 1/2 x 1 1/4 | 1830-212 | 0.42 | 3.15 |
| 2 x 1 | 1830-249 | 0.53 | 3.39 |
| 2 x 1 1/2 | 1830-251 | 0.58 | 3.39 |

Other Reducing Couplings are produced by solvent cementing Reducer Bushings into Socket Couplings. They may be ordered as factory fabrications or may be assembled in the field.

Adapters

Chemtrol
Fig. No.

5103 Female Adapter Coupling (S x FPT)

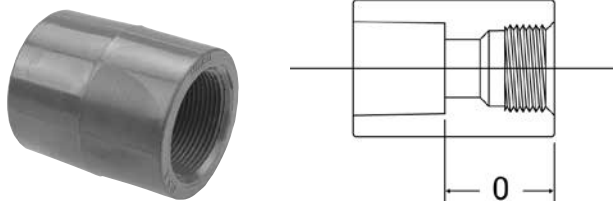

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. O |
|--------------|--------------------|------------------|--------|
| 1/4 | 1835-002 | 0.06 | 0.76 |
| 1/2 | 1835-005 | 0.10 | 1.13 |
| 3/4 | 1835-007 | 0.15 | 1.26 |
| 1 | 1835-010 | 0.23 | 1.38 |
| 1 1/4 | 1835-012 | 0.34 | 1.51 |
| 1 1/2 | 1835-015 | 0.43 | 1.63 |
| 2 | 1835-020 | 0.60 | 1.76 |
| 2 1/2 | 1835-025 | 0.82 | 1.97 |
| 3 | 1835-030 | 1.27 | 2.08 |
| 4 | 1835-040 | 1.13 | 2.46 |

5104 Male Adapter (S x MPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. OM |
|--------------|--------------------|------------------|---------|
| 1/2 | 1836-005 | 0.04 | 0.94 |
| 3/4 | 1836-007 | 0.06 | 0.96 |
| 1 | 1836-010 | 0.10 | 1.14 |
| 1 1/4 | 1836-012 | 0.14 | 1.11 |
| 1 1/2 | 1836-015 | 0.19 | 1.11 |
| 2 | 1836-020 | 0.27 | 1.19 |
| 2 1/2 | 1836-025 | 0.56 | 1.88 |
| 3 | 1836-030 | 0.79 | 1.97 |
| 4 | 1836-040 | 1.56 | 2.08 |

Elbows

Chemtrol
Fig. No.


5107 Socket 90° Elbow (S x S)

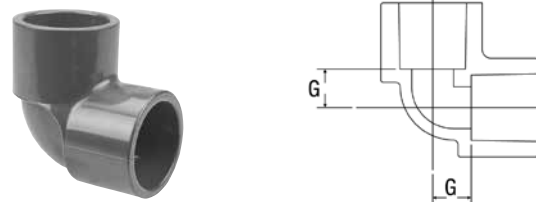

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G |
|--------------|--------------------|------------------|--------|
| 1/4 | 1806-002 | 0.03 | 0.33 |
| 1/2 | 1806-005 | 0.12 | 0.52 |
| 3/4 | 1806-007 | 0.18 | 0.68 |
| 1 | 1806-010 | 0.27 | 0.74 |
| 1 1/4 | 1806-012 | 0.41 | 0.91 |
| 1 1/2 | 1806-015 | 0.54 | 1.05 |
| 2 | 1806-020 | 0.81 | 1.26 |
| 2 1/2 | 1806-025 | 1.23 | 1.52 |
| 3 | 1806-030 | 1.98 | 1.82 |
| 4 | 1806-040 | 3.44 | 2.33 |
| 6 | 1806-060 | 8.38 | 3.48 |
| 8* | 1806-080 | 16.67 | 4.53 |
| 10 | 1806-100 | 30.14 | 5.72 |
| 12 | 1806-120 | 47.77 | 6.85 |

*8" CPVC tee, 90 elbow and 45 elbow derated to half of maximum pressure.

5107-3 Socket x Thread 90° Elbow (S x FPT)

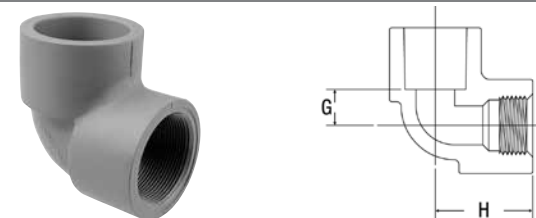


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. H |
|--------------|--------------------|------------------|--------|--------|
| 1/2 | 1807-005 | 0.13 | 0.52 | 1.41 |
| 3/4 | 1807-007 | 0.19 | 0.68 | 1.70 |
| 1 | 1807-010 | 0.30 | 0.74 | 1.88 |
| 1 1/4 | 1807-012 | 0.45 | 0.91 | 2.17 |
| 1 1/2 | 1807-015 | 0.59 | 1.05 | 2.44 |
| 2 | 1807-020 | 0.86 | 1.26 | 2.77 |

5107-12/5106-12 Flanged Elbow

Flanged fitting center-to-face dimensions may be found on page 41. When ordering, specify the figure number and the nominal size (e.g., 2" Schedule 80 CPVC flanged 90° Elbow–5107-12 2")

Chemtrol
Fig. No.


5107-3-3 Thread 90° Elbow (FPT x FPT)

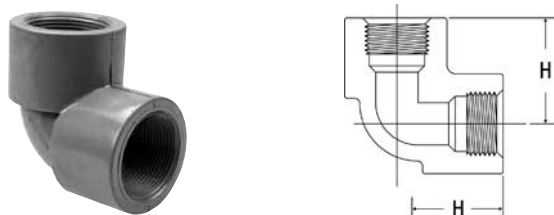

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. H |
|--------------|--------------------|------------------|--------|
| 1/4 | 1808-002 | 0.03 | 0.97 |
| 1/2 | 1808-005 | 0.13 | 1.41 |
| 3/4 | 1808-007 | 0.19 | 1.70 |
| 1 | 1808-010 | 0.30 | 1.88 |
| 1 1/4 | 1808-012 | 0.45 | 2.17 |
| 1 1/2 | 1808-015 | 0.59 | 2.44 |
| 2 | 1808-020 | 0.86 | 2.77 |
| 2 1/2 | 1808-025 | 1.34 | 3.30 |
| 3 | 1808-030 | 2.14 | 3.73 |
| 4 | 1808-040 | 3.85 | 4.61 |


Chemtrol
Fig. No.

5106-3-3 Thread 45° Elbow (FPT x FPT)

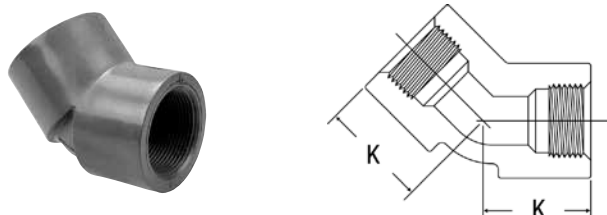

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. K |
|--------------|--------------------|------------------|--------|
| 1/4 | 1819-002 | 0.04 | 0.82 |
| 1/2 | 1819-005 | 0.11 | 1.15 |
| 3/4 | 1819-007 | 0.16 | 1.34 |
| 1 | 1819-010 | 0.27 | 1.51 |
| 1 1/4 | 1819-012 | 0.38 | 1.69 |
| 1 1/2 | 1819-015 | 0.52 | 1.85 |
| 2 | 1819-020 | 0.76 | 2.12 |
| 2 1/2 | 1819-025 | 1.09 | 2.45 |
| 3 | 1819-030 | 1.70 | 2.68 |
| 4 | 1819-040 | 3.06 | 3.29 |

5106 Socket 45° Elbow (S x S)

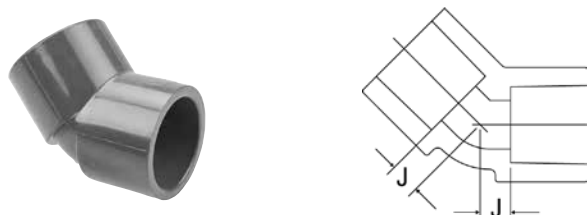


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. J |
|--------------|--------------------|------------------|--------|
| 1/4 | 1817-002 | 0.03 | 0.18 |
| 1/2 | 1817-005 | 0.10 | 0.26 |
| 3/4 | 1817-007 | 0.15 | 0.33 |
| 1 | 1817-010 | 0.24 | 0.37 |
| 1 1/4 | 1817-012 | 0.34 | 0.42 |
| 1 1/2 | 1817-015 | 0.47 | 0.46 |
| 2 | 1817-020 | 0.67 | 0.60 |
| 2 1/2 | 1817-025 | 0.99 | 0.67 |
| 3 | 1817-030 | 1.48 | 0.77 |
| 4 | 1817-040 | 2.62 | 1.01 |
| 6 | 1817-060 | 6.62 | 1.74 |
| 8* | 1817-080 | 13.63 | 2.20 |
| 10 | 1817-100 | 21.44 | 2.59 |
| 12 | 1817-120 | 35.59 | 3.05 |

*8" CPVC tee, 90 elbow and 45 elbow derated to half of maximum pressure.

Tees

5111 Socket Tee (S x S x S)

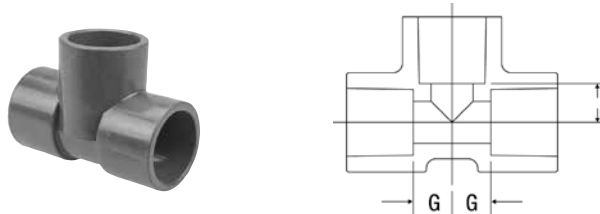

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. I |
|--------------|--------------------|------------------|--------|--------|--------|
| 1/4 | 1801-002 | 0.05 | 0.33 | 0.33 | 0.33 |
| 1/2 | 1801-005 | 0.16 | 0.52 | 0.52 | 0.52 |
| 3/4 | 1801-007 | 0.26 | 0.68 | 0.68 | 0.68 |
| 1 | 1801-010 | 0.39 | 0.74 | 0.74 | 0.74 |
| 1 1/4 | 1801-012 | 0.58 | 0.91 | 0.91 | 0.91 |
| 1 1/2 | 1801-015 | 0.78 | 1.05 | 1.05 | 1.05 |
| 2 | 1801-020 | 1.13 | 1.26 | 1.26 | 1.26 |
| 2 1/2 | 1801-025 | 1.72 | 1.52 | 1.52 | 1.52 |
| 3 | 1801-030 | 2.51 | 1.82 | 1.82 | 1.82 |
| 4 | 1801-040 | 4.41 | 2.33 | 2.33 | 2.33 |
| 6 | 1801-060 | 11.11 | 3.48 | 3.48 | 3.48 |
| 8* | 1801-080 | 22.28 | 4.53 | 4.53 | 4.53 |
| 10 | 1801-100 | 38.52 | 5.72 | 5.72 | 5.72 |
| 12 | 1801-120 | 63.55 | 6.85 | 6.85 | 6.85 |

*8" CPVC tee, 90 elbow and 45 elbow derated to half of maximum pressure.

Chemtrol
Fig. No.

5111-12 Flanged Tees


Flanged fitting center-to-face dimensions may be found on page 41. When ordering, specify the figure number and the nominal size (e.g., 2" Schedule 80 CPVC flanged tee–5111-12 2")

5111R Reducing Socket Tee (S x S x S)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. I |
|---------------------|--------------------|------------------|--------|--------|--------|
| 3/4 x 3/4 x 1/2 | 1801-101 | 0.19 | 0.51 | 0.51 | 0.62 |
| 1 x 1 x 1/2 | 1801-130 | 0.26 | 0.52 | 0.52 | 0.73 |
| 1 x 1 x 3/4 | 1801-131 | 0.28 | 0.62 | 0.62 | 0.73 |
| 1 1/2 x 1 1/2 x 3/4 | 1801-210 | 0.51 | 0.66 | 0.66 | 1.04 |
| 1 1/2 x 1 1/2 x 1 | 1801-211 | 0.56 | 0.76 | 0.76 | 1.03 |
| 2 x 2 x 1/2 | 1801-247 | 0.65 | 0.60 | 0.60 | 1.29 |
| 2 x 2 x 3/4 | 1801-248 | 0.70 | 0.70 | 0.70 | 1.29 |
| 2 x 2 x 1 | 1801-249 | 0.75 | 0.80 | 0.80 | 1.29 |
| 2 x 2 x 1 1/2 | 1801-251 | 0.89 | 1.07 | 1.07 | 1.29 |
| 3 x 3 x 2 | 1801-338 | 1.92 | 1.36 | 1.36 | 1.84 |
| 4 x 4 x 2 | 1801-420 | 3.02 | 1.39 | 1.39 | 2.34 |
| 4 x 4 x 3 | 1801-422 | 3.62 | 1.87 | 1.87 | 2.34 |
| 6 x 6 x 4 | 1801-532 | 7.69 | 2.56 | 2.56 | 3.52 |

Other Reducing Tees are produced by solvent cementing Reducer Bushings with Socket Tees. They may be ordered as factory fabrications or may be assembled in the field.

5112 Socket x Thread Tee (S x S x FPT)

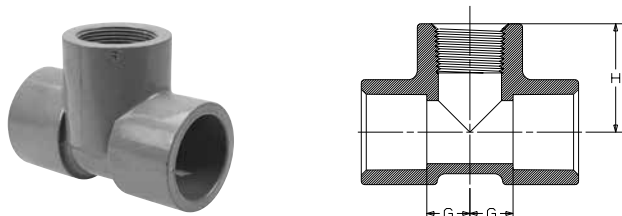


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. G | Dim. H |
|--------------|--------------------|------------------|--------|--------|--------|
| 1/2 | 1802-005 | 0.17 | 0.52 | 0.52 | 1.41 |
| 3/4 | 1802-007 | 0.28 | 0.68 | 0.68 | 1.70 |
| 1 | 1802-010 | 0.43 | 0.74 | 0.74 | 1.88 |
| 1 1/4 | 1802-012 | 0.62 | 0.91 | 0.91 | 2.17 |
| 1 1/2 | 1802-015 | 0.88 | 1.05 | 1.05 | 2.44 |
| 2 | 1802-020 | 1.23 | 1.26 | 1.26 | 2.77 |

For complete technical information and more, refer to our website at **www.chemtrol.com**.

Chemtrol
Fig. No.


5112-3-3 Thread Tee (FPT x FPT x FPT)

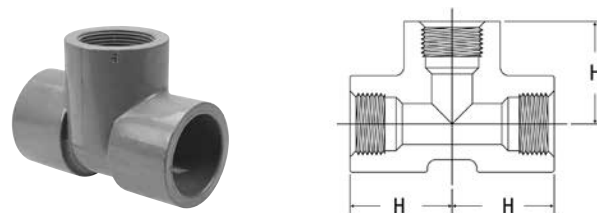

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. H |
|--------------|--------------------|------------------|--------|
| 1/4 | 1805-002 | 0.06 | 0.97 |
| 1/2 | 1805-005 | 0.17 | 1.41 |
| 3/4 | 1805-007 | 0.28 | 1.70 |
| 1 | 1805-010 | 0.43 | 1.88 |
| 1 1/4 | 1805-012 | 0.62 | 2.17 |
| 1 1/2 | 1805-015 | 0.88 | 2.44 |
| 2 | 1805-020 | 1.23 | 2.77 |
| 2 1/2 | 1805-025 | 1.91 | 3.30 |
| 3 | 1805-030 | 2.48 | 3.73 |
| 4 | 1805-040 | 4.88 | 4.61 |

Plugs

5116-4 Thread Plug (MPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. L |
|--------------|--------------------|------------------|--------|
| 1/4 | 1850-002 | 0.01 | 0.85 |
| 1/2 | 1850-005 | 0.03 | 1.04 |
| 3/4 | 1850-007 | 0.03 | 1.10 |
| 1 | 1850-010 | 0.06 | 1.25 |
| 1 1/4 | 1850-012 | 0.10 | 1.66 |
| 1 1/2 | 1850-015 | 0.14 | 1.78 |
| 2 | 1850-020 | 0.19 | 1.92 |
| 2 1/2 | 1850-025 | 0.29 | 2.18 |
| 3 | 1850-030 | 0.51 | 2.42 |
| 4 | 1850-040 | 0.95 | 2.81 |

1/4" Plug is solid, only

Caps

Chemtrol
Fig. No.


5117 Socket Cap* (S)

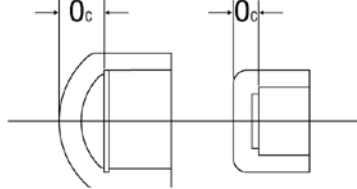

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. Oc |
|--------------|--------------------|------------------|---------|
| 1/4 | 1847-002 | 0.03 | 0.25 |
| 1/2 | 1847-005 | 0.06 | 0.39 |
| 3/4 | 1847-007 | 0.09 | 0.36 |
| 1 | 1847-010 | 0.14 | 0.41 |
| 1 1/4 | 1847-012 | 0.22 | 0.39 |
| 1 1/2 | 1847-015 | 0.28 | 0.41 |
| 2 | 1847-020 | 0.40 | 0.41 |
| 2 1/2 | 1847-025 | 0.62 | 1.56 |
| 3 | 1847-030 | 1.00 | 1.28 |
| 4 | 1847-040 | 1.61 | 1.57 |
| 6 | 1847-060 | 4.06 | 2.11 |

*Sizes 2" and smaller are flat; 2 1/2" and larger are domed.

5117-3 Thread Cap* (FPT)

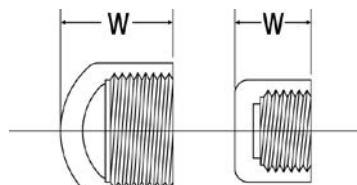

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. W |
|--------------|--------------------|------------------|--------|
| 1/4 | 1848-002 | 0.02 | 0.89 |
| 1/2 | 1848-005 | 0.07 | 1.28 |
| 3/4 | 1848-007 | 0.10 | 1.38 |
| 1 | 1848-010 | 0.16 | 1.55 |
| 1 1/4 | 1848-012 | 0.25 | 1.66 |
| 1 1/2 | 1848-015 | 0.31 | 1.80 |
| 2 | 1848-020 | 0.46 | 1.92 |
| 2 1/2 | 1848-025 | 0.68 | 2.34 |
| 3 | 1848-030 | 1.03 | 3.18 |
| 4 | 1848-040 | 1.85 | 3.85 |

*Sizes 2" and smaller are flat; 2 1/2" and larger are domed.

*Chemtrol has seminars available to educate in the design and installation of thermoplastic piping systems. For more information, call our customer service department at **800.343.5455**.*

Bushings

Design Styles

The design style of most bushings is to have a solid wall between the inside and outside connections. Some of the multistep reductions with exceedingly thick cross-sections are not solid. This design style achieves structural support with a web of ribs attaching the inner and outer connection walls, with the open area toward the exterior bushing face. The styles are denoted by W and S for webbed and solid designs respectively.




Webbed design



Solid design

Chemtrol
Fig. No.

5118 Flush Socket Reducer Bushing (SPG x S)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L | Dim. Nn |
|---------------|--------------------|------------------|--------------|--------|---------|
| 1/2 x 1/4 | 1837-072 | 0.04 | S | 1.17 | 0.53 |
| 3/4 x 1/2 | 1837-101 | 0.06 | S | 1.15 | 0.26 |
| 1 x 1/2 | 1837-130 | 0.07 | S | 1.28 | 0.39 |
| 1 x 3/4 | 1837-131 | 0.06 | S | 1.28 | 0.26 |
| 1 1/4 x 1/2 | 1837-166 | 0.11 | S | 1.41 | 0.52 |
| 1 1/4 x 3/4 | 1837-167 | 0.09 | S | 1.41 | 0.39 |
| 1 1/4 x 1 | 1837-168 | 0.07 | S | 1.41 | 0.27 |
| 1 1/2 x 1/2 | 1837-209 | 0.13 | W | 1.53 | 0.64 |
| 1 1/2 x 3/4 | 1837-210 | 0.11 | S | 1.53 | 0.51 |
| 1 1/2 x 1 | 1837-211 | 0.09 | S | 1.53 | 0.39 |
| 1 1/2 x 1 1/4 | 1837-212 | 0.07 | S | 1.53 | 0.26 |
| 2 x 1/2 | 1837-247 | 0.27 | W | 1.66 | 0.77 |
| 2 x 3/4 | 1837-248 | 0.27 | W | 1.66 | 0.64 |
| 2 x 1 | 1837-249 | 0.27 | W | 1.66 | 0.52 |
| 2 x 1 1/4 | 1837-250 | 0.23 | S | 1.66 | 0.39 |
| 2 x 1 1/2 | 1837-251 | 0.21 | S | 1.66 | 0.27 |
| 2 1/2 x 1 | 1837-289 | 0.46 | W | 1.94 | 0.80 |
| 2 1/2 x 1 1/2 | 1837-291 | 0.39 | S | 1.94 | 0.55 |
| 2 1/2 x 2 | 1837-292 | 0.26 | S | 1.93 | 0.42 |
| 3 x 1 1/2 | 1837-337 | 0.75 | W | 2.41 | 1.02 |
| 3 x 2 | 1837-338 | 0.70 | S | 2.41 | 0.90 |
| 3 x 2 1/2 | 1837-339 | 0.49 | S | 2.41 | 0.63 |



Chemtrol
Fig. No.

5118 Flush Socket Reducer Bushing (SPG x S) (cont.)

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. N _N |
|--------------|--------------------|------------------|--------------|---------------------|---------------------|
| 4 x 2 | 1837-420 | 1.25 | W | 2.80 | 1.29 |
| 4 x 3 | 1837-422 | 1.01 | S | 2.80 | 0.90 |
| 6 x 4 | 1837-532 | 2.97 | S | 3.05 | 0.77 |
| 8 x 6 | 1837-585 | 6.00 | S | 4.58 | 1.55 |
| 10 x 6 | 1837-422 | 10.80 | W | 5.57 | 2.54 |
| 10 x 8 | 1837-626 | 9.36 | S | 5.57 | 1.07 |
| 12 x 8 | 1837-668 | 18.79 | W | 6.57 | 2.07 |
| 12 x 10 | 1837-670 | 12.78 | S | 6.57 | 1.07 |

Other size reductions are produced by solvent cementing appropriate Reducer Bushings together. They may be ordered as factory fabrications or may be assembled in the field.

5118-3 Flush Spigot x Thread Reducer Bushing (SPG x FPT)




| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. Y* |
|---------------|--------------------|------------------|--------------|---------------------|---------|
| 1/2 x 1/4 | 1838-072 | 0.03 | S | 1.17 | 0.31 |
| 3/4 x 1/2 | 1838-101 | 0.03 | S | 1.29 | 0.43 |
| 1 x 1/2 | 1838-130 | 0.07 | S | 1.56 | 0.43 |
| 1 x 3/4 | 1838-131 | 0.06 | S | 1.56 | 0.45 |
| 1 1/4 x 1/2 | 1838-166 | 0.15 | S | 1.66 | 0.43 |
| 1 1/4 x 3/4 | 1838-167 | 0.13 | S | 1.66 | 0.45 |
| 1 1/4 x 1 | 1838-168 | 0.11 | S | 1.66 | 0.53 |
| 1 1/2 x 1/2 | 1838-209 | 0.23 | S | 1.77 | 0.43 |
| 1 1/2 x 3/4 | 1838-210 | 0.21 | S | 1.77 | 0.45 |
| 1 1/2 x 1 | 1838-211 | 0.19 | S | 1.77 | 0.53 |
| 1 1/2 x 1 1/4 | 1838-212 | 0.13 | S | 1.77 | 0.55 |
| 2 x 1/2 | 1838-247 | 0.36 | S | 1.91 | 0.43 |
| 2 x 3/4 | 1838-248 | 0.34 | S | 1.91 | 0.45 |
| 2 x 1 | 1838-249 | 0.32 | S | 1.91 | 0.53 |
| 2 x 1 1/4 | 1838-250 | 0.26 | S | 1.91 | 0.55 |
| 2 x 1 1/2 | 1838-251 | 0.21 | S | 1.91 | 0.55 |
| 2 1/2 x 2 | 1838-292 | 0.32 | S | 2.17 | 0.57 |
| 3 x 2 | 1838-338 | 0.73 | S | 2.41 | 0.57 |
| 3 x 2 1/2 | 1838-339 | 0.57 | S | 2.41 | 0.87 |
| 4 x 2 | 1838-420 | 1.30 | W | 2.80 | 0.57 |
| 4 x 3 | 1838-422 | 1.06 | S | 2.80 | 0.95 |

Other size reductions are produced by solvent cementing appropriate Reducer Bushings together. They may be ordered as factory fabrications or may be assembled in the field.

*Typical male component engagement, hand tight (L_L in ASME B1.20.1 thread spec.) plus 1 1/2 turns.

Chemtrol
Fig. No.

5118-3-4 Flush Thread Reducer Bushing (MPT x FPT)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Design Style | Dim. L _L | Dim. Y* |
|---------------|--------------------|------------------|--------------|---------------------|---------|
| 1/2 x 1/4 | 1839-072 | 0.02 | S | 0.95 | 0.25 |
| 3/4 x 1/2 | 1839-101 | 0.03 | S | 0.95 | 0.25 |
| 1 x 1/2 | 1839-130 | 0.06 | S | 1.24 | 0.38 |
| 1 x 3/4 | 1839-131 | 0.05 | S | 1.24 | 0.38 |
| 1 1/4 x 1/2 | 1839-166 | 0.13 | S | 1.27 | 0.38 |
| 1 1/4 x 3/4 | 1839-167 | 0.11 | S | 1.27 | 0.38 |
| 1 1/4 x 1 | 1839-168 | 0.09 | S | 1.27 | 0.38 |
| 1 1/2 x 1/2 | 1839-209 | 0.20 | S | 1.28 | 0.38 |
| 1 1/2 x 3/4 | 1839-210 | 0.18 | S | 1.28 | 0.38 |
| 1 1/2 x 1 | 1839-211 | 0.17 | S | 1.28 | 0.38 |
| 1 1/2 x 1 1/4 | 1839-212 | 0.11 | S | 1.28 | 0.38 |
| 2 x 1/2 | 1839-247 | 0.30 | S | 1.32 | 0.38 |
| 2 x 3/4 | 1839-248 | 0.28 | S | 1.32 | 0.38 |
| 2 x 1 | 1839-249 | 0.28 | S | 1.32 | 0.38 |
| 2 x 1 1/4 | 1839-250 | 0.27 | S | 1.32 | 0.38 |
| 2 x 1 1/2 | 1839-251 | 0.15 | S | 1.32 | 0.38 |
| 2 1/2 x 2 | 1839-292 | 0.24 | S | 2.18 | 0.57 |
| 3 x 1 1/2 | 1839-337 | 0.64 | W | 2.42 | 0.55 |
| 3 x 2 | 1839-338 | 0.59 | S | 2.42 | 0.57 |
| 3 x 2 1/2 | 1839-339 | 0.54 | S | 2.42 | 0.87 |
| 4 x 2 | 1839-420 | 1.01 | W | 2.81 | 0.57 |
| 4 x 3 | 1839-422 | 0.95 | S | 2.81 | 0.95 |


Other size reductions are produced by solvent cementing appropriate Reducer Bushings together. They may be ordered as factory fabrications or may be assembled in the field.

*Typical male component engagement, hand tight (L_L in ASME B1.20.1 thread spec.) plus 1 1/2 turns.

Class 150 Flanges


For flange dimensions that comply with ANSI B16.5, 150 lb., steel flanges, see Reference Data on following pages.

5151-H Socket Flange (S), One-Piece (Solid)

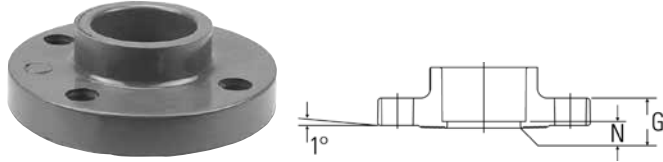

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. N |
|--------------|--------------------|------------------|--------|--------|
| 1/2 | 1851-H05 | 0.22 | 0.54 | 0.20 |
| 3/4 | 1851-H07 | 0.31 | 0.61 | 0.17 |
| 1 | 1851-H10 | 0.45 | 0.68 | 0.18 |
| 1 1/4 | 1851-H12 | 0.59 | 0.72 | 0.20 |
| 1 1/2 | 1851-H15 | 0.73 | 0.82 | 0.21 |
| 2 | 1851-H20 | 1.12 | 0.91 | 0.26 |
| 2 1/2 | 1851-H25 | 1.77 | 1.02 | 0.20 |
| 3 | 1851-H30 | 2.27 | 1.13 | 0.28 |
| 4 | 1851-H40 | 3.17 | 1.24 | 0.31 |
| 6 | 1851-H60 | 5.04 | 1.36 | 0.31 |
| 8 | 1851-H80 | 9.35 | 1.52 | 0.35 |

5151-H-3 Thread Flange (FPT), One-Piece (Solid)

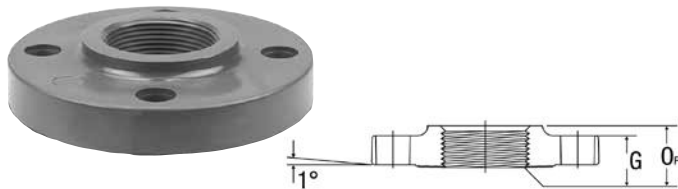


| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O_F |
|--------------|--------------------|------------------|--------|----------|
| 1/2 | 1852-H05 | 0.23 | 0.54 | 0.88 |
| 3/4 | 1852-H07 | 0.34 | 0.61 | 0.91 |
| 1 | 1852-H10 | 0.44 | 0.68 | 1.08 |
| 1 1/4 | 1852-H12 | 0.55 | 0.72 | 1.11 |
| 1 1/2 | 1852-H15 | 0.69 | 0.82 | 1.12 |
| 2 | 1852-H20 | 1.05 | 0.91 | 1.17 |
| 2 1/2 | 1852-H25 | 1.65 | 1.02 | 1.42 |
| 3 | 1852-H30 | 1.84 | 1.13 | 1.55 |
| 4 | 1852-H40 | 2.80 | 1.24 | 1.67 |

*Chemtrol has seminars available to educate in the design and installation of thermoplastic piping systems. For more information, call our customer service department at **800.343.5455**.*


Chemtrol
Fig. No.

5119-H Blind Flange, One-Piece (Solid)

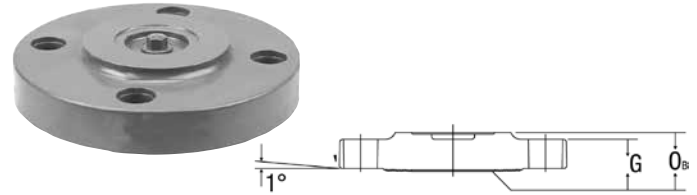

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O_B |
|--------------|--------------------|------------------|--------|----------|
| 1/2 | 1853-H05 | 0.28 | 0.54 | 0.76 |
| 3/4 | 1853-H07 | 0.34 | 0.61 | 0.83 |
| 1 | 1853-H10 | 0.48 | 0.68 | 0.88 |
| 1 1/4 | 1853-H12 | 0.63 | 0.72 | 0.95 |
| 1 1/2 | 1853-H15 | 0.81 | 0.82 | 1.04 |
| 2 | 1853-H20 | 1.24 | 0.91 | 1.12 |
| 2 1/2 | 1853-H25 | 2.03 | 1.02 | 1.22 |
| 3 | 1853-H30 | 2.65 | 1.13 | 1.39 |
| 4 | 1853-H40 | 3.94 | 1.24 | 1.57 |
| 6 | 1853-H60 | 6.93 | 1.36 | 1.60 |
| 8 | 1853-H80 | 11.23 | 1.51 | 1.77 |


5151-W Socket Flange (S), One-Piece (Webbed Design)

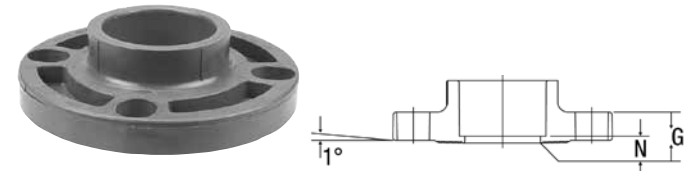

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. N |
|--------------|--------------------|------------------|--------|--------|
| 2 | 1851-020 | 0.89 | 0.91 | 0.26 |
| 3 | 1851-030 | 1.80 | 1.13 | 0.28 |
| 4 | 1851-040 | 2.72 | 1.24 | 0.31 |
| 6 | 1851-060 | 4.14 | 1.36 | 0.31 |

Note: One-piece webbed flanges have oblong bolt holes which permit mating with ANSI B16.5, 150 lb.; BS 1560, class 150; ISO 2084, PN10; and DIN EN 1092, PN10.


5151-W-3 Thread Flange (FPT), One-Piece (Webbed Design)

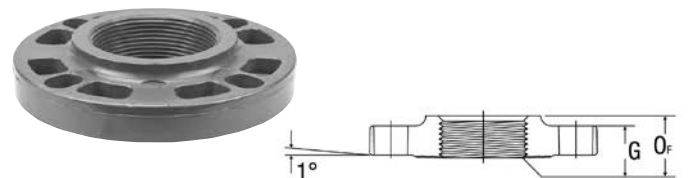

| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O_F |
|--------------|--------------------|------------------|--------|----------|
| 2 | 1852-020 | 0.88 | 0.91 | 1.17 |
| 3 | 1852-030 | 1.73 | 1.13 | 1.55 |
| 4 | 1852-040 | 2.53 | 1.24 | 1.67 |

Chemtrol
Fig. No.


5119-W Blind Flange, One-Piece (Webbed Design)



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. G | Dim. O _B |
|--------------|--------------------|------------------|--------|---------------------|
| 2 | 1853-020 | 0.88 | 0.91 | 1.17 |
| 3 | 1853-030 | 1.98 | 1.13 | 1.39 |
| 4 | 1853-040 | 2.88 | 1.24 | 1.51 |
| 6 | 1853-060 | 5.07 | 1.36 | 1.60 |

Note: One-piece webbed flanges have oblong bolt holes which permit mating with ANSI B16.5, 150 lb.; BS 1560, class 150; ISO 2084, PN10; and DIN EN 1092, PN10.

5151-A Socket Flange (S), Van Stone*



| Nominal Size | Universal Part No. | Approx. Lbs./Ea. | Dim. A | Dim. B | Dim. D ₀ | Dim. R _f | Dim. N |
|--------------|--------------------|------------------|--------|--------|---------------------|---------------------|--------|
| 1/2 | 1854-005 | 0.21 | 1.00 | .50 | 3.49 | 1.48 | 0.11 |
| 3/4 | 1854-007 | 0.26 | 1.12 | .50 | 3.86 | 1.75 | 0.11 |
| 1 | 1854-010 | 0.41 | 1.25 | .56 | 4.24 | 2.04 | 0.11 |
| 1 1/4 | 1854-012 | 0.44 | 1.37 | .63 | 4.61 | 2.50 | 0.11 |
| 1 1/2 | 1854-015 | 0.59 | 1.50 | .69 | 4.99 | 2.78 | 0.11 |
| 2 | 1854-020 | 1.00 | 1.62 | .75 | 5.98 | 3.41 | 0.11 |
| 2 1/2 | 1854-025 | 1.49 | 1.93 | .94 | 6.98 | 4.11 | 0.15 |
| 3 | 1854-030 | 1.87 | 2.40 | 1.04 | 7.48 | 4.80 | 0.50 |
| 4 | 1854-040 | 2.84 | 2.75 | 1.16 | 8.95 | 6.17 | 0.48 |
| 6 | 1854-060 | 4.88 | 3.55 | 1.28 | 10.97 | 7.95 | 0.53 |
| 8 | 1854-080 | 13.13 | 5.00 | 1.42 | 13.46 | 10.42 | 0.50 |

* 1/2" through 2-1/2" van stone flanges sold by NIBCO are not manufactured from Corzan® CPVC. 3" through 8" van stone flanges sold by NIBCO are manufactured from Corzan® CPVC.

Van Stone Flange Assembly List

| Item | Description | Material |
|------|---------------|----------|
| 1 | Connector Hub | CPVC |
| 3 | Flange Ring | CPVC |

Chemtrol
Fig. No.




NR 51 Flange Gaskets, for Class 150 Flanges

Note: These gaskets are 1/8" thick, full face polychloroprene (CR), 70 durometer.



| Nominal Size | Part No. | Approx. Lbs./Ea. |
|--------------|----------------------------|------------------|
| 1/2 | Use Figure No. & Nom. Size | 0.11 |
| 3/4 | | 0.12 |
| 1 | | 0.13 |
| 1 1/4 | | 0.14 |
| 1 1/2 | | 0.15 |
| 2 | | 0.20 |
| 2 1/2 | | 0.25 |
| 3 | | 0.28 |
| 4 | | 0.30 |
| 6 | | 0.40 |
| 8 | | 0.50 |

Flanged Fittings*— Fabricated from Molded Components



| Nominal Size | Fig. No. 5111-12 Flanged Tee | | Fig. No. 5107-12 Flanged 90° ELL | | Fig. No. 5106-12 Flanged 45° ELL | |
|--------------|---------------------------------|---------|-------------------------------------|---------|-------------------------------------|---------|
| | Approx. Lbs./Ea. | Dim. A | Approx. Lbs./Ea. | Dim. A | Approx. Lbs./Ea. | Dim. B |
| 1 | 1.98 | 3 3/32 | 1.34 | 3 3/32 | 1.31 | 2 23/32 |
| 1 1/4 | 2.75 | 3 19/32 | 1.86 | 3 19/32 | 1.79 | 3 3/32 |
| 1 1/2 | 3.49 | 3 31/32 | 2.35 | 3 31/32 | 2.27 | 3 13/32 |
| 2 | 5.23 | 4 15/32 | 3.54 | 4 15/32 | 3.40 | 3 27/32 |
| 2 1/2 | 8.38 | 5 7/32 | 5.67 | 5 7/32 | 5.43 | 4 13/32 |
| 3 | 11.32 | 5 13/32 | 7.85 | 5 13/32 | 7.35 | 4 25/32 |
| 4 | 17.36 | 7 3/32 | 12.07 | 7 3/32 | 11.29 | 5 25/32 |
| 6 | 32.74 | 9 25/32 | 24.50 | 9 25/32 | 22.75 | 8 1/2 |
| 8 | — | — | — | — | — | — |


* Flanged fittings are produced by solvent cementing socket flanges to socket fittings with short plain end pipe nipples. They may be ordered as factory fabrications or may be assembled in the field.

*Chemtrol sells its products through a select group of highly trained distributors. Please call **800.343.5455** for a listing of distributors in your area.*

Unions

Chemtrol
Fig. No.

5133 FKM/5133E (EPDM) Socket Union (S x S)




| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. S* |
|--------------|--------------|---------------|------------------|--------|--------|---------|
| 1/4 | 1857-002 | 1897-002 | 0.10 | 1.70 | 0.41 | 0.64 |
| 1/2 | 1857-005 | 1897-005 | 0.17 | 1.99 | 0.43 | 0.89 |
| 3/4 | 1857-007 | 1897-007 | 0.30 | 2.43 | 0.44 | 1.02 |
| 1 | 1857-010 | 1897-010 | 0.43 | 2.82 | 0.43 | 1.14 |
| 1 1/4 | 1857-012 | 1897-012 | 0.94 | 4.07 | 0.79 | 1.27 |
| 1 1/2 | 1857-015 | 1897-015 | 1.01 | 4.07 | 0.81 | 1.39 |
| 2 | 1857-020 | 1897-020 | 1.98 | 5.24 | 0.80 | 1.52 |
| 3 | 1857-030 | 1897-030 | 3.77 | 7.15 | 0.94 | 1.91 |

The 2 1/2" Socket Union is available as a fabrication from the 3" size Bushed down.

* Socket Depth

Chemtrol
Fig. No.

5133-3 FKM / 5133E-3 (EPDM) Female Adapter Union (S x FPT)




| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. S* | Dim. T† |
|--------------|--------------|---------------|------------------|--------|--------|---------|---------|
| 1/2 | 1859-005 | 1899-005 | 0.163 | 1.99 | 0.84 | 0.89 | 0.43 |
| 3/4 | 1859-007 | 1899-007 | 0.282 | 2.43 | 0.81 | 1.02 | 0.45 |
| 1 | 1859-010 | 1899-010 | 0.411 | 2.82 | 0.90 | 1.14 | 0.53 |
| 1 1/4 | 1859-012 | 1899-012 | 0.943 | 4.07 | 1.29 | 1.27 | 0.55 |
| 1 1/2 | 1859-015 | 1899-015 | 0.967 | 4.07 | 1.32 | 1.39 | 0.55 |
| 2 | 1859-020 | 1899-020 | 1.880 | 5.24 | 1.41 | 1.52 | 0.57 |
| 3 | 1859-030 | 1899-030 | 4.100 | 7.15 | 1.90 | 1.91 | 0.95 |

* Socket Depth

† Thread Joint Engagement

5133-3-3 FKM/5133E-3-3 (EPDM) Threaded Union (FPT x FPT)



| Nominal Size | FKM Part No. | EPDM Part No. | Approx. Lbs./Ea. | Dim. A | Dim. L | Dim. S* |
|--------------|--------------|---------------|------------------|--------|--------|---------|
| 1/4 | 1858-002 | 1898-002 | 0.10 | 1.69 | 1.07 | 0.31 |
| 1/2 | 1858-005 | 1898-005 | 0.17 | 1.99 | 1.30 | 0.43 |
| 3/4 | 1858-007 | 1898-007 | 0.30 | 2.43 | 1.37 | 0.45 |
| 1 | 1858-010 | 1898-010 | 0.44 | 2.82 | 1.51 | 0.53 |
| 1 1/4 | 1858-012 | 1898-012 | 0.97 | 4.07 | 2.01 | 0.55 |
| 1 1/2 | 1858-015 | 1898-015 | 1.00 | 4.07 | 2.16 | 0.57 |
| 2 | 1858-020 | 1898-020 | 1.98 | 5.24 | 2.36 | 0.57 |
| 3 | 1858-030 | 1898-030 | 3.99 | 7.15 | 2.685 | 0.95 |

* Thread Joint Engagement

Valve Installation

For socket-end valves refer to the solvent cement joining instructions for PVC and CPVC, and the heat fusion joining instructions for PP and PVDF in the *Chemtrol Thermoplastic Piping Technical Manual*. For threaded-end valves usually one or two turns beyond hand-tight using a suitable strap wrench, if necessary, is sufficient. Do not overtighten threads. ASME B1.20.1 defines hand tight as 4 to 5 threads for sizes through 2" and 5 to 6-3/4 threads for sizes greater than 2". For flanged-end valves refer to the plastic flange joining instructions in the *Chemtrol Thermoplastic Piping Technical Manual*. CAUTION: Over tightening threads may result in damage to products.

Ball and Check Valves

When joining union-end valves, or when flanging end connectors, never make the joint to the end connectors while they are attached to the valve body. Remove the union nuts and end connectors from the valve cartridge first. Slide the union nut (smallest bore first) over the pipe or nipple and flange hub (when flanging) before making the joint to the end connector.

After allowing the proper joint drying time, or cooling time in the case of PP and PVDF, end connections may be joined to the valve cartridge. O-rings provide the seal between the valve cartridge faces and the end connectors. Ensure that these O-rings are clean and in their proper grooves before slipping the valve cartridge between its end connectors. Slide the union nuts over the end connectors and screw onto the valve cartridge threads, no more than hand tight. Once the end connector engages the O-ring seal, no more than 1/8 to 1/4 turn of the union nut will fully compress the O-ring in its groove. CAUTION: Over tightening threads may result in damage to products.

The pipe supports surrounding the valve must be loose and the adjoining piping must be well aligned with the valve. The union nuts cannot be expected to bend and/or stretch the adjoining pipe in order to allow the end connectors to make the required flush seal against the valve cartridge faces.

3-Way Valve Seat Adjustment - The seat-carrier in multiport and diverter valves is of the Model-A design, meaning that it is not fastened to the valve body with internal threads. Therefore, the union nut on the valve end with "ADJ" marked on the body serves the dual purpose of external adjustment for "squeeze" on the operating envelope within the cartridge, preventing leakage across the ball, as well as compression of the face-seal, preventing shell leakage at the cartridge face. Upon installation of multiport or diverter valves, with the handle parallel with the body and fully against the handle/body stop, tighten that union nut on the "ADJ" body end while minutely operating the handle off the stop and back to the stop. The handle turning torque should become snug, but not excessive when the valve is properly adjusted for leak-free operation. If proper adjustment cannot be made by hand tightening the union nut (valves larger than 1-1/2"), a suitable strap-wrench may be used.

CAUTION: Over tightening threads may result in damage to products.

Check Valves - Check valves should be installed at least four feet from the discharge side of a pump. Ball chatter and internal damage may result if fluid flow is too turbulent. Also, in keeping with good mechanical design practice, the upper threshold of fluid flow recommended from Chemtrol products is five feet per second.

The valves may be installed vertically or horizontally (refer to the preceding page for minimum seating head requirements), but the molded-in flow arrow on the valve cartridge must be installed in the direction of the fluid flow such that reverse flow will be checked.

Foot Valve Conversion - Foot valve screen housing assemblies are available to convert ball check valves to foot valves in the field. The assemblies are to be installed on the supply side of a standard Chemtrol Ball Check Valve, replacing the union nut and end connector. Foot valves are normally installed in an open tank or sump on the suction side of a pump. Its function is to screen debris from entering the pump.

Vent Valve Conversion - The ball in a standard Chemtrol Ball Check Valve is intended by design to have a greater density than the fluid medium. When installed in the upright (seat down - arrow on body pointed in direction of normal flow) to horizontal positions, gravitational force on the ball allows it to sink in the fluid and seal at the seat in order to prevent back-flow when directional flow is ceased (e.g., pump stops). However, the mechanical designer sometimes wants air or gas to be vented from a piping system or vessel as fluid fills the system, but to check flow of fluid beyond the vent tube. As fluid is evacuated from the system or vessel, the vent valve must open to prevent formation of a vacuum. The field conversion of the check valve to the venting function requires the replacement of the standard ball with a polypropylene ball, which will float in water or fluids of greater density. A vent valve must be installed in the inverted vertical position (seat up - arrow on body pointed in opposite direction of normal venting). The floater ball must also be chemically resistant to the medium. Failure to follow these instructions may cause stress cracking to the polypropylene ball (e.g., bleach, concentrated sulfuric or nitric acids).

Butterfly Valves

Chemtrol® Butterfly Valves are installed by bolting between two pipe flanges and may be mounted in any position. They are designed to be operated with pipes up to and including Schedule 80 wall thicknesses. If the I.D. of connecting pipe or equipment is smaller than Schedule 80, it will be necessary to chamfer the inside edge to avoid interference with the rotating butterfly disk.

Alignment - Excessive angular misalignment and/or axial displacement is detrimental to proper function of the companion flange face-seals built into the valves. For reference, ANSI/ASME B31.3, Code for Pressure Piping, Chemical Plant, and Petroleum Refinery Piping, stipulates that flange faces shall be aligned to the design plane (butterfly valve in this case) to within 1/16" in./ft. (0.5%) maximum measured across any diameter, and flange bolt holes shall be aligned to within 1/8" maximum offset.

Insertion in System - The end flaps of the elastomeric seat (Model B) or the O-rings (Model C) serve as face-seals for the companion flanges to be mounted on each side of the butterfly valve. Other gaskets are not to be used. Flange clearance required for insertion is given in the bolting chart below. For installation between the flanges, the valve should be partially open, but not so far as to damage the edge of the disk on mating flanges. If the spacing between mating flanges is tight, the valve sealing surface should be coated with a lubricant to prevent distortion during installation. If more than soapy water is required, a non-hydrocarbon base material, such as silicone grease, may be used on EPDM face-seals. An oil-based lubricant, such as glycerin, is acceptable for FKM face-seals. Insert valve in desired position and install bolts with metal back-up washers (corresponding to ANSI B18.22.1, designated N - narrow washers previously known as SAE series washers) under both the bolt head and nut. Note: Bolt size x washer OD - 1/2", 1.092"; 5/8", 1.342"; 3/4", 1.499"; 7/8", 1.780".


Bolting - Snug up the bolts finger-tight so that the circumference of the inside bore of each companion flange evenly touches the face-seals of the butterfly valve. Make sure the valve is properly aligned before proceeding. Then, use of a torque wrench for pulling on the nuts is suggested for actual bolt tightening. It is critical that bolts be equally tightened in a sequential pattern diametrically opposed to each other, and that the final recommended bolt torque be accomplished through a minimum of three progressive stages of tightening. The recommended progressive tightening pattern and the final torque levels are shown on the following chart and diagram:

| Valve Size (Nom.) | Flange Clearance Model B (in.) | Flange Clearance Model C (in.) | Bolt Diameter (in.) | Bolts Required (No.) | Recommended Bolt Torque ² (Ft.-Lbs.) |
|-------------------|--------------------------------|--------------------------------|---------------------|----------------------|---|
| * 2 | - | 1.69 | 5/8 | 4 | 20-30 |
| * 2 1/2 | - | 1.81 | 5/8 | 4 | 20-30 |
| 3 | 2.00 | 1.81 | 5/8 | 4 or 8 ¹ | 20-30 |
| 4 | 2.25 | 2.06 | 5/8 | 8 | 20-30 |
| 6 | 2.81 | 2.19 | 3/4 | 8 | 33-50 |
| * 8 | - | 2.38 | 3/4 | 8 | 33-50 |
| * 10 | - | 2.69 | 7/8 | 12 | 53-75 |

* Available in Model C only.

1 Four (4) bolt hole pattern for ANSI 150 flange pattern; eight (8) bolt hole pattern for DIN standard flange pattern.

2 Refers to well-lubricated bolts.



When valve installation is complete, open and close the valve to check for ease of operation and proper alignment. Caution: Do not allow the valve to support the weight of any related piping. Direct support is required when mechanical operators or actuators are utilized. Failure to follow these instructions may result in damage to products or property.

Valve Maintenance

Valve repair should only be performed by qualified maintenance personnel. Contact the nearest Chemtrol distributor should further information be required.

Ball Valves

Should a valve need repair, depressurize and drain the system on all sides of the valve. Loosen the valve union nuts and slide them back over the end connectors. To minimize downtime, it may be advisable to have a replacement valve cartridge ready to install in place of the one to be repaired. An advantage of the Chemtrol design is that the current model is interchangeable with all earlier models. Disassemble valve cartridge following the instructions provided with the valve.

Butterfly Valves

Following testing and soon after commissioning of a system, if either the Model B or Model C valve develops a leak at the top bearing, the flange face-seal(s), and/or across the valve disk, the most likely cause of the leak would be inappropriate selection of the elastomeric seat and seals. In this case, check the NIBCO Chem-Guide for compatibility with the fluid medium. If there is leakage at the flange face-seal(s) only, further tightening of bolts will almost never stop any flange joint leak. Rather, the remedy is to disassemble the joint and reseal the flanges on the valve face-seals, being careful to follow the bolting paragraph under the butterfly valve installation instructions.

After extended operation, if leakage should occur at the top bearing or across the valve disk of either the Model B or Model C valve, this is a likely cause of wear to the elastomeric seat and/or O-ring seals, requiring their replacement. In most cases, valve replacement may be less expensive than parts replacement. Replacement of the entire Model C valve is recommended because it cannot be disassembled and only the handle assembly and o-ring face-seals may be replaced. When maintenance to a Model B valve is required, refer to the disassembly and reassembly instructions included with the valve.

General Design and Installation Guidelines


- The manufacturer does NOT recommend running a thermoplastic piping system with velocity greater than 5 feet/sec.
- **WARNING:** Do NOT close a quarter turn valve quickly. This will create shock in the system and cause damage to property or personal injury.
- Installing thermoplastic piping components at temperatures at 40°F requires extra precaution in handling because the material may be at increased risk of impact damage.
- **WARNING:** Follow the recommended bolt tightening techniques, including sequence of tightening and final torque values, for flanges and butterfly valves because failure to do so will result in damage to the product.
- Do not allow primer or solvent cement to come in contact with the sealing face of valve end connectors or internal components of the valve.
- Valves must be installed with the molded-in flow arrow(s) on the valve cartridge facing in the direction of the fluid flow.
- To ensure comprehensive chemical compatibility, a piping system must take into consideration the chemical resistance of all system components, including, but not limited to, plastic components, solvent cements or thread pastes (if applicable), elastomeric seals, all valve components and lubricants. Testing under field conditions may be the best way to ensure selected materials will work in a particular application. NIBCO does not recommend the use of any thread lubricant/sealant other than PTFE tape.
- Consult the Chemtrol Thermoplastic Piping Technical Manual for additional design and installation requirements for Chemtrol products.

Actuator Mounting Data

The same plastic modular mounting kits, including fastener hardware and drive couplings, used for factory assembly, are available for field assembly of Chemtrol® actuation equipment to installed valves. When designing the CPVC mounting brackets and adapter plates we recognized that some facilities specify Chemtrol® plastic valves, but are standardized on other actuator brands. Therefore, holes in the mounting platforms are slotted and the heights of platforms over valve stems are set to offer the broadest mounting flexibility. For many reasons, including economic, the use of Chemtrol® mount kits is also encouraged when joining Chemtrol® valves to other actuator brands, and the critical data on this page is offered to facilitate adaptation.

TU Tru-Bloc Ball Valve Min. Torque & Actuator-Mounting Dimensions

| Valve Size | Min. Torque (in. lbs.) | A | B | C | D |
|---------------|------------------------|------|------|------|------|
| 1/2 | 40 | 3.62 | 2.87 | 1.35 | 0.96 |
| 3/4 | 50 | 3.62 | 2.87 | 1.87 | 1.53 |
| 1 | 50 | 3.62 | 2.87 | 2.16 | 1.70 |
| 1 1/4 / 1 1/2 | 90 | 5.25 | 4.50 | 3.01 | 2.46 |
| 2 | 170 | 5.25 | 4.50 | 3.75 | 3.07 |
| 3 | 360 | 7.00 | 6.00 | 4.75 | 4.00 |
| 4/6 | 540 | 8.35 | 7.35 | 5.81 | 5.31 |

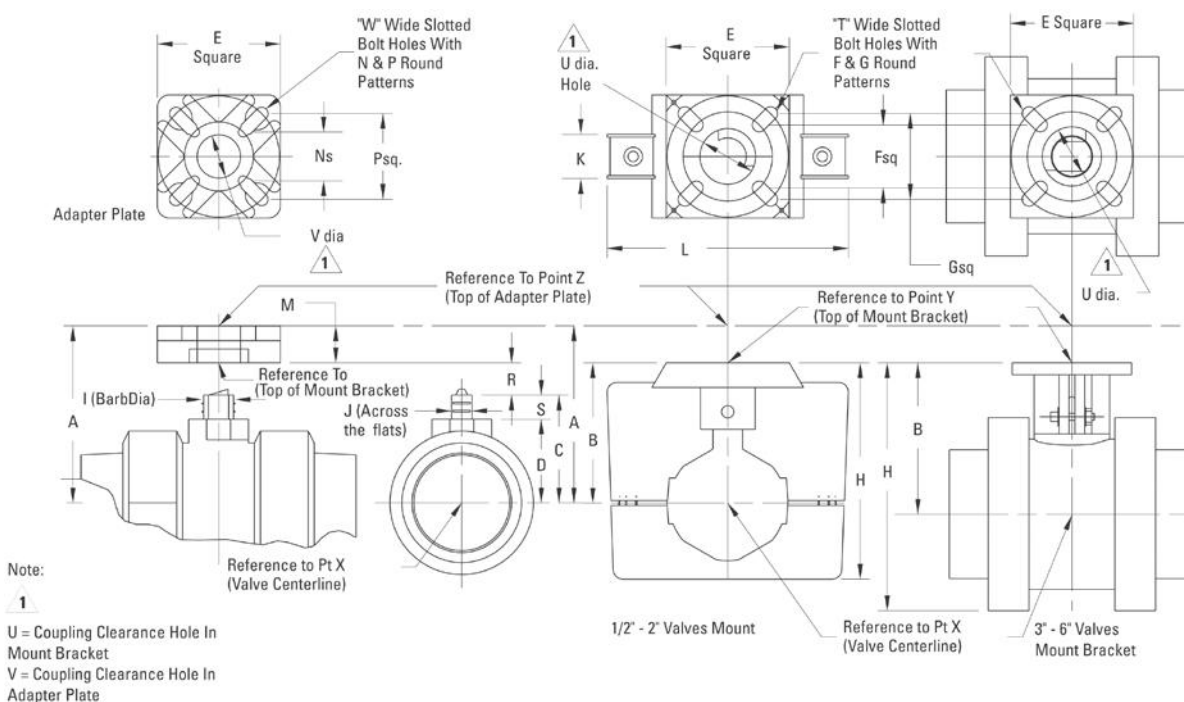

| Valve Size | E | F | | G | | H | I | J | K | L | M | N | | P | | R | S | T | U | V | W |
|---------------|-------|------|-------|------|------|-------|-------|-------|------|------|------|-------|------|-------|------|------|------|------|------|------|------|
| | B. C. | Sq. | B. C. | Sq. | | Dia. | Flats | | | | | B. C. | Sq. | B. C. | Sq. | | | | | | |
| 1/2 | 2.50 | 1.82 | 1.29 | 2.46 | 1.74 | 4.43 | 0.422 | 0.280 | 0.90 | 4.89 | 0.75 | 1.40 | 0.99 | 2.60 | 1.84 | 1.34 | 0.57 | 0.28 | 1.13 | 0.88 | 0.26 |
| 3/4 | 2.50 | 1.82 | 1.29 | 2.46 | 1.74 | 4.43 | 0.613 | 0.450 | 0.90 | 4.89 | 0.75 | 1.40 | 0.99 | 2.60 | 1.84 | 1.00 | 0.34 | 0.28 | 1.13 | 0.88 | 0.26 |
| 1 | 2.50 | 1.82 | 1.29 | 2.46 | 1.74 | 4.43 | 0.613 | 0.450 | 0.90 | 4.89 | 0.75 | 1.40 | 0.99 | 2.60 | 1.84 | 0.71 | 0.46 | 0.28 | 1.13 | 0.88 | 0.26 |
| 1 1/4 / 1 1/2 | 3.00 | 2.46 | 1.74 | 3.02 | 2.14 | 7.22 | 0.738 | 0.535 | 1.26 | 7.32 | 0.75 | 1.40 | 0.99 | 3.02 | 2.14 | 1.49 | 0.55 | 0.34 | 1.64 | 0.88 | 0.32 |
| 2 | 3.00 | 2.46 | 1.74 | 3.02 | 2.14 | 7.22 | 0.988 | 0.755 | 1.26 | 7.32 | 0.75 | 1.40 | 0.99 | 3.02 | 2.14 | 0.75 | 0.68 | 0.34 | 1.64 | 0.88 | 0.32 |
| 3 | 5.00 | 2.74 | 1.94 | 5.16 | 3.65 | 9.59 | 1.240 | 0.900 | — | — | 1.00 | 1.84 | 1.30 | 5.16 | 3.65 | 1.25 | 0.75 | 0.32 | 1.83 | 1.02 | 0.40 |
| 4/6 | 5.00 | 4.20 | 2.97 | 5.16 | 3.65 | 11.74 | 2.090 | 1.260 | — | — | 1.00 | 1.84 | 1.30 | 5.16 | 3.65 | 1.54 | 0.50 | 0.39 | 3.03 | 1.02 | 0.40 |

Actuator Mounting Data


Ball Valve Mount Kit Part Numbers & Coupling Dimensions

| Valve Size | Mount Kit Pt. # | ISO | Non-ISO Mount Block* | Actuator Type ¹ | Drive Coupling Dimensions | | | | | | | | |
|---------------|-----------------|-----|----------------------|----------------------------|---------------------------|------|------|------|------|------|------|------|------|
| | | | | | A | B | C | D | E | F | G | H | J |
| 1/2 | T117002 | F03 | | A/A, A/SR | 0.35 | 0.47 | 2.99 | 1.77 | 0.54 | 0.29 | 0.98 | 0.39 | 0.29 |
| | T116998 | F04 | | E, E/SR | 0.35 | 0.47 | 3.00 | 1.78 | 0.54 | 0.28 | 0.99 | 0.39 | 0.32 |
| 3/4 | T117003 | F03 | | A/A, A/SR | 0.35 | 0.48 | 2.43 | 1.20 | 0.33 | 0.45 | 1.11 | 0.40 | 0.35 |
| | T117009 | F04 | | A/SR, E, E/SR | 0.43 | 0.55 | 2.50 | 1.20 | 0.28 | 0.47 | 1.10 | 0.48 | 0.41 |
| 1 | T117004 | F03 | | A/A | 0.35 | 0.47 | 2.25 | 1.04 | 0.42 | 0.45 | 1.10 | 0.39 | 0.33 |
| | T117010 | F04 | | A/SR, E, E/SR | 0.43 | 0.55 | 2.32 | 1.02 | 0.42 | 0.45 | 1.10 | 0.48 | 0.40 |
| 1 1/4 / 1 1/2 | T117005 | F03 | | A/A | 0.35 | 0.47 | 3.15 | 1.93 | 0.52 | 0.55 | 1.38 | 0.40 | 0.33 |
| | T117011 | F04 | | A/SR, E, E/SR | 0.43 | 0.55 | 3.22 | 1.93 | 0.52 | 0.54 | 1.38 | 0.48 | 0.40 |
| 2 | T117006 | F04 | | A/A, E, E/SR | 0.43 | 0.55 | 2.59 | 1.19 | 0.65 | 0.76 | 1.50 | 0.48 | 0.42 |
| | T117012 | F05 | T117584 | A/SR | 0.55 | 0.71 | 2.74 | 1.18 | 0.65 | 0.76 | 1.50 | 0.62 | 0.56 |
| 3 | T117007 | F05 | T117584 | A/A, E/SR | 0.55 | 0.71 | 3.58 | 1.78 | 0.74 | 0.92 | 1.73 | 0.63 | 0.60 |
| | T117013 | F07 | T117586 | A/SR, E | 0.67 | 0.87 | 2.70 | 1.73 | 0.73 | 0.92 | 1.73 | 0.76 | 0.70 |
| 4/6 | T117008 | F05 | T117584 | A/A, E/SR | 0.55 | 0.71 | 3.56 | 1.66 | 0.46 | 1.27 | 2.75 | 0.64 | 0.60 |
| | T117014 | F07 | T117586 | A/SR, E | 0.67 | 0.87 | 3.68 | 1.66 | 0.47 | 1.27 | 2.75 | 0.76 | 0.76 |


¹ A/A = Pneumatic Air to Air. A/SR = Pneumatic Air to Spring Return (fail-safe). E = Electric (motor driven). E/SR = Electric to Spring Return.

* Non-ISO Mount Block is required to attach NIBCO actuator to ISO pattern mount kit. Mount Kits and Non-ISO Mount Blocks are required for NIBCO actuators where listed above.


Model B

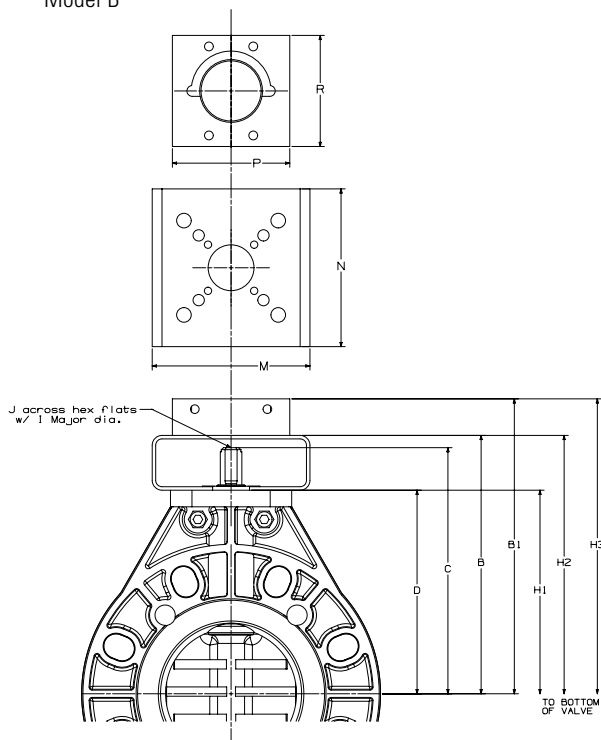

Model C with Bracket

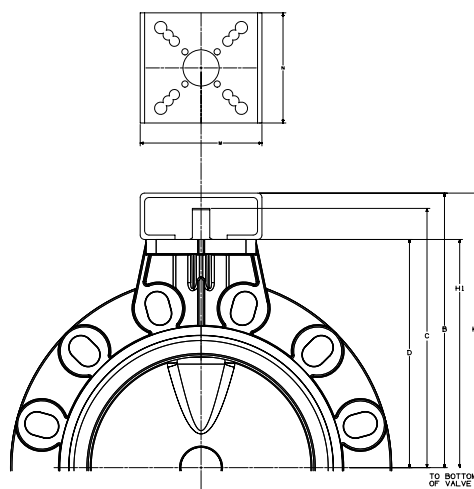

Model C with Direct Mount

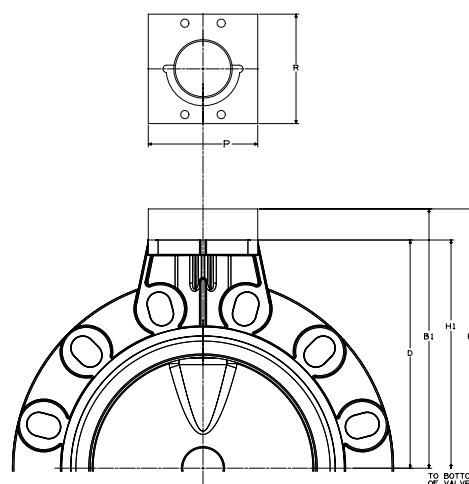

Actuator Mounting Data

Butterfly Valve Mounting & Dimensions and Mount Kit Part Numbers

| Valve Model | Valve Size | Bracket Mount Pt. # | Non-ISO* Mount Block | ISO Actuator Type | Basic Valve Dimensions | | | | | | Bracket Mount Dimensions | | | | | ISO Block Dimensions | | | | |
|-------------|------------|---------------------|----------------------|-------------------|------------------------|------|-------|-------|------|--------------|--------------------------|--------------|----------------|-------|-------|--------------------------|--------------|----------|-------|-------|
| | | | | | C | D | I | J | S | Valve OAH H1 | B w/ Bracket | Valve OAH H2 | Bracket Height | M | N | B1 w/ Bracket & Mount H3 | Valve OAH H3 | Height P | R | |
| Model B | 3 | T115706 | T117584 | A/A | 6.00 | 4.75 | 0.51 | 0.44 | 1.13 | 8.63 | 6.40 | 10.28 | 1.65 | 4.75 | 4.75 | 17.56 | 11.16 | 0.885 | 3.18 | 3.17 |
| | | T115709 | T117587 | A/SR | | | | | | | 6.40 | 1.65 | 1.65 | 4.75 | 4.75 | 9.39 | 2.99 | 1.335 | 4.717 | 4.718 |
| | 4 | T115712 | T117585 | A/A | 7.35 | 6.13 | 0.65 | 0.56 | 1.10 | 10.75 | 7.78 | 12.40 | 1.65 | 4.75 | 4.75 | 8.73 | 13.35 | 0.945 | 3.145 | 3.150 |
| | | T115715 | T117587 | A/SR | | | | | | | 7.78 | 1.65 | 1.65 | 4.75 | 4.75 | 9.12 | 2.99 | 1.335 | 4.717 | 4.718 |
| | | T115712 | | F07 E | | | | | | | 7.78 | 1.65 | 1.65 | 4.75 | 4.75 | | | | | |
| | 6 | T115721 | T117587 | A/A | 9.12 | 7.50 | 1.01 | 0.88 | 1.50 | 13.04 | 10.08 | 15.62 | 2.58 | 4.75 | 4.75 | 11.42 | 16.95 | 1.335 | 4.717 | 4.718 |
| | | T115724 | T117588 | A/SR | | | | | | | 10.08 | 2.58 | 2.58 | 4.75 | 4.75 | 11.64 | 4.14 | 1.555 | 5.500 | 5.110 |
| Model C | 2 | T116819 | | F04 A/A, E, E/SR | 5.31 | 3.94 | 0.50 | 0.373 | 1.37 | 7.21 | 5.57 | 8.84 | 1.63 | 3.466 | 3.250 | | | | | |
| | | | T117568 | A/SR | | | | | | | | | | | | 4.80 | 8.07 | 0.860 | 3.140 | 3.140 |
| | 2 1/2 | T116819 | | F04 A/A, E | 5.41 | 4.13 | 0.50 | 0.373 | 1.28 | 7.80 | 5.76 | 9.43 | 1.63 | 3.466 | 3.250 | | | | | |
| | | | T117583 | A/SR | | | | | | | | | | | | 5.07 | 8.74 | 0.942 | 3.148 | 3.148 |
| | | T116818 | | F04 E/SR | | | | | | | 5.76 | 9.43 | 1.63 | 3.466 | 3.250 | | | | | |
| | 3 | | T117568 | A/A | 5.62 | 4.41 | 0.50 | 0.373 | 1.21 | 8.37 | | | | | | 5.27 | 9.23 | 0.860 | 3.140 | 3.140 |
| | | | T117569 | A/SR | | | | | | | | | | | | 5.51 | 9.47 | 1.100 | 3.346 | 3.535 |
| | | T116819 | | F04 E | | | | | | | 6.04 | 10.00 | 1.63 | 3.466 | 3.250 | | | | | |
| | | T116818 | | F04 E/SR | | | | | | | 6.04 | 10.00 | 1.63 | 3.466 | 3.250 | | | | | |
| | 4 | | T117554 | A/A | 6.56 | 5.30 | 0.656 | 0.498 | 1.26 | 9.86 | | | | | | 6.17 | 10.73 | 0.868 | 3.146 | 3.146 |
| | | | T117559 | A/SR | | | | | | | | | | | | 6.40 | 10.96 | 1.101 | 3.345 | 3.535 |
| | | T116820 | | F04 E | | | | | | | 6.93 | 11.49 | 1.63 | 3.466 | 3.250 | | | | | |
| | | T116826 | | F05 E/SR | | | | | | | 6.93 | 11.49 | 1.63 | 3.466 | 3.250 | | | | | |
| | 6 | | T117560 | A/A | 8.37 | 7.09 | 0.781 | 0.562 | 1.28 | 12.82 | | | | | | 8.19 | 13.92 | 1.103 | 3.350 | 3.540 |
| | | | T117572 | A/SR | | | | | | | | | | | | 8.65 | 14.38 | 1.560 | 5.112 | 5.507 |
| | | T116830 | | F07 E | | | | | | | 8.72 | 14.45 | 1.63 | 3.466 | 3.250 | | | | | |
| | 8 | | T117562 | A/A | 9.35 | 7.99 | 0.781 | 0.562 | 1.36 | 14.94 | | | | | | 9.33 | 16.28 | 1.336 | 4.724 | 4.724 |
| | | | T117572 | A/SR | | | | | | | | | | | | 9.55 | 16.50 | 1.560 | 5.112 | 5.507 |
| | | T111400 | | E | | | | | | | 9.99 | 16.94 | 2.00 | 4.53 | 4.75 | | | | | |
| | 10 | | T117564 | A/A | 11.18 | 9.84 | 1.06 | 0.750 | 1.34 | 18.18 | | | | | | 11.18 | 19.52 | 1.340 | 4.720 | 4.720 |
| | | | T117579 | A/SR | | | | | | | | | | | | 11.18 | 19.52 | 1.340 | 4.720 | 4.720 |
| | | T111397 | | E | | | | | | | 11.84 | 20.18 | 2.00 | 5.25 | 4.75 | | | | | |

¹A/A = Pneumatic Air to Air. A/SR = Pneumatic Air to Spring Return (fail-safe). E = Electric (motor driven). E/SR=Electric to Spring Return.

* Non-ISO Mount Block is required to attach NIBCO actuator to ISO pattern mount kit. Mount Kits and Non-ISO Mount Blocks are required for NIBCO actuators where listed above.

Butterfly Valve Mount Bracket Dimensions

| Valve Model | Valve Size | D | B | Bracket Height | Actuator Type |
|-------------|------------|------|-------|----------------|---------------|
| Model B | 3 | 4.75 | 6.4 | 1.65 | |
| | 4 | 6.13 | 7.78 | 1.65 | |
| | 6 | 7.5 | 10.08 | 2.58 | |
| Model C | 2 | 3.94 | 5.57 | 1.63 | |
| | 2.5 | 4.13 | 5.76 | 1.63 | |
| | 3 | 4.43 | 6.06 | 1.63 | |
| | 4 | 5.31 | 6.94 | 1.63 | |
| | 6 | 7.09 | 9.09 | 2 | A/A, A/SR |
| | | | 8.72 | 1.63 | E |
| | 8 | 8 | 10 | 2 | |
| | 10 | 9.84 | 11.84 | 2 | A/A, E |
| | | | 11.97 | 2.13 | A/SR |

¹A/A = Pneumatic Air to Air. A/SR = Pneumatic Air to Spring Return (fail-safe). E = Electric (motor driven).

Model C Butterfly Valve Operating Stem Torque IN-LBS

| Valve Size NPS | 50 PSIG | | 100 PSIG | | 150 PSIG | |
|----------------|---------|-------|----------|-------|----------|-------|
| | CLOSE | OPEN | CLOSE | OPEN | CLOSE | OPEN |
| 2 | 48 | 44.4 | 56.4 | 63.6 | 36 | 63.6 |
| 2.5 | 44.4 | 48 | 51.6 | 60 | 56.4 | 60 |
| 3 | 51.6 | 39.6 | 60 | 48 | 72 | 60 |
| 4 | 120 | 120 | 152.4 | 128.4 | 180 | 135.6 |
| 6 | 236.4 | 123.6 | 248.4 | 171.6 | 327.6 | 188.4 |
| 8 | 204 | 171.6 | 248.4 | 180 | 348 | 219.6 |
| 10 | 951.6 | 332.4 | 1098 | 558 | 1164 | 681.6 |

WARNING: DO NOT USE OR TEST THE PRODUCTS IN THIS CATALOG WITH COMPRESSED AIR OR OTHER GASES. FAILURE TO FOLLOW THIS WARNING CAN RESULT IN PERSONAL INJURY OR DAMAGE TO PROPERTY.

Revision 1/2/2018

Metric Equivalent Charts

Linear Conversion Table From Fractional Inches to Millimeters

| inches | | mm | inches | | mm |
|--------|------|--------|--------|-------|--------|
| 1/64 | .016 | .397 | 33/64 | .516 | 13.097 |
| 1/32 | .031 | .794 | 17/32 | .531 | 13.494 |
| 3/64 | .047 | 1.191 | 35/64 | .547 | 13.891 |
| 1/16 | .063 | 1.588 | 9/16 | .563 | 14.288 |
| 5/64 | .078 | 1.984 | 37/64 | .578 | 14.684 |
| 3/32 | .094 | 2.381 | 19/32 | .594 | 15.081 |
| 7/64 | .109 | 2.778 | 39/64 | .609 | 15.478 |
| 1/8 | .125 | 3.175 | 5/8 | .625 | 15.875 |
| 9/64 | .141 | 3.572 | 41/64 | .641 | 16.272 |
| 5/32 | .156 | 3.969 | 21/32 | .656 | 16.669 |
| 11/64 | .172 | 4.366 | 43/64 | .672 | 17.066 |
| 3/16 | .188 | 4.763 | 11/16 | .688 | 17.463 |
| 13/64 | .203 | 5.159 | 45/64 | .703 | 17.859 |
| 7/32 | .219 | 5.556 | 23/32 | .719 | 18.256 |
| 15/64 | .234 | 5.953 | 47/64 | .734 | 18.653 |
| 1/4 | .250 | 6.350 | 3/4 | .750 | 19.050 |
| 17/64 | .266 | 6.747 | 49/64 | .766 | 19.447 |
| 9/32 | .281 | 7.144 | 25/32 | .781 | 19.844 |
| 19/64 | .297 | 7.541 | 51/64 | .797 | 20.241 |
| 5/16 | .313 | 7.938 | 13/16 | .813 | 20.638 |
| 21/64 | .328 | 8.334 | 53/64 | .828 | 21.034 |
| 11/32 | .344 | 8.731 | 27/32 | .844 | 21.431 |
| 23/64 | .359 | 9.128 | 55/64 | .859 | 21.828 |
| 3/8 | .375 | 9.525 | 7/8 | .875 | 22.225 |
| 25/64 | .391 | 9.922 | 57/64 | .891 | 22.622 |
| 13/32 | .406 | 10.319 | 29/32 | .906 | 23.019 |
| 27/64 | .422 | 10.716 | 59/64 | .922 | 23.416 |
| 7/16 | .438 | 11.113 | 15/16 | .938 | 23.813 |
| 29/64 | .453 | 11.509 | 61/64 | .953 | 24.209 |
| 15/32 | .469 | 11.906 | 31/32 | .969 | 24.606 |
| 31/64 | .484 | 12.303 | 63/64 | .984 | 25.003 |
| 1/2 | .500 | 12.700 | 1 | 1.000 | 25.400 |

1 inch = 25.4 millimeters

English to Metric Conversion Table

| Units | Change to | Multiply by |
|--------------|-----------------|-------------|
| Inches | Millimeters | 25.40 |
| Inches | Centimeters | 2.54 |
| Inches | Meters | .0254 |
| Feet | Meters | .3048 |
| Miles | Kilometers | 1.609347 |
| Sq. Inches | Sq. Centimeters | 6.452 |
| Sq. Feet | Sq. Meters | .0929 |
| Cu. Inches | Cu. Centimeters | 16.3872 |
| Cu. Feet | Cu. Meters | .02832 |
| U.S. Gallons | Liters | 3.7854 |
| Pounds | Kilograms | .45359 |

Metric to English Conversion Table

| Units | Change to | Multiply by |
|-----------------|--------------|-------------|
| Millimeters | Inches | .03937 |
| Centimeters | Inches | .39371 |
| Meters | Inches | 39.371 |
| Meters | Feet | 3.281 |
| Kilometers | Miles | .62137 |
| Sq. Centimeters | Sq. Inches | .1550 |
| Sq. Meters | Sq. Feet | 10.7649 |
| Cu. Centimeters | Cu. Inches | .061 |
| Cu. Meters | Cu. Feet | 35.314 |
| Liters | U.S. Gallons | .26417 |
| Kilograms | Pounds | 2.20462 |

Physical Properties
of Thermoplastic Piping Materials

| ASTM Test Methods | Properties | Material | | | |
|----------------------|--------------------------------------|----------------|-----------------|------|---------------|
| | | PVC 12454-B | CPVC 23447-B | PVDF | Polypropylene |
| General | | | | | |
| D792 | Specific Gravity | 1.38 | 1.50 | 1.76 | .905 |
| D570 | Water Absorption % 24 Hrs. @ 73°F | .05 | .05 | .04 | .02 |

Mechanical

| | | | | | |
|------|---|--------|--------|-------|-------|
| D638 | Tensile Strength psi @ 73°F | 7,300 | 7,200 | 6,000 | 4,600 |
| D638 | Modulus of Elasticity in Tension psi @ 73°F x 10 ⁵ | 4.2 | 3.7 | 2.1 | 2.0 |
| D790 | Flexural Strength psi | 14,500 | 15,600 | 9,700 | 7,000 |
| D256 | Izod Impact Strength @ 73°F (Notched) | 1.1 | 2.0 | 3.8 | .8 |

Thermal

| | | | | | |
|------|--|-----|-----|-----|-----|
| D696 | Coefficient of Thermal Expansion in/in/°F x 10 ⁻⁵ | 3.0 | 3.8 | 7.9 | 5.0 |
| C177 | Thermal Conductivity BTU/HR/Sq. Ft./°F/in | 1.2 | .95 | .79 | 1.2 |
| D648 | Heat Distortion Temp. °F @ 66 psi | NA | NA | 284 | 195 |
| D648 | Heat Distortion Temp. °F @ 264 psi | 163 | 212 | 194 | 140 |
| | Resistance to Heat °F at Continuous Drainage | 140 | 210 | 280 | 180 |

Flammability

| | | | | | |
|-------|--------------------------------------|-------|-------|-------|-------|
| D2863 | Limiting Oxygen Index (%) | 43 | 60 | 44 | 17 |
| E84 | Flame Spread | < 25 | < 25 | < 25 | NA |
| E84 | Smoke Generation | > 250 | < 250 | < 50 | > 450 |
| | Underwriters Lab Rating (Sub. 94) | 94V-0 | 94V-0 | 94V-0 | 94HB |

Dimensions and Reference







Pipe¹ 20 ft. Lengths

| Nominal Pipe Size | Approximate Weight per 100 ft. | | | | Nom. Outside Diameter (In.) | Nom. Inside Diameter (In.) | Wall Thickness (in.) | | Cross-sectional Area (in. ²) | Internal Area (in. ²) | Fluid Capacity (gal/100ft.) | Outside Surf. Area (ft ² /100ft) | Threshold Flow ² (GPM) |
|-------------------|--------------------------------|-------|---------------|-------|-----------------------------|----------------------------|----------------------|------|--|-----------------------------------|-----------------------------|---|-----------------------------------|
| | PVC | CPVC | Polypropylene | PVDF | | | Nom. | Min. | | | | | |
| 1/4 | 10.1 | 11.9 | — | — | .540 | .282 | .129 | .119 | .167 | .062 | .32 | 14.14 | .97 |
| 1/2 | 20.5 | 24.3 | 14.4 | 25.6 | .840 | .526 | .157 | .147 | .337 | .217 | 1.13 | 21.99 | 3.39 |
| 3/4 | 27.8 | 32.9 | 18.0 | 36.0 | 1.050 | .722 | .164 | .154 | .457 | .409 | 2.13 | 27.49 | 6.38 |
| 1 | 40.4 | 48.5 | 26.1 | 53.1 | 1.315 | .936 | .1895 | .179 | .670 | .688 | 3.57 | 34.43 | 10.72 |
| 1 1/4 | 56.7 | 66.9 | 35.9 | — | 1.660 | 1.255 | .2025 | .191 | .927 | 1.237 | 6.43 | 43.46 | 19.28 |
| 1 1/2 | 68.9 | 81.1 | 45.6 | 85.2 | 1.900 | 1.476 | .212 | .200 | 1.124 | 1.711 | 8.89 | 49.74 | 26.67 |
| 2 | 94.9 | 108.5 | 64.8 | 121.1 | 2.375 | 1.913 | .231 | .218 | 1.556 | 2.874 | 14.93 | 62.18 | 44.79 |
| 2 1/2 | 144.9 | 165.4 | — | — | 2.875 | 2.290 | .2925 | .276 | 2.373 | 4.119 | 21.40 | 75.27 | 64.19 |
| 3 | 193.8 | 221.3 | 128.1 | 241.9 | 3.500 | 2.864 | .318 | .300 | 3.179 | 6.442 | 33.47 | 91.63 | 100.40 |
| 4 | 283.3 | 323.4 | 180.5 | 353.5 | 4.500 | 3.786 | .357 | .337 | 4.647 | 11.258 | 58.48 | 117.81 | 175.44 |
| 6 | 541.1 | 616.8 | 346.0 | 675.1 | 6.625 | 5.709 | .458 | .432 | 8.873 | 25.598 | 132.98 | 173.44 | 398.93 |
| 8 | 821.9 | 905.8 | — | — | 8.625 | 7.565 | .530 | .500 | 13.479 | 44.948 | 233.49 | 225.80 | 700.48 |
| 10 | 1227.7 | — | — | — | 10.750 | 9.493 | .6285 | .593 | 19.985 | 70.778 | 367.68 | 281.43 | 1103.02 |
| 12 | 1710.4 | — | — | — | 12.750 | 11.294 | .726 | .687 | 27.495 | 100.181 | 520.79 | 333.79 | 1562.36 |

1 Dimensions shown are listed in ASTM D1785 and F441 for PVC and CPVC Schedule 80 plastic pipe, respectively.

2 Upper threshold rate of flow = 5 ft./sec. fluid velocity.



Fittings¹

| Size | IPS Dia | Solvent Socket (S) | | | Female Threads (FPT) | | Male Threads (MPT) | Male End (SPG) | | Wall Thickness | |
|-------|---------|--------------------|----------------|--------------------|----------------------|--------------------|--------------------|----------------|---------------------|--------------------|--------------------|
| | | A ³ | B ³ | C ⁴ Nom | Y ² | M ⁵ Min | | X | Cm ⁴ Nom | F ⁴ Min | E ⁴ Min |
| 1/4 | .540 | .552 | .536 | .640 | .311 | .840 | .311 | .540 | .655 | .149 | .119 |
| 1/2 | .840 | .848 | .836 | .890 | .427 | 1.280 | .427 | .840 | .905 | .185 | .147 |
| 3/4 | 1.050 | 1.058 | 1.046 | 1.015 | .446 | 1.500 | .446 | 1.050 | 1.030 | .195 | .154 |
| 1 | 1.315 | 1.325 | 1.310 | 1.140 | .530 | 1.810 | .530 | 1.315 | 1.155 | .225 | .179 |
| 1 1/4 | 1.660 | 1.670 | 1.655 | 1.265 | .550 | 2.200 | .550 | 1.660 | 1.280 | .240 | .191 |
| 1 1/2 | 1.900 | 1.912 | 1.894 | 1.390 | .550 | 2.500 | .550 | 1.900 | 1.405 | .250 | .200 |
| 2 | 2.375 | 2.387 | 2.369 | 1.515 | .566 | 2.375 | .566 | 2.375 | 1.530 | .275 | .218 |
| 2 1/2 | 2.875 | 2.889 | 2.868 | 1.780 | .870 | 3.560 | .870 | 2.875 | 1.810 | .345 | .276 |
| 3 | 3.500 | 3.516 | 3.492 | 1.905 | .954 | 4.300 | .954 | 3.500 | 1.933 | .375 | .300 |
| 4 | 4.500 | 4.518 | 4.491 | 2.280 | 1.032 | 5.430 | 1.032 | 4.500 | 2.310 | .420 | .337 |
| 6 | 6.625 | 6.647 | 6.614 | 3.030 | — | — | — | 6.625 | 3.060 | .540 | .432 |
| 8 | 8.625 | 8.655 | 8.610 | 4.500 | — | — | — | 8.625 | 4.590 | .625 | .500 |
| 10 | 10.750 | 10.780 | 10.735 | 5.500 | — | — | — | 10.750 | 5.590 | .741 | .593 |
| 12 | 12.750 | 12.780 | 12.735 | 6.500 | — | — | — | 12.750 | 6.590 | .859 | .687 |

1 With exception of thread lengths, dimensions shown are listed in ASTM D2467 and F439 for PVC and CPVC socket-type Schedule 80 fittings, respectively.

2 Dimensions shown are typical male component engagement, hand-tight (L, in ASME B1.20.1 thread spec.) plus 1 1/2 turns lightening.

3 Dimensions shown are not applicable for polypropylene or PVDF. Socket diameters in these materials are designed for Chemtrol® thermo-seal socket fusion joining.

4 Chemtrol® fittings may exceed certain minimum ASTM dimensional requirements in order to ensure functional satisfaction.

5 Dimensions are listed in ASTM D2464 and F437 for PVC and CPVC threaded Schedule 80 fittings, respectively.


WARNING: DO NOT USE OR TEST THE PRODUCTS IN THIS CATALOG WITH COMPRESSED AIR OR OTHER GASES. FAILURE TO FOLLOW THIS WARNING CAN RESULT IN PERSONAL INJURY OR DAMAGE TO PROPERTY.

Revision 1/2/2018

Dimensions and References

National (American) Standard Taper Pipe Thread, NPT (excerpt from ASME B1.20.1)

| Nominal Size | Outside Diameter D | Number of Threads Per Inch n | Pitch of Thread p | Normal Engagement By Hand L ₁ | Length of Effective Thread L ₂ | Wrench Makeup Length for Internal Thread L ₃ | Total Length: End of Pipe to Vanish Point L ₄ | Pitch Diameter at Beginning of External Thread E ₀ | Pitch Diameter at Beginning of Internal Thread E ₁ | Height of Thread (Max.) h |
|--------------|--------------------|------------------------------|-------------------|--|---|---|--|---|---|---------------------------|
| in. | in. | | in. | in. | in. | in. | in. | in. | in. | in. |
| 1/4 | 0.540 | 18 | .05556 | .228 | .4018 | .1667 | .5946 | .47739 | .49163 | .04444 |
| 1/2 | 0.840 | 14 | .07143 | .320 | .5337 | .2143 | .7815 | .75843 | .77843 | .05714 |
| 3/4 | 1.050 | 14 | .07143 | .339 | .5457 | .2143 | .7935 | .96768 | .98887 | .05714 |
| 1 | 1.315 | 11 1/2 | .08696 | .400 | .6828 | .2609 | .9845 | 1.21363 | 1.23863 | .06957 |
| 1 1/4 | 1.660 | 11 1/2 | .08696 | .420 | .7068 | .2609 | 1.0085 | 1.55713 | 1.58338 | .06957 |
| 1 1/2 | 1.900 | 11 1/2 | .08696 | .420 | .7235 | .2609 | 1.0252 | 1.79609 | 1.82234 | .06957 |
| 2 | 2.375 | 11 1/2 | .08696 | .436 | .7565 | .2609 | 1.0582 | 2.26902 | 2.29627 | .06957 |
| 2 1/2 | 2.875 | 8 | .12500 | .682 | 1.1375 | .2500 | 1.5712 | 2.71953 | 2.76216 | .10000 |
| 3 | 3.500 | 8 | .12500 | .766 | 1.2000 | .2500 | 1.6337 | 3.34062 | 3.38850 | .10000 |
| 4 | 4.500 | 8 | .12500 | .844 | 1.3000 | .2500 | 1.7337 | 4.33438 | 4.38712 | .10000 |

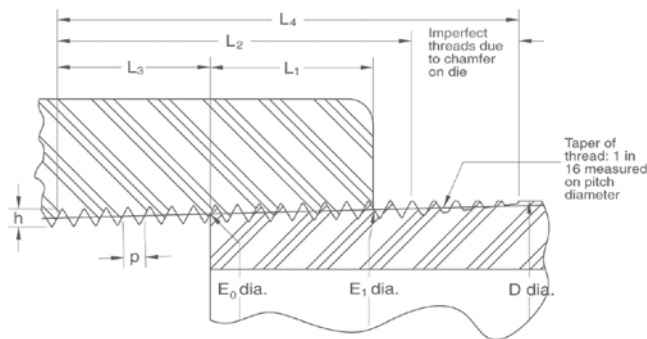

Do not thread Schedule 40 pipe.

Pressure Factors

Pressure measurements are based on the standardized weight of water expressed in a variety of English and metric units.

| | | | |
|---|---|-------------|--|
| 1 psig (gauge) | = | 2.3068 | foot of water head |
| | = | 2.036 | inch of mercury head |
| | = | 0.0689 | bar |
| | = | 0.0703 | kgm/cm ² (kilograms/centimeter ²) |
| | = | 6894.757 | N/m ² (newton/meter ²) |
| | = | 6.8948 | kPa (kilopascal) |
| 1 foot of water | = | 0.4335 | psig |
| | = | 0.0305 | kgm/cm ² (kilograms/centimeter ²) |
| | = | 2988.8837 | N/m ² (newton/meter ²) |
| | = | 0.33457 | kPa (kilopascal) |
| | = | 0.02989 | bar |
| 1 bar | = | 100000.0 | N/m ² (newton/meter ²) |
| | = | 14.50377 | psig |
| | = | 100.0 | kPa (kilopascal) |
| | = | 10197.1621 | kgm/cm ² (kilograms/centimeter ²) |
| | = | 33.456 | foot of water head |
| 1 N/m ² (newton/meter ²) | = | 1.0 | Pa (pascal) = 0.001 kPa (kilopascal) |
| | = | 0.000010197 | kgm/cm ² |
| | = | 0.000145 | psig (gauge) |
| 1 kilogram/centimeter ² | = | 98066.5 | N/m ² (newton/meter ²) |
| | = | 14.2233 | psig |

ANSI B16.5 Dimensional Data – Flanges and Flanged Fittings

| Dimensions† | Drilling | | | | |
|-------------------------|------------------------|-----------------|------------------------|---------------------|-------------------------------|
| Nominal Pipe Size (In.) | Outside Diameter (In.) | Number of Holes | Diameter of Bolt (In.) | Minimum Bolt Length | Diameter of Bolt Circle (In.) |
| 1/2 | 3.50 | 4 | 1/2 | 2 | 2.38 |
| 3/4 | 3.88 | 4 | 1/2 | 2 | 2.75 |
| 1 | 4.25 | 4 | 1/2 | 2 1/4 | 3.12 |
| 1 1/4 | 4.62 | 4 | 1/2 | 2 1/4 | 3.50 |
| 1 1/2 | 5.00 | 4 | 1/2 | 2 1/2 | 3.88 |
| 2 | 6.00 | 4 | 5/8 | 2 3/4 | 4.75 |
| 2 1/2 | 7.00 | 4 | 5/8 | 3 | 5.50 |
| 3 | 7.50 | 4 | 5/8 | 3 1/4 | 6.00 |
| 4 | 9.00 | 8 | 5/8 | 3 1/2 | 7.50 |
| 6 | 11.00 | 8 | 3/4 | 3 3/4 | 9.50 |
| 8 | 13.50 | 8 | 3/4 | 4 | 11.75 |
| 10 | 16.00 | 12 | 7/8 | 4 3/4 | 14.25 |
| 12 | 19.00 | 12 | 7/8 | 4 1/2 | 17.00 |

† Dimensions and bolts conform to ANSI B16.5 for 150 lb. steel flanges. Bolt holes are 1/8" larger in diameter than the required bolts.

Vacuum Factors

Vacuum pressure is the difference between the atmospheric pressure and the absolute pressure.

| | | | |
|---------------------|---|-------------|--|
| 1 Std. Atmosphere | = | 14.6959 | psia (absolute) |
| | = | 760.0 | mm (millimeter) of mercury head |
| | = | 1.0332276 | kgm/cm ² (kilograms/centimeter ²) |
| | = | 1.01325 | bar |
| | = | 101.325 | kPa (kilopascal) |
| 1 mm | = | 0.03937 | inch |
| 1 micron of mercury | = | 0.001 | mm (millimeter) of mercury head |
| | = | 0.000019336 | psig (gauge) |
| 1 mm of mercury | = | 1000.0 | micron of mercury head |
| 1 inch | = | 25.4 | mm (millimeter) |
| 1 inch of mercury | = | 25400.0 | micron of mercury head |
| | = | 0.4912 | psig |
| 1 inch of water | = | 0.0361 | psig |
| | = | 1868.2742 | micron of mercury head |
| 1 psig (gauge) | = | 27.6817 | inch of water head |

Pressure Ratings of Chemtrol Products

Pipe and Fittings

In order to determine the pressure rating for product system, first find the plastic material and schedule (wall thickness—see Reference Data—Schedule 80 components for additional information) of pipe and fittings in the heading of the Maximum Nonshock Operating Pressure table below. Then, locate the selected joining method in the subheading of the table and go down the column to the value across from a particular pipe size, listed in the far left column. This will be the maximum non-shock operating pressure at 73° F for the defined product system.

Maximum Nonshock Operating Pressure (psi) at 73° F¹

| Nom. Pipe Size | Schedule | | | | | | | |
|----------------|------------|------------------------|---------------|-------------------|------------------------------|-------------------|-----------------|--|
| | 40 | | Schedule 80 | | Schedule 80 | | Schedule 80 | |
| | PVC & CPVC | Schedule 80 PVC & CPVC | Polypropylene | | Thermo-Threaded ³ | | Thermo-Threaded | |
| | Socket End | Socket End | Threaded End | Thermo-Seal Joint | Threaded ³ End | Thermo-Seal Joint | Threaded End | |
| 1/2 | 600 | 850 | 420 | 410 | 20 | 580 | 290 | |
| 3/4 | 480 | 690 | 340 | 330 | 20 | 470 | 230 | |
| 1 | 450 | 630 | 320 | 310 | 20 | 430 | 210 | |
| 1 1/4 | 370 | 520 | 260 | 260 | 20 | ----- | ----- | |
| 1 1/2 | 330 | 470 | 240 | 230 | 20 | 326 | 160 | |
| 2 | 280 | 400 | 200 | 200 | 20 | 270 | 140 | |
| 2 1/2 | 300 | 420 | 210 | ----- | ----- | ----- | ----- | |
| 3 | 260 | 370 | 190 | 190 | 20 | 250 | N.R. | |
| 4 | 220 | 320 | 160 | 160 | 20 | 220 | N.R. | |
| 6 | 180 | 280 | N.R. | 140 | N.R. | 190 | N.R. | |
| 8 | 160 | 250 ² | N.R. | ----- | ----- | ----- | ----- | |
| 10 | 140 | 230 | N.R. | ----- | ----- | ----- | ----- | |
| 12 | 130 | 230 | N.R. | ----- | ----- | ----- | ----- | |

1 For more severe service, an additional correction factor may be required.

2 8" CPVC tee, 90 elbow and 45 elbow derated to half of maximum pressure.

3 Recommended for intermittent drainage pressure not exceeding 20 psi.

Not available in natural polypropylene.

N.R. Not Recommended and NOT WARRANTED by manufacturer.

As implied by the preceding, the pressure for all thermoplastic piping is a function of temperature. For pipe and fitting applications above 73° F, refer to the table at the top of the next column for the Temperature Correction Factors. To determine the maximum non-shock pressure rating at an elevated temperature, simply multiply the base pressure rating obtained from the upper table by the correction factor from the upper table in the next column. Below 73° F the pressure rating will be the same as the base pressure in the table above.

Temperature Correction Factors


| Operating Temperature (° F) | Factors PVC | CPVC | PP | PVDF |
|-----------------------------|-------------|------|------|------|
| 70 | 1.00 | 1.00 | 1.00 | 1.00 |
| 80 | 0.90 | 0.96 | 0.97 | 0.95 |
| 90 | 0.75 | 0.92 | 0.91 | 0.87 |
| 100 | 0.62 | 0.85 | 0.85 | 0.80 |
| 110 | 0.50 | 0.77 | 0.80 | 0.75 |
| 115 | 0.45 | 0.74 | 0.77 | 0.71 |
| 120 | 0.40 | 0.70 | 0.75 | 0.68 |
| 125 | 0.35 | 0.66 | 0.71 | 0.66 |
| 130 | 0.30 | 0.62 | 0.68 | 0.62 |
| 140 | 0.22 | 0.55 | 0.65 | 0.58 |
| 150 | N.R. | 0.47 | 0.57 | 0.52 |
| 160 | N.R. | 0.40 | 0.50 | 0.49 |
| 170 | N.R. | 0.32 | 0.26 | 0.45 |
| 180 | N.R. | 0.25 | * | 0.42 |
| 200 | N.R. | 0.18 | N.R. | 0.36 |
| 210 | N.R. | 0.15 | N.R. | 0.33 |
| 240 | N.R. | N.R. | N.R. | 0.25 |
| 280 | N.R. | N.R. | N.R. | 0.18 |

* Recommended for intermittent drainage pressure not exceeding 20 psi.

N.R. Not Recommended and NOT WARRANTED by manufacturer.

Temperature Conversion

$$F = C \times 1.8 + 32 \quad C = (F - 32) \div 1.8$$



* Formerly known as Centigrade

Pressure Ratings of Chemtrol Products

Unions and Flanges

As with all other thermoplastic piping components, the maximum pressure rating for all Chemtrol® unions and flanges, regardless of size, is related to temperature as per the chart below.

Maximum Non-Shock Operating Pressure (psi) vs. Temperature

| Operating Temperature (° F) | Unions & Flanges | | | |
|-----------------------------|------------------|------|------|------|
| | PVC | CPVC | PP | PVDF |
| 70 | 150 | 150 | 150 | 150 |
| 80 | 150 | 150 | 150 | 150 |
| 90 | 150 | 150 | 150 | 150 |
| 100 | 150 | 150 | 150 | 150 |
| 110 | 135 | 140 | 140 | 150 |
| 120 | 125 | 130 | 130 | 150 |
| 130 | 110 | 120 | 118 | 150 |
| 140 | 50 | 110 | 105 | 150 |
| 150 | N.R. | 100 | 93 | 140 |
| 160 | N.R. | 90 | 80 | 133 |
| 170 | N.R. | 80 | 70 | 125 |
| 180 | N.R. | 70 | 50 | 115 |
| 200 | N.R. | 50 | N.R. | 97 |
| 210 | N.R. | 25 | N.R. | 85 |
| 220 | N.R. | N.R. | N.R. | 75 |
| 240 | N.R. | N.R. | N.R. | 55 |
| 260 | N.R. | N.R. | N.R. | 40 |
| 280 | N.R. | N.R. | N.R. | 25 |

N.R. Not Recommended and NOT WARRANTED by manufacturer.

Chemtrol Valve Construction and Performance Standards

For over 60 years, the construction and performance standards on plastic valves have traditionally been set by Chemtrol products for the industry to follow. Specifying engineers should know that:

1. Chemtrol® valves are 100% seat and shell tested.
2. The sockets of PVC and CPVC Chemtrol valves conform to the dimensional requirements of ASTM Standards D2467 (PVC) and F439 (CPVC) for Schedule 80 Socket pressure fittings. For dimensional details please reference the data on the preceding pages.
3. The threaded end connections of all Chemtrol valves meet ASME B1.20.1 (was ASA B2.1) requirements for National (American) Standard Pipe Taper Pipe Threads and conform to the dimensional requirements of ASTM Standards D2464 (PVC) and F437 (CPVC) for Schedule 80 Threaded pressure fittings.
4. The flanges attached to all Chemtrol valves meet the outside diameter and bolt hole requirements of ANSI B16.5 for 150 lb. Steel Pipe Flanges.
5. The physical and chemical properties of PVC and CPVC are classified and grouped into characteristic materials by ASTM Standard D1784. The materials, used in domestically produced Chemtrol Valves, exceed the rigid requirements set forth for cell class 12454 (PVC) and 23447 (CPVC). These are the respective materials stipulated for use in pipes which merit the highest Hydrostatic Design Stress rating (2000 psi) and the maximum corrosion resistance.
6. Independent third party tested and certified PVC and CPVC Chemtrol Valves are regularly tested for compliance with NSF/ANSI 14 "Plastic Piping System Components and Related Materials" requirements establishing minimum physical, performance, and health effect requirements for the protection of public health and the environment.

Valve Pressure-Loss Calculations

As an aid to system design, fluid flow coefficients (C_v values) are shown for all Chemtrol valves. C_v is defined as the flow, in GPM, through a valve which will produce a pressure drop of 1.0 PSI when the medium is water at 60°F.

To determine the pressure drop for a given condition, the following formula may be used:

$$\Delta P = \frac{Q^2 \text{ S.G.}}{C_v^2}$$

Where ΔP = Pressure drop across the valve in psi

Q = Flow through the valve in gpm

S.G. = Specific gravity of the liquid (water = 1.0)

C_v = Fluid flow coefficient

The solution of an example problem follows. Refer to the product description page in this Valve Guide for C_v values of specific valves.

Example

Find the pressure drop across a 1 1/2" Ball Check Valve with a water flow rate of 50 gpm.

The C_v for the Chemtrol® Check Valve is 56, as shown on page 17.

$$\Delta P = \frac{(50)^2 \times 1.0}{(56)^2}$$

$$\Delta P = \left(\frac{50^2}{56^2} \right)$$

$$\Delta P = .797 \text{ psi}$$

Many commercial, industrial, and governmental standards or specifications are available to assist the design engineer in specifying plastic piping systems. Standards most frequently referred to and most commonly called out in plastic piping specifications are ASTM Standards. These standards also often form the basis of other standards in existence. Below is a list and description of those standards most typically applied to industrial plastic piping.

ASTM D1784

(American Society for Testing and Materials)

This specification covers rigid PVC and CPVC compounds intended for general purpose use in extruded or molded forms including pressure piping applications and nonpressure piping applications composed of poly(vinyl chloride), chlorinated poly(vinyl chloride), or vinyl chloride copolymers containing at least 80% vinyl chloride, and the necessary compounding ingredients.

ASTM D1785 and F441

These standards cover the specification and quality of Schedule 40, 80, and 120 PVC (D1785) and CPVC (F441) pressure pipe. Outlined in these standards are dimensional specifications, burst, sustained, and maximum operating pressure requirements and test procedures for determining pipe quality with respect to workmanship and materials.

ASTM D2466

This standard covers Schedule 40 PVC threaded and socket pressure fittings. Stipulated in the standard are thread and socket specifications, by lengths, wall thickness, burst, material, quality, and identification requirements.

ASTM D2467 and F439

These standards cover Schedule 80 PVC (D2467) and CPVC (F439) Socket Type and Threaded Pressure Fittings. Dimensions, burst strength, resin compound stipulation, and scheme of product identification requirements are specified.

ASTM D2564 and F493

These standards set forth requirements for PVC (D2564) and CPVC (F493) Solvent Cement. The specification identifies the resin compound to be used and stipulates minimum resin content, solution viscosities, and physical performance qualities.

ASTM F656

This specification covers requirements for primers for use with poly(vinyl chloride) (PVC) pipe and fittings that are to be joined by PVC solvent cements meeting the requirements of Specification.

ASTM F1970

This specification covers special engineered fittings or appurtenances for use in PVC or CPVC systems. Flanges, unions, and valves not included in the scope of other ASTM specifications are specifically referenced. Minimum requirements are identified for testing materials, dimensions, marking, and in-plant quality control.

ASTM F1498

This specification adapts the General Purpose American Pipe Thread Specification, ASME B1.20.1, to taper pipe threads for use on plastic pipe and fittings with machined or molded threads. The standard covers dimensions and gaging of plastic tapered National Pipe Threads (NPT) for leak-tight joints, and it is now referenced in all ASTM Standards for plastic piping products.

ASTM D2855

This standard describes the procedure for making joints with PVC pipe and fittings by means of solvent cementing.

ASTM D4101 (Formerly D2146)

This specification covers polypropylene materials suitable for injection molding and extrusion. Polymers consist of homopolymer, copolymers, and elastomer compounded with or without the addition of impact modifiers (ethylene-propylene rubber, polyisobutylene rubber, and butyl rubber), colorants, stabilizers, lubricants, or reinforcements.

ASTM D1599

This standard covers the test method for establishing the short-term hydraulic failure pressure of thermoplastic pipe, tubing, and fitting under specific temperature, time, and method of loading conditions. These test techniques are normally used for quality control.

ASTM D1598

This test method covers the determination of the time-to-failure of both thermoplastic and reinforced thermosetting/resin pipe under constant internal pressure.

ASTM D2837

This standard describes the procedure for obtaining the Hydrostatic Design Basis for all known thermoplastic pipe materials and for any practical temperature and medium. This was achieved by evaluating stress rupture data, taken from tests conforming to ASTM D1598, for the subject material and involved specified treatment and analysis of data.

ASTM D2657

This standard covers the procedure for heat-fusion bonding of polyolefin materials.

ASTM D3222

This standard covers the polymerization method and physical properties of PVDF (polyvinylidene fluoride) Fluoroplastic Materials for molding and extrusion.

Organizations other than ASTM issue standards that are commonly encountered in industrial thermoplastic piping design. The most common standards are described below.

ASME B1.20.1 (was B2.1)

This specification details the dimensions and tolerance for tapered pipe threads. This standard is referenced in the ASTM standards for threaded fittings mentioned above. See Reference Data for details.

ASME B16.5

This specification sets forth standards for bolt holes, bolt circles, and overall dimensions for steel 150# flanges. See Reference Data for details.

NSF/ANSI 14

The physical, performance, and health effects requirements in this Standard apply to thermoplastic and thermoset plastic piping system components, including but not limited to pipes, fittings, valves, joining materials, gaskets, and appurtenances. The established physical, performance, and health effects requirements also apply to materials (resin or blended compounds) and ingredients used to manufacture plastic piping system components. This Standard provides definitions and requirements for materials, ingredients, products, quality assurance, marking, and record keeping.

Fittings and valves made from copper alloys containing more than 15% zinc by weight shall be resistant to dezincification and stress corrosion cracking (SCC) and shall meet the test requirements of this standard.

NSF/ANSI 61

This Standard establishes minimum health effects requirements for the chemical contaminants and impurities that are indirectly imparted to drinking water from products, components, and materials used in drinking water systems. This Standard does not establish performance, taste and odor, or microbial growth support requirements for drinking water system products, components, or materials.

This Standard is intended to cover specific materials or products that come into contact with: drinking water, drinking water treatment chemicals, or both. The focus of the Standard is evaluation of contaminants or impurities imparted indirectly to drinking water. The products and materials covered include, but are not limited to, process media (e.g., carbon, sand), protective materials (e.g., coatings, linings, liners), joining and sealing materials (e.g., solvent cements, welding materials, gaskets), pipes and related products (e.g., pipes, tanks, fittings), mechanical devices used in treatment/transmission/distribution systems (e.g., valves, chlorinators, separation membranes, point-of-entry drinking water treatment systems), and mechanical plumbing devices (e.g., faucets, endpoint control valves).

Technical Service

Technical assistance regarding standards, applications, product performance, design, and installation tips is available from Technical Services Technical Information Hotline: (888) 446-4226 phone; (888) 336-4226 fax.

Polyvinyl Chloride (PVC) Schedule 80 Industrial Pipe and Fittings

Scope:

This specification establishes the manufacturing requirements for PVC Schedule 80 piping components intended for use in industrial, pressure-rated, fluid-handling systems for applications at 140° F or less, where resistance to corrosion is of prime importance.

Materials:

Pipe and fittings shall be manufactured from a PVC compound that meets the requirements of Cell Classification 12454 polyvinyl chloride as outlined in ASTM D1784. PVC shall be gray in color. Pipe and fitting materials shall be specifically formulated with sufficient UV stabilizers to provide for long-term outdoor exposure with no deleterious effects.

Materials from which pipe and fittings are manufactured shall have been tested and approved for conveying potable water by NSF International.

Dimensions/Design (IPS Size):

Socket-end connections shall have diameters, lengths, and wall thicknesses as required by ASTM D2467; taper pipe threaded-end connections shall have thread lengths, diameters, and configurations in conformance with ASTM D2467.

Fittings shall be industrial, heavy-duty, hub style.

Flanges shall be either a one-piece solid or a two-piece Van Stone design that utilizes the tapered, serrated-face and full-face gasket technique for joining and are compatible with ASME B16.5 Class 150 metal flanges.

Unions shall have an O-ring seal and components interchangeable with true union valves for maximum system versatility.

Transition unions, unions intended for joining dissimilar materials, shall utilize components of the two dissimilar materials, joined with an O-ring to absorb the thermal-expansion coefficient differential.

Pipe shall be as prescribed by ASTM D1785 for pressure-rated piping systems.

Pressure Ratings:

Socket fittings shall be rated at the same pressure as the corresponding size pipe prescribed by ASTM D1785. Threaded fittings shall be rated at 50% of the pressure rating of the corresponding size pipe prescribed by ASTM D1785.

Valves, unions, and flanges shall be rated at 150 psi for non-shock water service at 73° F and have a minimum 60 second burst requirement of 3.2 times the rated pressure.

Markings:

Fittings and pipe shall be clearly marked with the manufacturer's name or trademark, material designation, ASTM number or equivalent symbol indicating compliance with applicable standards, NSF International certification mark, NSF-pw, (verifying approval for the conveyance of potable water), and the country of manufacture.

Installation/Maintenance:

Installation and operation shall be as specified by the manufacturer's printed instructions.

Chlorinated Polyvinyl Chloride (CPVC) Schedule 80 Industrial Pipe and Fittings

Scope:

This specification establishes the manufacturing requirements for CPVC Schedule 80 piping components intended for use in industrial, pressure-rated, fluid-handling systems for applications at 210° F or less, where resistance to corrosion at elevated temperatures is of prime importance.

Materials:

Rigid CPVC (chlorinated polyvinyl chloride) used in the manufacture of Schedule 80 piping components shall be Cell Classification 23447 as identified in ASTM D1784. CPVC materials shall be light gray in color. Pipe and fitting materials shall be specifically formulated with sufficient UV stabilizers to provide for long-term outdoor exposure with no deleterious effects. CPVC material used to manufacture pipe and fittings shall be approved for the conveyance of potable water by a third-party certification agency.

Dimensions/Design (IPS Size):

Socket-end connections shall have diameters, lengths, and wall thicknesses as required by ASTM F439; taper pipe threaded-end connections shall have thread lengths, diameters, and configurations in conformance with ASTM F439.

Pipe shall have diameters and wall thicknesses in conformance with the requirements of ASTM F441.

Fittings shall be industrial, heavy-duty, hub style.

Flanges shall be either a one-piece design or a two-piece Van Stone design that utilizes the tapered, serrated-face and full-face gasket technique for joining and are compatible with ASME B16.5 Class 150 metal flanges.

Unions shall have an O-ring seal and components interchangeable with true union valves for maximum system versatility.

Transition unions, unions intended for joining dissimilar materials, shall utilize components of the two dissimilar materials, joined with an elastomeric seal to absorb the thermal-expansion coefficient differential.

Pressure Ratings:

Socket fittings shall be rated at the same pressure as the corresponding size pipe prescribed by ASTM F441. Threaded fittings shall be rated at 50% of the pressure rating as the corresponding size pipe prescribed by ASTM F441.

Valves, unions, and flanges shall be rated at 150 psi for non-shock water service at 73° F, and have a minimum 60 second burst requirement of 3.2 times the rated pressure.

Markings:

Fittings and pipe shall be clearly marked with the manufacturer's name or trademark, material designation, ASTM number or equivalent symbol indicating compliance with applicable standards, NSF International certification mark, NSF-pw, (verifying approval for the conveyance of potable water), and the country of manufacture.

Installation/Maintenance:

Installation and operation shall be as specified by the manufacturer's printed instructions.

250 PSI Tru-Bloc® True Union Ball Valves, Model D

Scope: This specification establishes the requirements for dual blocking (Tru-Bloc) quarter-turn ball valves of PVC and CPVC materials intended for use in industrial, commercial, and residential pressure-piping systems, where cost-effective, long-term resistance to corrosion is of prime importance, and the service temperature does not exceed: PVC, 140°F; CPVC, 210°F.

Major component parts shall be constructed from one of the following:

NPS ½" – 2" PVC (polyvinyl chloride), Cell Classification 12454 per ASTM D1784, industrial gray in color, and the valve shall be full-port Tru-Bloc.

NPS ½" – 2" Corzan® CPVC (Chlorinated polyvinyl chloride), Cell Class 23447 per ASTM D1784, industrial light-port gray in color, and the valve shall be full Tru-Bloc, with the material being pressure rated by an independent third party organization such as PPI (Plastic Piping Institute).

Standard Dimensions: PVC and CPVC socket-end connections shall conform to the dimensional requirements of ASTM D2467 (PVC) and F439 (CPVC) for Schedule 80 pressure fittings.

All threaded-end connections shall conform to the dimensional requirements of ASTM D2467 (PVC) and F439 (CPVC) as well as ASTM F1498.

Performance: Valves shall be rated for 250 psi non-shock water service at 73°F and have a minimum burst rating of 3.2 times rated working pressure.

PVC Valves shall be rated at 165 psi non-shock water service at 120°F, with a minimum burst rating of 3.2 times rated working pressure.

CPVC Valves shall be rated to 190 psi non-shock water service at 120°F and 130 psi at 180°F, with a minimum burst rating of 3.3 times rated working pressure.

Valves shall be certified to ASTM D1970 by a recognized third-party agency such as NSF International.

Markings: Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, ASTM F1970, Country of origin, and bare the NSF-PW-G (verifying listings for conveying potable water, dezincification resistant, and lead-free).

Installation and Operation: Installation and operation shall be as specified by the manufacturer's printed instructions.

150 PSI Tru-Bloc® True Union Ball Valves, Model C

Scope:

This specification establishes the manufacturing requirements for dual-blocking (Tru-Bloc) and downstream-only blocking (true union) quarter-turn ball valves of PVC and CPVC materials intended for use in industrial, commercial, and residential pressure-piping systems, where cost-effective, long-term resistance to corrosion is of prime importance, and the service temperature does not exceed: PVC, 140° F; CPVC, 210° F.

Major component parts shall be constructed from one of the following:

NPS 3 – 6 PVC (polyvinyl chloride), Cell Class 12454 per ASTM D1784, industrial gray in color, and the valve style shall be full-port Tru-Bloc, TU (NPS 6 is standard port).

NPS 3 – 6 Corzan® CPVC (chlorinated polyvinyl chloride), Cell Class 23447 per ASTM D1784, industrial light gray, and the valve style shall be full-port Tru-Bloc, TU (NPS 6 is standard port)

Dimensions/Valve Design:

PVC and CPVC socket-end connections shall conform to the requirements of ASTM D2467 and F439 for Schedule 80 pressure fittings.

All threaded-end connections shall conform to the requirements of ASTM D2467 and F439 as well as ASTM F1498 for tapered pipe threads.

Performance:

Valves shall be rated for 150 psi non-shock water service at 73° F water and have a minimum burst rating of 3.2 times the rated working pressure. Valves shall be certified to ASTM F1970 by a third-party agency.

Markings:

Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, ASTM number or equivalent symbol indicating compliance with applicable standards, and country of manufacture. PVC and CPVC valves shall additionally bear the NSF International certification mark, NSF-pw, (verifying approval for conveyance of potable water).

Installation:

Installation and operation shall be as specified by the manufacturer's printed instructions.

Vented (Bleach) Ball Valves, True Union

Recommended Specification

In the interest of safety, owners of sodium hypochlorite transfer and injection piping systems must have confidence that the PVC or CPVC ball valves in their system were properly manufactured, cleaned, assembled, tested, and oriented during installation in accordance with intended system design. Therefore, engineering specifications for bleach transfer and injection systems should include the following product, installation, and pre-commissioning inspection requirements:

- All PVC or CPVC vented ball valves must be of the True Union type with an energized seat that will concurrently provide automatic adjustment for wear and leak-free service at the lower pressure port. And the ball must contain an adequate vent to the pressure port opposite of the downstream sealing port.
- The manufacturer of all PVC or CPVC vented ball valves must complete all components prior to the factory assembly, test, and packaging of those valves. Modification of assembled valves by any manufacturer or vendor is unacceptable. Also, the valves must be individually packaged with each carton label stating: Vented ball valve, size, material, and manufacturer.
- Vented ball valves must be permanently marked externally with: the word Bleach; two opposing directional arrows, one inscribed with Flow and other with Vent; and the NSF certification mark.

150 PSI Ball Check and Foot Valves

Scope:

This specification establishes the manufacturing requirements for PVC and CPVC ball check and foot valves intended for use in industrial, commercial, and residential pressure-piping systems, where cost-effective, long-term resistance to corrosion is of prime importance. Maximum service temperatures are: PVC, 140° F; CPVC, 210° F.

Materials:

Major component parts shall be constructed from one of the following:

NPS 1/2 – 4 PVC (polyvinyl chloride), Cell Class 12454 per ASTM D1784, industrial gray in color.

NPS 1/2 – 4 CPVC (chlorinated polyvinyl chloride), Cell Class 23447 per ASTM D1784, industrial light gray in color.

Dimensions/Valve Design:

PVC and CPVC socket-end connections shall conform to the requirements of ASTM D2467 and F439 for Schedule 80 pressure fittings. All threaded-end connections shall conform to the requirements of ASTM D2467 and F439 as well as ASTM F1498 for tapered pipe threads.

The valve design shall be full port (NPS 4 size is standard port) with full flow around the rib-guided ball. Foot valve models shall have a minimum cumulative-area ratio of screen holes (inlet)-to-valve port of 3:1.

The valve seat shall be an elastomeric seal that will permit seating at low-head pressure, and an arrow shall be molded on the valve body for permanent visibility to indicate the intended direction of flow.

Markings:

Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, ASTM number or equivalent symbol indicating compliance with applicable standards, and country of manufacture. PVC and CPVC valves shall additionally bear the NSF International certification mark NSF-pw, (verifying approval for conveyance of potable water).

Performance:

Valves shall be rated for 150 psi service at 73° F non-shock water service and have a minimum burst rating of 3.2 times the rated working pressure. Valves shall be certified to ASTM F1970 by a third-party agency.

Installation:

Installation and operation shall be as specified by the manufacturer's printed instructions.

150 PSI Model B Wafer Style Butterfly Valves

Scope:

This specification establishes the manufacturing requirements for PVC and CPVC, Butterfly Valves intended for use in industrial, commercial, and residential pressure-piping systems for service temperatures that do not exceed 140° F for PVC systems or 210° F for CPVC systems, where resistance to corrosion is of prime importance does not.

Materials (PVC NPS 4 & 6, CPVC 3):

The body and disc shall be manufactured from a PVC or CPVC compound that meets the requirements of Cell Class 12454 polyvinyl chloride or Cell Class 23447 chlorinated polyvinyl chloride as outlined in ASTM D1784.

The shaft shall be cadmium-plated steel alloy or 316 stainless steel as standard equipment. Optional shaft materials shall be available on request, i.e., titanium, stainless steel, etc.

The seat material shall be one of the following materials: ethylene-propylene-diene monomer (EPDM) or fluoroelastomer (FKM) with polytetrafluoroethylene (PTFE) bearing support at the top and bottom.

Bearings shall be corrosion-resistant, 20% glass-filled PTFE.

Secondary seal material shall be FKM or EPDM and correspond to the seat material for maximum chemical resistance.

Handles and worm-gear operators shall be of a contrasting color with corrosion-resistant epoxy coating per manufacturer's Engineering Specifications #AP00307002A.

Valve Design:

The valve body shall be of the wafer design for ease of installation and maintenance and shall be compatible with Class 150 ASME B16.5 flanges. Nominal sizes 3 through 6 shall also be compatible with DIN 8063 pattern.

The shaft shall be hexagonal or square to ensure positive rotation of the disc and be totally sealed from exposure to the process liquid.

The shaft shall be guided by glass-filled PTFE bearings to protect against deflection. The shaft also shall have a directional indicator on top to indicate disc position when the handle is removed.

Markings:

Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, and country of manufacture. PVC and CPVC valves shall additionally bear the NSF International certification mark, NSF-pw, (verifying approval for conveyance of potable water).

Performance:

Valves shall be rated bubble-tight at 150 psi 73° F non-shock water service except NPS 6 size shall be de-rated by 25%. The pressure rating shall be based on a minimum safety factor of 3.2.

Operation:

Valves shall be supplied by the manufacturer with one of the following:

- | | |
|----------------------------------|--|
| a. Lever handle with index plate | e. 2" Square Operator Nut |
| b. Worm-Gear Operator | f. 2" Locking Type Square Operator Nut |
| c. Pneumatic Operator | g. Lockable Lever Handle |
| d. Electric Operator | h. Other Manual Accessories |

Installation:

Installation and operation shall be as specified by the manufacturer's printed instructions.

150 PSI Model C Wafer Style Butterfly Valves

Scope:

This specification establishes the manufacturing requirements for PVC and CPVC Butterfly Valves intended for use in industrial, commercial, and residential pressure-piping systems for non-corrosive or mildly corrosive applications, where the service temperature does not exceed 140° F for PVC or 180° F for CPVC.

Materials:

The body shall be manufactured from a PVC or CPVC compound that meets the requirements of Cell Class 12454 polyvinyl chloride or Cell Class 23447 chlorinated polyvinyl chloride as outlined in ASTM D1784.

The disc shall be manufactured of ductile iron as specified in ASTM A536 with EPDM or FKM encapsulation.

The upper and lower shaft shall be manufactured from 416 stainless steel as specified in ASTM A582.

The O-ring seal material shall be manufactured from EPDM or FKM.

The bearing shall be manufactured from PTFE-coated stainless steel backed split design.

The handle is of malleable iron with epoxy coating. The throttling index plates are made of zinc-plated steel.

Valve Design:

Valve body shall be of the wafer design for ease on installation and maintenance and shall be compatible with bolt hole pattern Class 150 ASME B16.5; BS 1560-3 class 150; ISO 7005-3 PN 10; and DIN EN 1092-2 PN 10.

The shaft is splined to lock into the disc to ensure positive rotation. The shaft is guided by PTFE-coated bearings to protect against deflection. Disc position is indicated by the shaft, when the handle is removed.

Laying length is compatible with MSS SP-67 narrow (W-1) and ISO 5752 short.

Markings:

Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, ASTM number or equivalent symbol indicating compliance with applicable standards, country of origin, and pressure rating. Valves additionally bear the ANSI/NSF 61 for PVC and CPVC with EPDM or ANSI/NSF 372 for PVC and CPVC with FKM certification mark, (verifying approval for the conveyance of water).

Performance:

Valves shall be rated bubble-tight at 150 psi 73° F non-shock water service.

Installation:

Installation and operation shall be as specified by the manufacturer's printed instructions.

150 PSI Y-Pattern - Chemcock™ - Calibrated Needle

Scope:

This specification establishes the manufacturing requirements for PVC Schedule 80 specialty valves for use in industrial, pressure-rated, fluid-handling systems in applications up to 140° F, where precise control and corrosion resistance are of prime importance.

Materials:

Rigid PVC (polyvinyl chloride) used in the manufacture of Schedule 80 valves shall be Cell Classification 12454 as identified in ASTM D1784.

Dimensions/Valve Design:

Valves utilizing threaded-end connections shall have thread lengths, diameters, and configurations as required by ASTM D2467 and ASTM F1498.

Hose-barb connections (Chemcock™ Valve) shall be suitable for joining with ¼" to 3/8" I.D. measured flexible hose.

Valves intended for multi-turn throttling control shall be globe design in NPS ¼ – 1.

Y-Pattern for straight 180° installations using internal pipe threads and having double lead-thread stem control for rapid adjustment. Valves shall have glass-filled PTFE seals for positive shut-off and extended service-life and FKM seals for maximum protection against external leaks.

Angle valve for 90° installations using internal pipe threads and having double lead-thread stem control for rapid adjustment. Valves shall have glass-filled PTFE seals for positive shut-off and extended service-life and FKM seals for maximum protection against external leakage.

For maximum versatility, both A and B type valves shall have inter-changeable bonnet/stem assemblies.

Needle valves are intended for use in applications that require precise metering control. Needle valves shall have predictable flow patterns with (8) molded in increments on the body. These valves shall have PTFE seats and FKM seals for maximum service life and protection against external leakage. Needle valves have NPS ¼ internal pipe threaded ends.

Chemcock™ valves are intended for use in laboratory sampling applications. The Chemcock™ valves have NPS ¼ external thread-by-external thread-end connections; however, one end of the valve shall be capable of being changed to hose-threads for maximum versatility.

Pressure Ratings:

Valves shall be rated for 150 psi at 73° F non-shock water service and have a minimum burst requirement of 3.2 times the rated pressure.

Markings:

Valves shall be clearly marked with the manufacturer's name or trademark, nominal size, material designation, and country of manufacture. PVC and CPVC valves shall additionally bear the NSF International certification mark, NSF-pw, (verifying approval for conveyance of potable water).

Installation:

Installation and operation shall be as specified by the manufacturer's printed instructions.

Chemtrol One-Year Limited Warranty

CHEMTROL warrants each Chemtrol® pressure-rated Pipe, Valve, and Industrial Plastic Fitting to be free from defects in materials and workmanship for a period of one (1) year from the date of purchase under normal use and service within limitations recommended by it.

In the event any defect occurs which the owner believes is covered by this Warranty, the owner should immediately contact the authorized CHEMTROL distributor. The owner will be instructed to return said product at the owner's expense to CHEMTROL or an authorized CHEMTROL representative for inspection. In the event said inspection discloses to the satisfaction of CHEMTROL that said product is defective, appropriate action relating to credit or replacement shall be initiated.

THIS WARRANTY SPECIFICALLY EXCLUDES INCIDENTAL AND CONSEQUENTIAL DAMAGES OF EVERY TYPE AND DESCRIPTION RESULTING FROM ANY CLAIMED DEFECT IN MATERIAL OR WORKMANSHIP INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURIES AND PROPERTY DAMAGES. Some states do not allow the exclusion or limitations of incidental or consequential damages so these limitations may not apply to you.

TO THE EXTENT PERMITTED BY LAW, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO ONE (1) YEAR FROM THE TIME OF PURCHASE OF SAID VALVE OR FITTING. Some states do not allow limitations in how long an implied warranty lasts, so the above limitations may not apply to you.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

How to Order

Chemtrol sells its products through select stocking distributors. Our distributors are knowledgeable of plastic applications as well as schooled in the complete Chemtrol product line. **For a listing of distributors in your area, please visit our website www.chemtrol.com.**

NIBCO INC. Customer Service

World Headquarters
1516 Middlebury Street
PO Box 1167
Elkhart, IN 46515-1167 Phone: 800.343.5455
U.S.A. Fax: 800.541.3841

To the best of our knowledge the information contained in this publication is accurate. However NIBCO/Chemtrol does not assume any liability whatsoever for the accuracy or completeness of such information. Final determination of the suitability of any information or product for the use to be contemplated is the sole responsibility of the user. The manner of use and whether or not such use may infringe the patent rights of any party is also the sole responsibility and liability of the user.

Technical Service

Our Technical Service Department is available to provide information and guidance on the suitability of Chemtrol products for specific applications. Recommendations and assistance are also available to engineering and contracting firms for installation specifications and personnel training.

| | |
|---------------------|------------------------|
| Technical Service: | International Service: |
| Phone: 888.446.4226 | Phone: +1.574.295.3221 |
| Fax: 888.336.4226 | Fax: +1.574.295.3455 |

www.chemtrol.com



Corzan® is a registered trademark of The Lubrizol Corporation.
Tru-Bloc® is a registered trademark of NIBCO INC.
Chem-Pure® is a registered trademark of NIBCO INC.
Kynar® is a registered trademark of Arkema Inc.

Every solution
begins with
a good idea.

We've got ideas that flow directly to solutions for your industrial piping applications. Ideas that make your installations easier and more cost-effective. Ideas that work, and ideas that last. Our ideas are strengthened by a sound foundation for growth and a solid commitment to service.

For ideas that fit your flow-control applications, call on us. We're Chemtrol, a product line committed to innovation, growth, and superiority in thermoplastics—ideas whose time has come.

NIBCO INC.
World Headquarters
1516 Middlebury Street
PO Box 1167
Elkhart, IN 46515-1167
USA

Phone: 800.343.5455
Fax: 800.541.3841

Technical Service:
Phone: 888.446.4226

International Service:
Phone: +1.574.295.3327
Fax: +1.574.295.3455

www.chemtrol.com



C-CHP-0518